



2017-  
2018

PROFESSIONAL  
LED STUDIO LIGHT

FALCON EYES LTD.

Address Unit E1, 11/F,Phase 1,  
Hang Fung Building,2G Hok Yuen Street,  
Hung Hom,Kowloon,Hong Kong

Tel 852-2363-2825

Fax 852-2363-3856

Email info@falconeyes.com.hk

Website www.falconeyes.com.hk

We reserve the rights to make any changes due to technical developments.

© Copyright ,Falcon Eyes Ltd.

2018

2017-  
2018



FALCON EYES LTD.



Falcon Eyes  
Official Website (HK)

2018

PROFESSIONAL  
LED  
STUDIO LIGHT

(FALCON EYES) YINGKE | 3rd Building, Dongsheng Industrial Zone (beside The 2nd Dongsheng Road),  
PHOTOGRAPHIC EQUIPMENT FACTORY | Huangdong Village, Fenggang Town, Dongguan City, Guangdong Province, China

www.falconeyes.com.hk



## 关于锐鹰

A B O U T F A L C O N E Y E S

FALCON EYES, founded in 1993, is a well-established manufacturer and exporter of full range of studio equipment with headquarters in Hong Kong. We are keen to pay attention and contribution to the photographic and studio equipment industry in order to satisfy our customer's proliferative needs. With over 20 years experience, our R&D team is very experienced in developing creative and innovative studio equipment which meet the needs of both professionals and amateurs. Our aim is to provide certificated (CE and RoHS), qualified products and exclusive design to our customers.

### Manufacturer Brand

FALCON EYES (Hong Kong) - professional lighting equipment and accessories

### Distribution Brands

1. NOVOFLEX (Germany) - professional photography products
2. MULTIBLITZ (Germany) - professional flash units and accessories
3. COLORTONE (USA) - high quality seamless background paper

Over a decade of development, FALCON EYES has built up a successful and world-wide, including Europe, America, Asia, Russia, Middle-East etc, distribution channel.

We are truly grateful for all staffs' contribution to our company. We would like to take this opportunity to thank all the business partners and photographers who have been supporting FALCON EYES for the last 20 years and the upcoming future. We are looking forward to meeting everyone in different imaging & broadcasting exhibitions (PHOTOKINA, IBC, NAB etc.).

锐鹰有限公司成立于1993年，我们专注于摄影器材及影视灯光领域超过了20载。我们拥有一支富有专业知识及多年经验的研发团队！在生产方面，我们以拥有专业和先进的生产技术，我们都精选了最优质的、性能最优越的和最高科技生产的影视器材产品与零件：

### 自主生产品牌

锐鹰FALCON EYES 锐鹰LED专业影视器材、影楼器材、照相器材及配件

### 代理品牌

- 1、德国NOVOFLEX 路华仕高级专业摄影云台系列产品；
- 2、德国MULTIBLITZ 无敌霸高级专业摄影灯光系列产品；
- 3、美国COLORTONE 加丽高级专业无缝背景纸。

所有电子产品都通过RoHS, Ce等环保及安全认证为我们全球的客户产品品质的保证！

我们致力于“永远创新，追求卓越”的企业宗旨，再加上我们拥有二十多年影视器材的浓厚经验，热诚向全球各国的广大朋友服务。

# CONTENT



## 目录

一、FEATURED ICON INTRODUCTION / 功能图标介绍	02
二、1：DESAL SERIES / 蒂莎系列	04
2：SOPHIEZ LED LIGHT / 苏菲系列导光柔光灯	10
3：LPL-SERIES – MIRR / LPL-镜系列	18
4：ROLL-FLEX-SERIES / 布灯系列	26
5：LED RING LIGHT / LED环形灯系列	34
6：ON-CAMERA LED LIGHT / LED机顶灯	38
7：FELUX LED FRESNEL SERIES / 菲斯聚光灯	42
8：FILMING LED LIGHT / LED灯管系列	50
9：CLASSIC LED PANEL / LED平板灯系列	54
10：SABER-SERIES / 莎贝尔棒灯系列	59
11：BL-6T/6TD / 电池LED摄影摄像灯	64
12：PULSAR / 脉冲星	67
13：BL-10TD / 电池LED摄影摄像灯	70
15：ACCESSORIES / 锂电池及配件	72

# 锐鹰10大特质/功能简介

## FALCON EYES 10 FEATURES AND FUNCTIONS INTRODUCTION

F A L C O N E Y E S



SHARE YOUR MOVE  
互控

Share your move function allow a real time adjustment on multiple fixtures which has equipped SelfEsync receiver. All units under the same channel will be able to communicate. By adjusting any unit, the rest will follow and setting up will be much enjoyable.

互控是一个透过无线2.4G的联控系统, 当使用配备互控功能的灯具时, 在同一频道下的灯具可以互相联控, 令设定灯具变得更方便快捷。



TOUCH READY  
触屏

The new LCD display screen is equipped with touch screen control function. The touch screen control enable a delicate and accurate control experience.

锐鹰把传统的液晶显示屏都加入了触控功能。触屏能让你更准确的作出不同设定。



COLORITE  
高显色

Falcon Eyes LED product which is equipped with High CRI LED bulb. A high colour reproduction is necessary for quality production. Falcon Eyes Colorite LED product is proofed achieving CRI 95. Which is suitable for professional production work.

高显色功能是用来区分配备了高显色LED灯泡的灯具。现时影视制作要求一个较高的色彩还原度, 锐鹰的高显色功能经过测试能达到95+显色度, 适合专案的影视制作使用。



WIFI-READY  
WIFI操控

Falcon Eyes has applied the new Wifi control system on some LED product, which allow user to control multiple units with their smart phone or tablet device. Wifi-Ready product can generate signal to be picked up by smart device through domestic Wifi. With Falcon Eyes control application user can control colour, intensity, and grouping of multiple fixtures.


部份锐鹰的LED产品用配备了WIFI操控, 令用户可以透过智能电话控制多台灯具。配备了WIFI操控的灯具可以透过WIFI发射信号, 用智能电话连接WIFI后便可以收集信号, 直接使用程式操控多台灯具的色温及输出。



DMX-READY  
DMX操控

Falcon Eyes has applied DMX control system on some LED product which is suitable for studio work. The DMX only takes 1 - 2 channels, DAYLIGHT 1 channel, Bi-Colour 2 channels.

部份锐鹰的LED产品用配备了DMX操控, 适合在影室影棚内使用。锐鹰的DMX系统一般只占1-2条DMX频道, 单色一条, 双色两条。

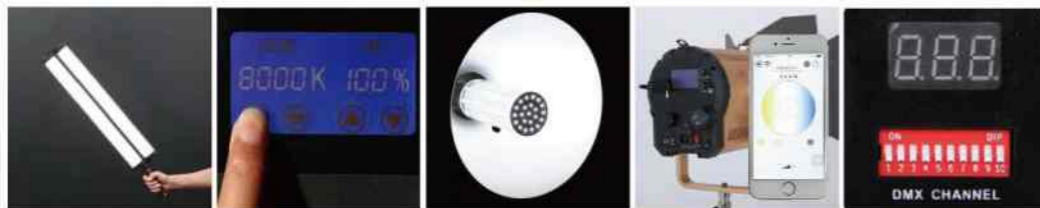

BORN IN THIN  
超薄机身

Mirr-able LED product are designed with a slim housing, allow a higher space saving as well as increase mobility with regular kit bag package. The Mirr-able LED light generate soften light source which is perfect for close up portrait video or photography production.

超薄机身LED产品是设计成方便收纳, 可以放进包包内携带的灯具。超薄机身LED配备了柔光效果, 非常适合作人像拍摄等制作使用。



PROTECT-TO-GO  
防水

Product with Protect-to-go feature are able to use under water spray for short period of time and shall have no harmful effect.

有防水标签的产品可以在潮湿及有水滴的环境下使用, 短时间的使用不会为产品带来任何不良效果。



ROLL-FLEX  
可屈曲

Product with Roll-Flex features are able to roll and bend on using, it is ideal for creating different light form. Please aware that Roll-Flex features are not suitable for folding hard.


有可屈曲标签的产品可以卷曲使用, 适合做成不同的光效。请注意可屈曲的产品不能对折, 会影响灯珠。



QUIET-MODE  
静音模式

Product with Quiet-Mode features are able to switch off the cooling fan and create a noise free environment. Heat protection system is installed and will work if the working temperature is too high to maintain absolute safety. Temperature will be display at the back of fixture.

有静音模式标签的产品能够把散热风扇关掉从而做出一个无噪音的拍摄环境。机背会显示出运作温度, 过热保护会在机件高于75度时作出保护, 保障使用者安全。



BEE DOT  
蜂眼技术

BeeDot feature are equipped to all CLL series LED Fresnel light. The diffuser of the LED Fresnel light is using the Germany BeeDot technique. BeeDot feature enable better condensing and spreading light form and allow the CLL LED Fresnel light achieving 20-60° zoom angle.

蜂眼技术一般都配备在CLL及DLL菲斯聚光灯系列。聚光镜片是使用了德国蜂眼技术制作, 能加强灯光聚焦及泛光效果, 令调焦角度可达20-60度。



RGB  
LIGHTING



# DESAL SERIES 蒂莎系列

Falcon Eyes new DESAL series is a RGBW LED Panel which is able to create different effects with different colors projected by the RGBW LEDs.

The highlight of the DESAL series is that it can use the tungsten and white LED to provide a wide range color temperature choice from 2700K to 9999K. Tungsten and White LED can also separate control with RGB LED which RGB LED can add saturation on different color temperature setting.

RGB LED can be adjust saturation from 0-255 and is able to adjust in digit which able to provide a precise setting to satisfy different requirements.

The DESAL series is also supported with DMX control which allows even more possibility on application. With DMX control DESAL LED panel can be programmed to create different motion background like police car light or any color movement effect. This will be a great solution on broadcasting and staging use.

锐鹰公司最新推出的蒂莎系列全彩柔光灯, 可以利用RGB灯创造出各式各样的灯光效果。

蒂莎系列的亮点在于可以同时利用黄色及白色LED, 而且色温范围广, 可由2700K-9999K。黄色及白色LED也可跟RGB LED同时使用, RGB LED可以在基本色温上作三基色饱和度调整。

RGB 的LED灯珠可以重0-255调较饱和度。而每一项更可以个位数调整, 令用家可以作出精细微调, 满足各种不同设定需要。

蒂莎系列同时亦支援DMX控制系统, 而且可令蒂莎全彩柔光灯的应用富更多可能性。配合DMX控制的蒂莎全彩柔光灯可以输入程式, 作出不同的动感光效, 如警车灯效果, 或其他任何动态光效。这将会成为在影视及舞台上的一个优质解决方案。

F A L C O N E Y E S

PATENT  
PRODUCT!

## DESAL SERIES / 蒂莎系列



DS712A

Input 输入:150W Output 输出:120W  
384pcs x 0.5W<White 白>  
384pcs x 0.5W<Yellow 黄>  
360pcs x 0.3W<RGB 彩色>



Control Box 控制盒

RC-5 遥控器



L-4DS  
(for 4 x DS712A)




L-4DS



2 x CS-2700L  
(for 2 x DS712A)

CS-2700L

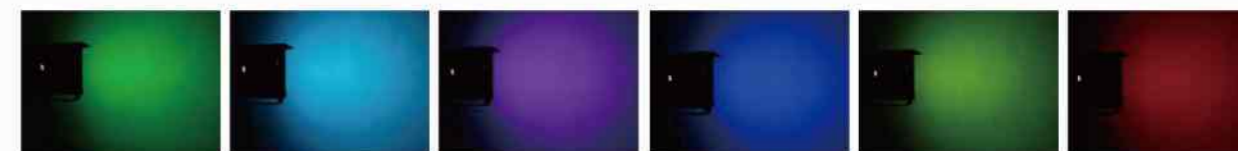

### OPTIONAL ACCESSORIES 选购配件



HC-DS712  
铝合金蜂巢

PLH-DS712  
Foldable Grid 易撑蜂巢

BD-DS712  
BD挡光板

网线(RJ-10)  
网线接DMX插  
(RJ5-4 / RJ5-10)  
DMX延长线  
(DMX-4 / DMX-10)

BP-260VL

SP-XC04H7(4m)  
SP-XC06H7(6m)  
SP-XC08H7(8m)  
SP-XC10H7(10m)


Light Stand  
LM-2900HA/B

YK-006

YK-007

# DESAL SERIES / 蒂莎系列

PATENT PRODUCT!

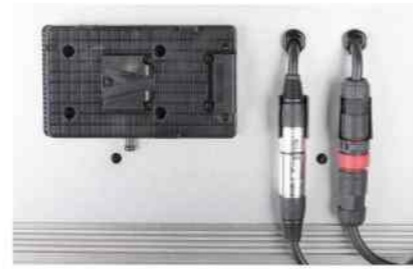


Control Box 控制盒

**DS714A** Input 输入:300W Output 输出:240W

768pcs x 0.5W<White 白> 768pcs x 0.5W<Yellow 黄> 720pcs x 0.3W<RGB 彩色>

COLORITE  
高显色

DMX-READY  
DMX操控

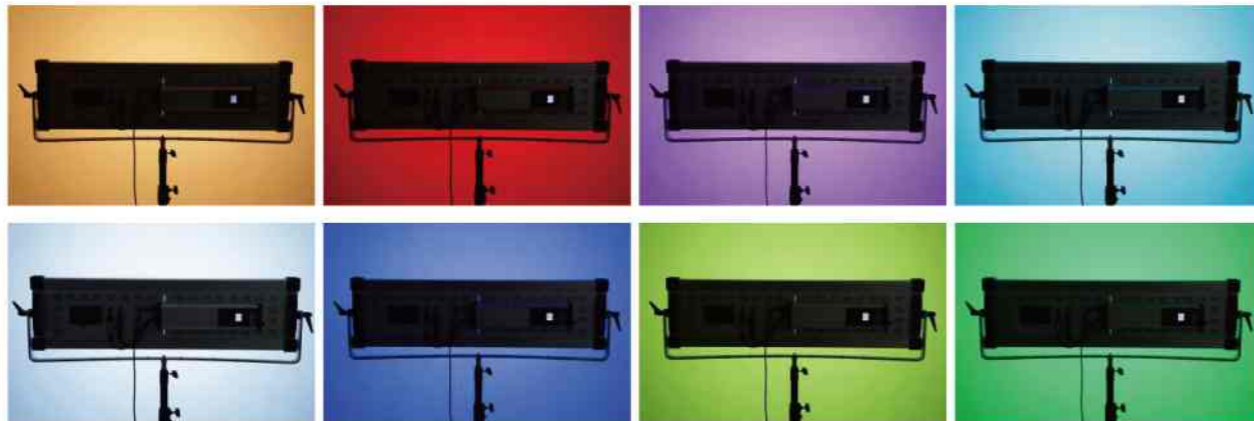

## OPTIONAL ACCESSORIES 选购配件



HC-DS714 铝合金蜂巢  
PLH-DS714 Foldable Grid 易撑蜂巢  
BD-DS714 BD 挡光板  
网线(RJ-10)  
网线接DMX插(RJ5-4 / RJ5-10)  
DMX延长线 (DMX-4 / DMX-10)  
BP-260VL  
SP-XC04H7(4m)  
SP-XC06H7(6m)  
SP-XC08H7(8m)  
SP-XC10H7(10m)  
RC-5 遥控器  
Light Stand LM-3600HL

# DESAL SERIES / 蒂莎系列

PATENT PRODUCT!





DMX-READY  
DMX操控

COLORITE  
高显色

RGB  
LIGHTING

**DS722A** Input 输入:300W Output 输出:240W

768pcs x 0.5W<White 白> 768pcs x 0.5W<Yellow 黄> 720pcs x 0.3W<RGB 彩色>

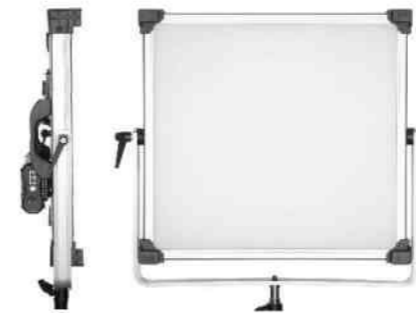

Control Box 控制盒



## OPTIONAL ACCESSORIES 选购配件



HC-DS722 铝合金蜂巢  
PLH-DS722 Foldable Grid 易撑蜂巢  
BD-DS722 BD 挡光板  
网线(RJ-10)  
网线接DMX插(RJ5-4 / RJ5-10)  
DMX延长线 (DMX-4 / DMX-10)  
BP-260VL  
SP-XC04H7(4m)  
SP-XC06H7(6m)  
SP-XC08H7(8m)  
SP-XC10H7(10m)  
RC-5 遥控器  
Light Stand LM-3600HL

# DESAL SERIES / 蒂莎系列

PATENT  
PRODUCT!




COLORITE  
高显色

DMX-READY  
DMX操控



## DS201Pro (蒂莎双色灯 DESAL Bi-Color Model) 768pcs x 0.5W 200W

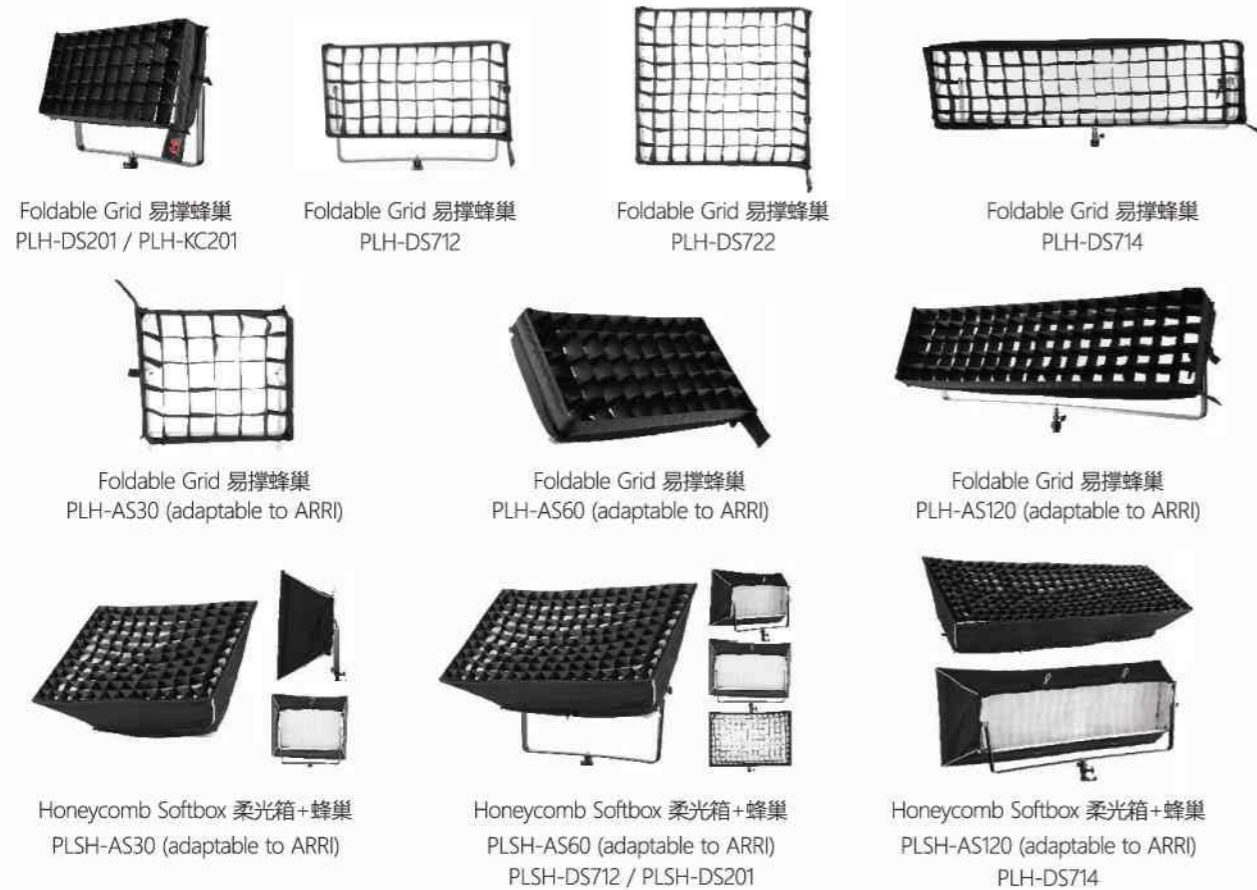

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	DS712A	DS714A	DS722A	DS201Pro
LEDs LED灯泡数	384pcs x 0.5W<White白> 384pcs x 0.5W<Yellow黄> 360pcs x 0.3W<RGB彩色>	768pcs x 0.5W<White白>/768pcs x 0.5W<Yellow黄> 720pcs x 0.3W<RGB彩色>		768pcs x 0.5W
Wattage 功率	Input 输入:150W Output 输出:120W		Input 输入:300W Output 输出:240W	200W
Color Temperature 色温	2700K-9999K			
Operating Voltage 工作电压	DC-24V 8A	AC 110-240V 60 HZ/50HZ		DC-24V 10A
Compatibility 兼容性	AC Adaptor适配器 Sony V Mount Battery (DC) V卡口电池座	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座		AC Adaptor适配器 Sony V Mount Battery (DC) V卡口电池座
Dimming 调光	0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮			
Beam Angle 照射角度	65°			
Control Function 调控方式	ON/OFF 开关 Color Matrix Display点阵液晶彩屏 DMX-512 Turning Knob 旋钮 REMOTE CONTROL 遥控(RC-5)			
CRI 显色度	95			
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	5600K:0.5M 8880/1M 2720/2M 773(配RGB) 5600K:0.5M 8440 / 1M 2560 / 2M 685 2700K:0.5M 7700 / 1M 2110 / 2M 580	5600K:0.5M 14400/1M 5280/2M 1650(配RGB) 5600K:0.5M 12100 / 1M 4440 / 2M 1380 2700K:0.5M 11300 / 1M 4170 / 2M 1300	5600K:0.5M 18200/1M 5830/2M 1710(配RGB) 5600K:0.5M 15000 / 1M 4840 / 2M 1440 2700K:0.5M 14100 / 1M 4530 / 2M 1350	5500K: 0.5M 12900/ 1M 3570 / 2M 975 2700K: 0.5M 11900 / 1M 3300 / 2M 882
Footcandles 英尺烛光	5600K:0.5M 825 / 1M 253 / 2M 72(配RGB) 5600K:0.5M 784 / 1M 238 / 2M 64 2700K:0.5M 716 / 1M 196 / 2M 54	5600K:0.5M 1338 / 1M 491 / 2M 153(配RGB) 5600K:0.5M 1125 / 1M 413 / 2M 128 2700K:0.5M 1050 / 1M 388 / 2M 121	5600K:0.5M 1691 / 1M 542 / 2M 159(配RGB) 5600K:0.5M 1394 / 1M 449 / 2M 134 2700K:0.5M 1310 / 1M 421 / 2M 125	5500K: 0.5M 1199 / 1M 332 / 2M 91 2700K: 0.5M 1106 / 1M 307 / 2M 82
Mounting Method 安装配套	U-Bracket U架			
Dimensions 机身尺寸	630×332×150mm	1185×330×150mm	630×590×150mm	605×352×150mm
Weight 重量	Housing机身:5.37KG Control Box控制盒:0.82KG AC Adaptor 10A适配器:0.9KG	Housing机身:9.98KG Control Box控制盒:3.32KG	Housing机身:8.06KG Control Box控制盒:3.32KG	Housing机身:5.37KG Control Box控制盒:0.82KG AC Adaptor 10A适配器:0.9KG
Noise Level (dB) 噪音(分贝)	/	/	/	0.2M:40.5dB 0.5M:36.9dB
In the box 配件	AC Adaptor 适配器 U-Bracket U架 BAG 布袋	U-Bracket U架 BAG 布袋		AC Adaptor 适配器 U-Bracket U架 BAG 布袋
Optional Accessories 选购配件	Foldable Grid易撑蜂巢PLH-DS712 HC-DS712 铝合金蜂巢 BD-DS712 BD挡光板 10米DMX512网线 10米网线转三孔 锂电池:BP-260VL RC-5 遥控器 Light Stand 灯架 LM-2900HA/B 铝箱 YK-006/YK-007 SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m)	Foldable Grid易撑蜂巢PLH-DS714 HC-DS714 铝合金蜂巢 BD-DS714 BD挡光板 10米DMX512网线 10米网线转三孔 Light Stand 灯架: LM-3600HL RC-5 遥控器 SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m)	Foldable Grid易撑蜂巢PLH-DS722 HC-DS722 铝合金蜂巢 BD-DS722 BD挡光板 10米DMX512网线 10米网线转三孔 Light Stand 灯架: LM-3600HL RC-5 遥控器 SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m)	Foldable Grid易撑蜂巢PLH-DS201 HC-DS201 铝合金蜂巢 BD-DS201 BD挡光板 10米DMX512网线 10米网线转三孔 锂电池:BP-260VL RC-5 遥控器 Light Stand 灯架 LM-2900HA/B 铝箱 YK-006/YK-007 SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m)

# SOPHIEZ LED LIGHT

## 苏菲系列导光柔光灯

The new SOPHIEZ-series LED light is designed in mirror style providing extremely soft lighting for all applications. Any objects under the illumination of SOPHIEZ LED light would look soft and fantastic without the help of additional soft light modifiers.

The SOPHIEZ Series LED light comes in different shapes, round, square, and rectangle.

SO-28TD / 28W / Dia. 30cm; SO-48TD / 48W / Dia. 40cm; SO-68TD / 68W / Dia. 60cm; SO-40TD / 40W / 30x30cm; SO-60TD / 60W / 40x40cm; SO-66TD / 66W / 30x60cm.

All SO-TDX version is implanted with DMX feature, and remote control feature (with RC-3T).

SO-88TDX / 88W / 60x60cm / DMX / Remote Control (RC-3T); SO-108TDX / 108W / Dia. 78cm / DMX / Remote Control (RC-3T); SO-148TDX / 148W / Dia. 100cm / DMX / Remote Control (RC-3T); SO-178TDX / 178W / Dia. 120cm / DMX / Remote Control (RC-3T).

All SOPHIEZ models have the ability to adjust color temperature from 3000K - 5600K, with high CRI and TLCI of 95+. The latest technology program has been applied to the SOPHIEZ for a better power output which enable a 100% brightness for the full range of color temperature from 3000K-5600K.

A delicate control box is attached at the back of the light with LCD touch screen control, desirable color and power setting can be adjusted easily. Share Your Move (mutual control) is also applied to the control box allowing an easy operation with multiple units. Lastly, the all SOPHIEZ models are compatible with both AC and DC power to suit for on location work or studio production.

锐鹰全新苏菲灯是一款采用了镜面效果，令出来的光线非常柔和，不需要配合使用其他柔光配件已可达到柔光效果，非常适合各类影视制作使用。

SOPHIEZ系列LED灯具有不同的形状可供选择：圆形，正方形和长方形。

SO-28TD / 28W / 直径 30cm; SO-48TD / 48W / 直径 40cm; SO-68TD / 68W / 直径 60cm; SO-40TD / 40W / 30x30cm; SO-60TD / 60W / 40x40cm; SO-66TD / 66W / 30x60cm。

所有SO-TDX版本植入了DMX系统，和接收功能配合RC-3T遥控器使用。

SO-88TDX / 88W / 60x60cm / DMX / 遥控功能 (RC-3T); SO-108TDX / 108W / 直径 78cm / DMX / 遥控功能 (RC-3T); SO-148TDX / 148W / 直径 100cm / DMX / 遥控功能 (RC-3T); SO-178TDX / 178W / 直径 120cm / DMX / 遥控功能 (RC-3T)。

所有苏菲灯都可以调节色温(3000K-5600K)，显色度 (CRI / TLCI) 更可达 95+。新技术LED灯珠采用了更明显的功率调配及排列，使其于任何色温都可以100%的亮度输出，光线控制更平均，更稳定。

机背配备了触控控制盒，令你可以更准确地调节色温及亮度输出，制造出最理想的光源。苏菲灯加入了互控功能，于使用多灯操作时更得心应手。配备了交流和直流能源驱动，令对户外及影室制作更加方便。

F A L C O N E Y E S

PATENT  
PRODUCT!

SO-28/48/68TD



SO-28TD



SO-48TD



SO-68TD



SO-28TD

5600K	Distance距离	0.5m	1m	2m
	LUX照度	2460	623	160
3000K	Distance距离	0.5m	1m	2m
	LUX照度	2310	570	149



SO-48TD

5600K	Distance距离	0.5m	1m	2m
	LUX照度	4700	1260	341
3000K	Distance距离	0.5m	1m	2m
	LUX照度	3300	889	269



SO-68TD

5600K	Distance距离	0.5m	1m	2m
	LUX照度	5920	1660	467
3000K	Distance距离	0.5m	1m	2m
	LUX照度	4190	1190	336



BORN IN THIN  
超薄机身



COLORITE  
高显色



SHARE YOUR MOVE  
互控



TOUCH READY  
触屏



# SO-28/48/68TD

PATENT  
PRODUCT!



## OPTIONAL ACCESSORIES 选购配件



## PRODUCT SPECIFICATION 产品参数

Model No. 型号	SO-28TD	SO-48TD	SO-68TD
LEDs & Power LED灯泡数及功率	120pcs x 0.5W	240pcs x 0.5W	360pcs x 0.5W
Out put Wattage 输出功率	28W	48W	68W
Color Temperature 色温	3000K-5600K		
Operating Voltage 工作电压	DC-15V 3A	DC-15V 5A	DC-15V 7A
Compatibility 兼容性	AC Adaptor 适配器 Sony F Mount Battery 锂电池 (x 1)	AC Adaptor 适配器 Sony V Mount Battery (DC) V-卡口电池座 Sony F Mount Battery 锂电池 (x 2)	
Dimming 调光	Color Temperature 3000-5600K / 0-100% Intensity 色温 3000-5600K / 0-100% 无极调光		
Beam Angle 照射角度	65°		
Control Function 调控方式	Touch Screen 触屏    2.4G Mutual Control 互控		
CRI 显色度	95		
Lux 照度	5600K: 0.5M 2460 / 1M 623 / 2M 160 3000K: 0.5M 2310 / 1M 570 / 2M 149	5600K: 0.5M 4700 / 1M 1260 / 2M 341 3000K: 0.5M 3300 / 1M 889 / 2M 269	5600K: 0.5M 5920 / 1M 1660 / 2M 467 3000K: 0.5M 4190 / 1M 1190 / 2M 336
Footcandles 英尺烛光	5600K: 0.5M 527 / 1M 58 / 2M 15 3000K: 0.5M 215 / 1M 53 / 2M 14	5600K: 0.5M 437 / 1M 117 / 2M 32 3000K: 0.5M 307 / 1M 83 / 2M 25	5600K: 0.5M 550 / 1M 154 / 2M 43 3000K: 0.5M 389 / 1M 110 / 2M 31
Mounting Method 安装配套	U-BRACKET U架		
Dimensions 机身尺寸	Φ300mm(Inter dia/发光面) 370×345×60mm	Φ400mm(Inter dia/发光面) 485×465×65mm	Φ600mm(Inter dia/发光面) 685×670×65mm
Weight 重量	1.13kg	2.33kg	4.1kg
In the box 配件	AC Adaptor 适配器15V/3A BAG 布袋	AC Adaptor 适配器15V/5A BAG 布袋 AD-PS1 转换器	AC Adaptor 适配器15V/7A BAG 布袋 AD-PS1 转换器
Optional Accessories 选购配件	Light Stand 灯架: I-2001/B Sony F-mount Li-ion Battery 锂电池: NP-F750F/NP-F960F Battery Charger 充电器: SP-CHG 手持外拍杆: MB-950H	Li-ion Battery 锂电池: BP-100L Battery Charger 充电器: FC-B1 Sony F-mount Li-ion Battery 锂电池: NP-F750F/NP-F960F Battery Charger 充电器: SP-CHG Light Booms 横臂灯架: LSB-3 Light Stand 灯架: I-2501	Li-ion Battery 锂电池: BP-100L Battery Charger 充电器: FC-B1 Sony F-mount Li-ion Battery 锂电池: NP-F960F Battery Charger 充电器: SP-CHG Light Booms 横臂灯架: LSB-4 Light Stand 灯架: I-2601/B



# SO-40/60/66TD

PATENT  
PRODUCT!



**SO-40TD**

5600K  
Distance距离 0.5m 1m 2m  
LUX照度 3800 921 242

3000K  
Distance距离 0.5m 1m 2m  
LUX照度 3400 888 223



**SO-60TD**

5600K  
Distance距离 0.5m 1m 2m  
LUX照度 4240 1140 303


3000K  
Distance距离 0.5m 1m 2m  
LUX照度 4090 1110 290




**SO-66TD**

5600K  
Distance距离 0.5m 1m 2m  
LUX照度 4910 1410 377


3000K  
Distance距离 0.5m 1m 2m  
LUX照度 4450 1290 344




BORN IN THIN  
超薄机身






COLORITE  
高显色



SHARE YOUR MOVE  
互控



TOUCH READY  
触屏

显色指数 CRi(Ra)	94
Re(R1-R15)	91
光色品质 CQS	94
TLCl(Qa)	96.5
GAI	56.8
TM-30-15 Rf	91
TM-30-15 Rg	98

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	SO-40TD	SO-60TD	SO-66TD
LEDs & Power LED灯泡数及功率	200pcs x 0.5W	300pcs x 0.5W	330pcs x 0.5W
Out put Wattage 输出功率	40W	60W	66W
Color Temperature 色温	3000K-5600K		
Operating Voltage 工作电压	DC-15V 5A	DC-15V 7A	
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座    Sony F Mount Battery 锂电池 (x 2)		
Dimming 调光	Color Temperature 3000-5600K / 0-100% Intensity 色温 3000-5600K / 0-100% 无极调光		
Beam Angle 照射角度	65°		
Control Function 调控方式	ON/OFF 开关    Touch Screen 触屏    2.4G Mutual Control 互控		
CRI 显色度	95		
Lux 照度	5600K: 0.5M 3800 / 1M 921 / 2M 242 3000K: 0.5M 3400 / 1M 888 / 2M 223	5600K: 0.5M 4240 / 1M 1140 / 2M 303 3000K: 0.5M 4090 / 1M 1110 / 2M 290	5600K: 0.5M 4910 / 1M 1410 / 2M 377 3000K: 0.5M 4450 / 1M 1290 / 2M 344
Footcandles 英尺烛光	5600K: 0.5M 353 / 1M 86 / 2M 22 3000K: 0.5M 316 / 1M 83 / 2M 21	5600K: 0.5M 394 / 1M 106 / 2M 28 3000K: 0.5M 380 / 1M 103 / 2M 27	5600K: 0.5M 456 / 1M 131 / 2M 35 3000K: 0.5M 413 / 1M 120 / 2M 32
Mounting Method 安装配套	U-BRACKET U架		
Dimensions 机身尺寸	385×350×60mm	495×480×60mm	680×405×60mm
Weight 重量	1.87kg	3.05kg	3.3kg
In the box 配件	AC Adaptor 适配器15V/5A BAG 布袋 AD-PS1 转换器	AC Adaptor 适配器15V/7A BAG 布袋 AD-PS1 转换器	
Optional Accessories 选购配件	Li-ion Battery 锂电池: BP-100L    Battery Charger 充电器:FC-B1 Sony F-mount Li-ion Battery 锂电池: NP-F750F/NP-F960F Battery Charger 充电器:SP-CHG Light Booms 横臂灯架:LSB-3    Light Stand 灯架: I-2501		

# SO-88/108/148/178TDX

PATENT  
PRODUCT!



## SO-88TDX

88W

670×700×90mm  
柔光板 600 x 600mm



## SO-108TDX

108W

880×865×100mm  
柔光板(直径)  
Dia. 780mm



## SO-148TDX

148W

1110×1090×100mm  
柔光板(直径)  
Dia. 1000mm



### OPTIONAL ACCESSORIES 选购配件



## PRODUCT SPECIFICATION 产品参数

Model No. 型号	SO-88TDX	SO-108TDX	SO-148TDX
LEDs & Power LED灯泡数及功率	440pcs x 0.5W	480pcs x 0.5W	660Pcs×0.5W
Out put Wattage 输出功率	88W	108W	148W
Color Temperature 色温	3000K-5600K		
Operating Voltage 工作电压	DC-15V 7A	DC-15V 8.5A	DC-15V 10A
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座		
Dimming 调光	0-100%Step-less dimming 0-100%无级调光 Color Dimming 3000K-5600K 色温调控 3000K-5600K		
Beam Angle 照射角度	68°	72°	75°
Control Function 调控方式	touch screen, remote control, DMX 512, Turning Knob 触屏, 遥控, DMX-512, 旋钮		
CRI 显色度	95		
Lux 照度	5600K: 0.5M6040 / 1M 1940 / 2M 549 3000K: 0.5M 5040 / 1M 1660 / 2M 461	5600K: 0.5M 5600 / 1M 1940 / 2M 571 3000K: 0.5M 4460 / 1M 1590 / 2M 462	5600K /0.5M 6140/1M 2300/2M 677/3M 337 3000K /0.5M 5590/1M 2010/2M 631/3M 316
Footcandles 英尺烛光	5600K: 0.5M 561 / 1M 180 / 2M51 3000K: 0.5M 468 / 1M 154 / 2M43	5600K: 0.5M 520 / 1M 180 / 2M 53 3000K: 0.5M 414 / 1M 148 / 2M 43	5600K / 0.5M 571 / 1M 214 / 2M 63 / 3M 31 3000K / 0.5M 520 / 1M 187 / 2M 59/3M 29
Mounting Method 安装配套	U-BRACKET U架		
Dimensions 机身尺寸	670×700×90mm	880×865×100mm	1110×1090×100mm
Weight 重量	5.9kg	8.6kg	13.5kg
In the box 配件	AC Adaptor 适配器15V BAG 布袋		
Optional Accessories 选购配件	Li-ion Battery 锂电池: BP-160 Battery Charger 充电器:FC-B1 Light Booms横臂灯架:LSB-4 Light Stand 灯架: I-2601/B RC-3T遥控器		Li-ion Battery 锂电池: BP-250L Battery Charger 充电器:FC-B1 Light Booms横臂灯架:LSB-8 Light Stand 灯架: LM-2900HA/B RC-3T遥控器

# SERIES-MIRR 镜系列

PATENT  
PRODUCT!

## LPL-SERIES-MIRR / LPL-镜系列

The LPL series is a new slim soft LED fill light develop by Falcon Eyes on 2015.

The LPL series equipped with new SMD LED which allow our R&D team to design in thin and streamline metal housing. All models are equipped with a front diffuser which can generate soften light source. With CRI 95 readings, it can generate great light source for video and photography production.

The design has also considered maximizing the mobility and usage which AC/DC operation is enabled. Each light is included a durable carrying bag or case. The LPL series has developed into two versions, Tungsten / Daylight (3000K/5600K) and Bi-Color (3000-8000K).

LPL镜系列是一款全新推出的超薄型LED灯板,设计主要以机薄,轻量,便于携带为主。LPL系列特别采用了金属机壳来保护机身及令其有更佳重量比率。机面配备的柔光板有助提供柔和均匀的光线,配合优质的LED灯片可达至显色指数CRI 95,非常适合任何照片及视频拍摄。

LPL的设计上亦同时考虑到各种使用情况及流动性,所以配备了AC及DC驱动系统,让用户在室内室外也能够使用。每款型号更标配耐用提包,令携带更方便。LPL系列主要分为两个类别,暖光灯/日光灯(3000K/5600K)及互控双色温灯(3000-8000K)。

## LPL-S SERIES-MIRR / LPL-S 柔光镜系列

The brand new upgraded LPL-S series share the same "DNA" as the existing LPL series, with the lightweight, slim LED panel producing very soft and even lighting for all applications.

LPL-S series has launched with an even softer lighting effect, "S" stands for SOFTER. Our R&D department has developed the LPL-S series in which "NO LED bulb" can be seen on the appearance, illuminating in a complete plain white diffuser in order to produce the extreme soft light with soft shadow, without the help of extra light modifiers.

The new SMD LED bulbs allow our R&D team to design in thin and streamline metal housing, with CRI 95+ readings, it can generate great light source for both video and photography production.

The design has also considered maximizing the mobility and usage which AC / DC (V-mount or AB mount battery compatible) operation is enabled.

Each light is included with a durable carrying bag or case.

LPL-S are classify into two versions

LPL-S-T: Tungsten/Daylight (3200K/5600K)

LPL-S-TD: Bi-Color (3000-5600K) mutual control feature - Share Your Move

全新升级的LPL-S系列贯彻上一代LPL系列的特质,拥有超薄型机身,设计主要是提供高品质柔光效果,以轻量,便于携带为主。

LPL-S系列于设计上加强了更柔和的照明效果,"S"代表更柔和的意思。Falcon Eyes的研发部门把LPL-S柔光镜设计成一块雪白的柔光板,令LED灯泡不可从外观上看见,使其在没有任何柔光配件下也能做出超柔光效果。

LPL-S系列特别采用了金属机壳来保护机身及令其有更佳重量比率,配合优质的LED灯片可达至显色指数CRI 95+,非常适合任何照片及视频拍摄。

LPL-S的设计上亦同时考虑到各种使用情况及流动性,所以配备了AC及DC(V型及AB型卡口电池兼容)驱动系统,让用户在室内室外也能够使用。

每款型号更标配耐用提包,令携带更方便。

LPL-S系列主要分为两个类别:

LPL-S-T: 黄光/日光灯(3200K/5600K) LPL-S-TD: 双色温灯(3000-5600K) 互控功能 - Share Your Move

PATENT  
PRODUCT!

# LPL-SERIES-MIRR / LPL-镜系列

### LPL-1602T

BORN IN THIN 超薄机身

COLORITE 高显色

显色指数 CRI(Ra)	94
Re(R1-R15)	91
光色品质 CQS	93
TLCI(Ga)	96.6
GAI	55.9

LPL-1602T  
Distance距离 1m 2m  
LUX照度 744 197

## IN THE BOX 配件



## OPTIONAL ACCESSORIES 选购配件



## LPL-1602T-K3 3pcs x LPL-1602T 1pcs x WPC-3.1 3pcs x I-2001/B with bag 连灯架袋 (Optional 选购)



# LPL-SERIES-MIRR / LPL-镜系列




PATENT  
PRODUCT!



BORN IN THIN  
超薄机身




COLORITE  
高显色



显色指数 CRI(Ra)	93
Re(R1~R15)	90
光色品质 CQS	93
TLCI(Qa)	95.4
GAI	65.9



LPL-2802T		
Distance距离	1m	2m
LUX照度	904	278



## IN THE BOX 配件



Adaptor DC-15V 5A  
适配器DC-15V 5A  
V-Mount battery plate  
V卡口电池座

CX-5R

Carry Bag 布袋

SPR-200B

## OPTIONAL ACCESSORIES 选购配件



BL-100L  
Sony V-mount

SP-XC04(4m)  
SP-XC06(6m)  
SP-XC08(8m)  
SP-XC10(10m)

CL-25U 夹子

Light Stand 灯架  
I-2501/B

AD-PS1/AD-PS1A

## LPL-2802T-K2

2pcs x LPL-2802T 1pcs x BGE-10L



BGE-10L (100x22x14CM)

# LPL-SERIES-MIRR / LPL-镜系列

PATENT  
PRODUCT!



TOUCH READY  
触屏



BORN IN THIN  
超薄机身



COLORITE  
高显色



SHARE YOUR MOVE  
互控



LPL-3602TD		
Distance距离	1m	2m
LUX照度	1260	336

LPL-6002TD			
Distance距离	0.5m	1m	2m
LUX照度	6880	2100	575

## IN THE BOX 配件



Carrying Bag  
布袋(3602)

Carrying Bag  
布袋(6002)



## LPL-3602TD

显色指数 CRI(Ra)	94
Re(R1~R15)	92
光色品质 CQS	87
TLCI(Qa)	90.1
GAI	104.1

3000K

5600K

8000K



## LPL-6002TD

显色指数 CRI(Ra)	95
Re(R1~R15)	92
光色品质 CQS	88
TLCI(Qa)	90.7
GAI	102.5

3000K

5600K

8000K

## OPTIONAL ACCESSORIES 选购配件



BL-100L Sony V-mount  
(LPL-3602TD)

BL-160 Sony V-mount  
(LPL-6002TD)


AD-PS1

AD-PS1A

SP-XC04(4m)  
SP-XC06(6m)  
SP-XC08(8m)  
SP-XC10(10m)

Light Stand 灯架  
I-2601/B

LPL-S1602T、LPL-S2802T、LPL-S5602T/TD

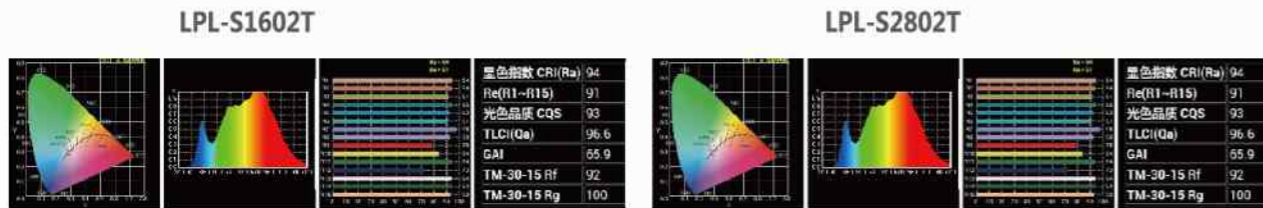

LPL-S1602T (5600k)  
Distance距离 0.5m 1m 2m  
LUX照度 650 261 181

LPL-S2802T (5600k)  
Distance距离 0.5m 1m 2m  
LUX照度 3720 1280 378

LPL-S5602T (5600k)  
Distance距离 0.5m 1m 2m  
LUX照度 7070 2500 740



IN THE BOX 配件




Adaptor DC-15V 5A  
适配器DC-15V 5A  
V-Mount battery plate  
V卡口电池座

OPTIONAL ACCESSORIES 选购配件



CX-5R  
Carry Bag 布袋  
BL-100L  
Sony V-mount  
SP-XC04(4m)  
SP-XC06(6m)  
SP-XC08(8m)  
SP-XC10(10m)  
CL-25U 夹子  
Light Stand 灯架  
I-2001/B  
BD挡光板  
(LPL-S1602T)  
AD-PS1/AD-PS1A

LPL-S3602T/TD、LPL-S6002T/TD



LPL-S3602T (5600k)  
Distance距离 0.5m 1m 2m  
LUX照度 8010 2110 576

LPL-S3602TD (3000k)  
Distance距离 0.5m 1m 2m  
LUX照度 7480 1920 524



LPL-S6002T (5600k)  
Distance距离 0.5m 1m 2m  
LUX照度 11600 3480 949

LPL-S6002TD (3000k)  
Distance距离 0.5m 1m 2m  
LUX照度 10500 3340 880

IN THE BOX 配件



Carrying Bag 布袋(3602)  
Carrying Bag 布袋(6002)

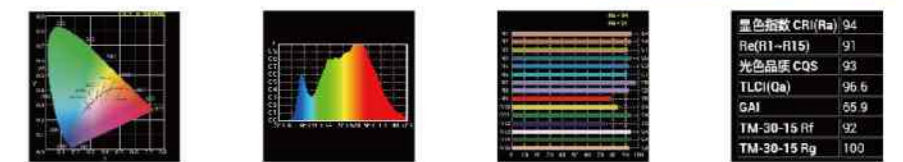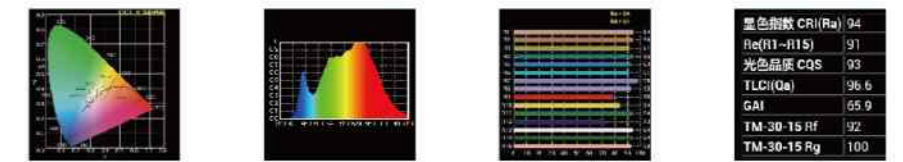

OPTIONAL ACCESSORIES 选购配件



BL-100L Sony V-mount (LPL-S3602T/TD)  
BL-160 Sony V-mount (LPL-S6002T/TD)  
AD-PS1  
AD-PS1A  
BD挡光板 (LPL-S3602T/TD)  
SP-XC04(4m)  
SP-XC06(6m)  
SP-XC08(8m)  
SP-XC10(10m)  
Light Stand 灯架 I-2601/B

## PRODUCT SPECIFICATION 产品参数

Model No. 型号				
	LPL-1602T	LPL-2802T	LPL-3602TD	LPL-6002TD
LEDs LED灯泡数	160pcs x 0.2W	512pcs x 0.2W	576pcs x 0.2W	960pcs x 0.2W
Wattage 功率	32W	56W	72W	120W
Color Temperature 色温	3000K and 5600K Alternative 3000k或5600k二选一		3000K-8000K	
Operating Voltage 工作电压	DC-15V 5A		DC-15V 7A	DC-15V 8.5A
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座			
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光		Color Temperature 3000-8000K / 0-100% Intensity 色温 3000-8000K / 0-100% 无极调光	
Control Function 调控方式	Turning Knob 旋钮		Touch Screen 触屏	Mutual Control 互控
Beam Angle 照射角度	80°			
CRI 显色度	95			
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	0.5M:2850 1M:744 2M:197	0.5M:2930 1M:904 2M: 278	0.5M:3680 1M:1260 2M: 336	0.5M:6880 1M:2100 2M: 575
Footcandles 英尺烛光	0.5M:265 1M:69 2M: 18	0.5M:272.3 1M:84 2M: 25.8	0.5M:342 1M:117 2M: 31	0.5M:639 1M:195 2M:53
Mounting Method 安装配套	U-BRACKET U架	Supporting Rod 支撑杆: SPR-200B	U-Bracket U架	U-Bracket U架
Dimensions 机身尺寸	315×200×24mm	960×100×24mm	430×290×24mm	690×300×24mm
Weight 重量	1.7KG	2.1KG	3.2KG	4.8KG
In the box 配件	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 5A 适配器DC-15V 5A Control Box 控制盒 V-Mount battery plate V卡口电池座	SPR-200B 支撑杆 Carry Bag 布袋 Adaptor DC-15V 5A 适配器DC-15V 5A Control Box 控制盒 V-Mount battery plate V卡口电池座	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 7A 适配器DC-15V 7A Control Box 控制盒 V-Mount battery plate V卡口电池座 Control Box Clip 控制盒夹: CL-25U	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 8.5A 适配器DC-15V 8.5A Control Box 控制盒 V-Mount battery plate V卡口电池座 Control Box Clip 控制盒夹: CL-25U
Optional Accessories 选购配件	Light Stand 灯架: I-2001/B Li-ion Battery 锂电池: BP-100L WPC 3.1 Water Proof Case 抗压防水箱	Light Stand 灯架: I-2501 Li-ion Battery 锂电池: BP-100L BG-10L HARD CASE 手提箱	Light Stand 灯架: I-2601/B Li-ion Battery 锂电池: BP-100L Li-ion Battery 锂电池: BP-160	Light Stand 灯架: I-2601/B Li-ion Battery 锂电池: BP-160


## PRODUCT SPECIFICATION 产品参数

Model No. 型号					
	LPL-S1602T	LPL-S2802T	LPL-S5602T/TD	LPL-S3602T/TD	LPL-S6002T/TD
LEDs LED灯泡数	160pcs x 0.2W	512pcs x 0.2W	1024pcs x 0.2W(T) 1024pcs x 0.5W (TD)	576pcs x 0.2W (T) 576pcs x 0.5W (TD)	960pcs x 0.2W (T) 960pcs x 0.5W (TD)
Wattage 功率	32W	56W	112W	72W	120W
Color Temperature 色温	3000K and 5600K Alternative 3000k或5600k二选一		3000K and 5600K Alternative 3000k或5600k二选一 (T) 3000K-5600K(TD)		
Operating Voltage 工作电压	DC-15V 5A		DC-15V 8.5A	DC-15V 7A	DC-15V 8.5A
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座				
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光				
Control Function 调控方式	Turning Knob 旋钮		Touch Screen 触屏 Mutual Control 互控		
Beam Angle 照射角度	68°		66°	68°	
CRI 显色度	95				
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	0.5M:650 1M:261 2M:181 (5600k)	0.5M:3720 1M:1280 2M: 378	0.5M:7070 1M:2500 2M:740 (5600K)	0.5M:8010 1M:2110 2M: 576 (5600k)	0.5M:11600 1M:3480 2M: 949 (5600k)
Footcandles 英尺烛光	0.5M:60 1M:24 2M: 17 (5600k)	0.5M:346 1M:119 2M: 35	0.5M:657 1M:232 2M:69 (5600K)	0.5M:744 1M:196 2M: 54 (5600k)	0.5M:1078 1M:323 2M:88 (5600k)
Mounting Method 安装配套	U-BRACKET U架	Supporting Rod 支撑杆: SPR-200B	U-BRACKET U架	U-BRACKET U架	U-BRACKET U架
Dimensions 机身尺寸	400×290×40mm	960×100×40mm	970x210x50mm	520×390×40mm	790×400×40mm
Weight 重量	1.89KG	3.21KG	5.34KG	4.3KG	7.25KG
In the box 配件	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 适配器DC-15V Control Box 控制盒 V-Mount battery plate V卡口电池座 Control Box Clip 控制盒夹: CL-25U	SPR-200B 支撑杆 Carry Bag 布袋 Adaptor DC-15V 适配器DC-15V Control Box 控制盒 V-Mount battery plate V卡口电池座	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 适配器DC-15V Control Box 控制盒 V-Mount battery plate V卡口电池座 Control Box Clip 控制盒夹: CL-25U	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 适配器DC-15V Control Box 控制盒 V-Mount battery plate V卡口电池座 Control Box Clip 控制盒夹: CL-25U	U-Bracket U架 Carry Bag 布袋 Adaptor DC-15V 适配器DC-15V Control Box 控制盒 V-Mount battery plate V卡口电池座 Control Box Clip 控制盒夹: CL-25U
Optional Accessories 选购配件	Light Stand 灯架: I-2001/B Li-ion Battery 锂电池: BP-100L WPC 3.1 Water Proof Case 抗压防水箱 BD挡光板 SP-XC04(4m)SP-XC06(6m) SP-XC08(8m)SP-XC10(10m) AD-PS1	Light Stand 灯架: I-2501 Li-ion Battery 锂电池: BP-100L (LPL-S2802T) BD挡光板 BG-10 HARD CASE 手提箱 SP-XC04(4m)SP-XC06(6m) SP-XC08(8m)SP-XC10(10m) AD-PS1 (LPL-S2802T)	Light Stand 灯架: I-2601/B Li-ion Battery 锂电池: BP-100L (LPL-S3602T/TD) Li-ion Battery 锂电池: BP-160 (LPL-S6002T/TD) BD挡光板 SP-XC04(4m)SP-XC06(6m) SP-XC08(8m)SP-XC10(10m) AD-PS1 (LPL-S3602T/TD)	Light Stand 灯架: I-2601/B Li-ion Battery 锂电池: BP-100L (LPL-S3602T/TD) Li-ion Battery 锂电池: BP-160 (LPL-S6002T/TD) BD挡光板 SP-XC04(4m)SP-XC06(6m) SP-XC08(8m)SP-XC10(10m) AD-PS1 (LPL-S3602T/TD)	Light Stand 灯架: I-2601/B Li-ion Battery 锂电池: BP-160




PATENT  
PRODUCT!

ROLL-FLEX-SERIES 布灯系列

RX-12T & RX-12TD、RX-18T & RX-18TD

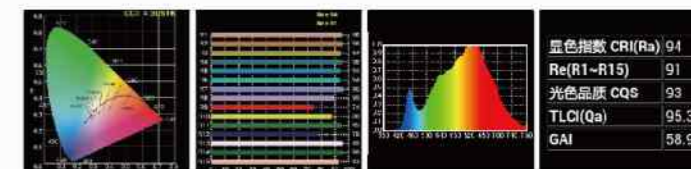

<b>RX-12T</b>	Distance距离	0.5m	1m	2m	
	LUX照度	3680	1230	351	
<b>RX-12TD</b>	Distance距离	0.5m	1m	2m	
	LUX照度	6400	1989	512	

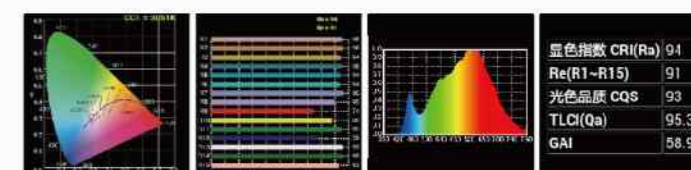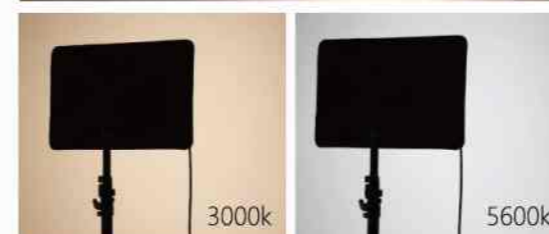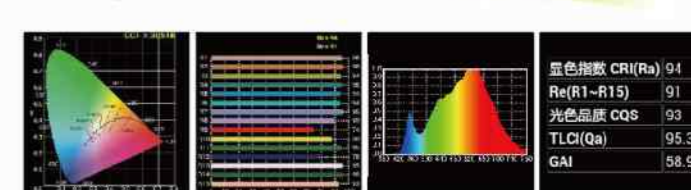

The new ROLL-FLEX LED light is developed with the latest LED technology to perform roll-able and flexible movement with a 10mm thickness of slim panel. The ROLL-FLEX comes in different models with different sizes, power output, and color setting to aim for all types of production works (RX-8T / 18W / daylight / 210x210mm; RX-12T / 34W / daylight / 460x320mm; RX-12TD / 50W / bi-color / 460x320mm; RX-18T / 62W / daylight / 610x460mm; RX-18TD / 100W / bi-color / 610x460mm).

All RX-TDX version is implanted with DMX feature, and remote control feature (with RC-3T): RX-29TDX / 100W / bi-color / 1210x240mm / DMX / Remote Control (RC-3T); RX-24TDX / 150W / bi-color / 625x625mm / DMX / Remote Control (RC-3T).

It is handy light weight and easy to carry around which is great to use as a LED reflector fill light. With the help of the bracket stand, you can mount the Roll-Flex on a light stand in order to use as a LED panel. The additional velcro accessories are included for multi-mounting purposes.

The external control box is connected to the flex light, with LCD touch screen control, desirable color and power setting can be adjusted easily. Share Your Move (mutual control) is also applied to the control box allowing an easy operation with multiple units. Lastly, all ROLL-FLEX models are compatible with both AC and DC power to suit for either on location work or studio production.

锐鹰新研发的ROLL-FLEX卷布LED灯采用了最新的薄片LED科技, 令只有10毫米厚的灯芯可以灵活地卷曲来调整灯的照射角度。

为了方便在拍摄及视频制作上做不同的效果, ROLL-FLEX提供了多款不同功率, 色温及尺寸型号给行家选择最适合自己的卷布灯 (RX-8T / 18W / 单色 / 210x210mm; RX-12T / 34W / 单色 / 460x320mm; RX-12TD / 50W / 双色 / 460x320mm; RX-18T / 62W / 单色 / 610x460mm; RX-18TD / 100W / 双色 / 610x460mm)。

所有RX-TDX版本植入了DMX系统, 和接收功能配合RC-3T遥控器使用: RX-29TDX / 100W / 双色 / 1210x240mm / DMX / 遥控功能 (RC-3T); RX-24TDX / 150W / 双色 / 625x625mm / DMX / 遥控功能 (RC-3T)

这款卷布LED灯轻巧方便携带, 配合旗板框架更可以当作反光板作补光灯使用。ROLL-FLEX配备了支架, 配置于灯架上使用即变成了一个轻巧的LED灯盘。随产品附送魔术贴配件方便于不同环境安装使用

卷布灯外置了触控控制盒, 令你可以更准确地调节色温及亮度输出, 制造出最理想的光源效果。控制盒加入了互控功能, 于使用多灯操作时更得心应手。配备了交流和直流能源驱动, 令对行户外及影室制作更加方便。

ROLL-FLEX LED PANEL  
布灯系列

F A L C O N E Y E S

SHARE YOUR MOVE 互控  
 TOUCH READY 触屏  
 COLORITE 高显色  
 ROLL-FLEX 可弯曲  
 PROTECT-TO-GO 防水  
 BORN IN THIN 超薄机身

显色指数 CRI(Ra)	94
Re(R1-R15)	91
光色品质 CQS	93
TLCI(Qa)	95.3
GAI	58.9

RX-18TD(504泡) 3000k-5600k

<b>RX-18T</b>	Distance距离	0.5m	1m	2m	
	LUX照度	6940	2470	668	
<b>RX-18TD</b>	Distance距离	0.5m	1m	2m	
	LUX照度	9920	3660	933	



RX-12OB / RX-18OB

RX-12SB / RX-18SB



RX-218T-BK | RX-18T x2 | RX-18OB x1 | BGE-12L x1  
 RX-18TD-BK | RX-18TD x1 | RX-18OB x1 | LMC-1900 x1 | BGE-10L x1

OPTIONAL ACCESSORIES 选购配件



Sony V Mount Battery 锂电池 (DC)  
 SP-XC04(4m)  
 SP-XC06(6m)  
 SP-XC08(8m)  
 SP-XC10(10m)  
 柔光箱  
 RX-12OB / RX-18OB  
 RX-12SB / RX-18SB  
 灯架  
 LMC-1900/B  
 CL-25U 夹子  
 TB-360  
 AD-PS1

3布灯套装 RX-318TDX-KR:



Velcro Connection 魔术贴连接

- 1、RX-18TDX (布灯部份) x3
- 2、CX-318TDX (控盒) x1
- 3、CR-0814 (折屏 80x140cm) x1
- 4、HC-CR0814 (专用蜂巢) x1
- 5、LSB-8+EC-36M x1
- 6、SP-AC24V-15 (适配器 24V/15A) x1
- 7、CC-02 x1
- 8、PCA-25M x1
- 9、RC-3T x1

RX-8T & RX-29TDX/RX-24TDX

COLORITE 高显色  
 BORN IN THIN 超薄机身  
 PROTECT-TO-GO 防水  
 ROLL-FLEX 可弯曲

显色指数 CRI(Ra)	94
Re(R1-R15)	91
光色品质 CQS	93
TLCI(Qa)	95.3
GAI	58.9

RX-8T



RX-29TDX



RX-29SBHC(蜂巢柔光箱)

RC-3T

RX-24TDX



RX-24SBHC(蜂巢柔光箱)

RC-3T



COLORITE  
高显色



TOUCH READY  
触屏



DMX-READY  
DMX操控



ROLL-FLEX  
可屈曲



PROTECT-TO-GO  
防水



BORN IN THIN  
超薄机身

RX-24TDX-K1



RX-24SBHC



BGE-11 套装包




RX-24SBHC

RC-3T遥控器

LMC-1900

RX-36TDX

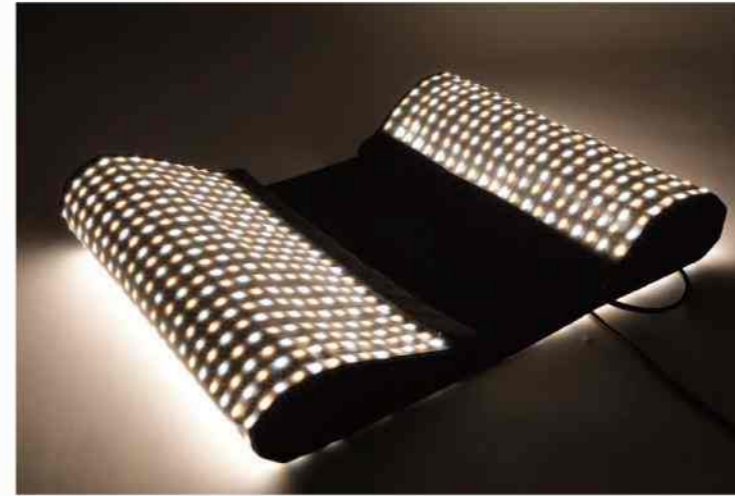

BGE-11 (96x20x12CM)



BGE-8L (80x22x14CM)



BGE-10L (100x22x14CM)







BGE-12L (120x22x14CM)

## PRODUCT SPECIFICATION 产品参数

Model No. 型号				
	RX-12T	RX-12TD	RX-18T	RX-18TD
LEDs LED灯泡数	280pcs	280pcs	504pcs	504pcs
Wattage 功率	34W	50W	62W	100W
Color Temperature 色温	3200K and 5600K Alternative 3200k或5600k二选一	3000K-5600K	3200K and 5600K Alternative 3200k或5600k二选一	3000K - 5600K
Operating Voltage 工作电压	DC-15V 5A			DC-15V 7A
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery 锂电池 (DC)			
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏	0-100% Step-less dimming 0-100% 无极调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏
Beam Angle 照射角度	10-360°			
Control Function 调控方式	Turning Knob 旋钮	Touch Screen 触屏	Turning Knob 旋钮	Touch Screen 触屏
CRI 显色度	95			
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	0.5M:3680 1M:1230 2M: 351	0.5M:6400 1M:1989 2M: 515	0.5M:6940 1M:2470 2M: 668	0.5M:9920 1M:3660 2M: 933
Footcandles 英尺烛光	0.5M:342 1M:114 2M: 33	0.5M:595 1M:185 2M: 48	0.5M:645 1M:230 2M:62	0.5M:922 1M:340 2M:87
Mounting Method 安装配套	X-Frame+CLD-14 X支架+万向接头			
Dimensions 机身尺寸	460×320mm		610×460mm	
Weight 重量	Light 布灯:0.3KG Control Box电源:0.49KG AC Adaptor 5A适配器:0.39KG		Light 布灯:0.5KG Control Box电源:0.49KG AC Adaptor 5A适配器:0.39KG	Light 布灯:0.5KG Control Box电源:1.05KG AC Adaptor 7A适配器:0.47KG
In the box 配件	AC Adaptor 适配器 DC-15V 5A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴		AC Adaptor 适配器 DC-15V 5A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴	AC Adaptor 适配器 DC-15V 7A X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴
Optional Accessories 选购配件	Spread Softbox 扩散柔光箱: RX-12OB Softbox 柔光箱: RX-12SB Light Stand 灯架: LMC-1900/B		Spread Softbox 扩散柔光箱: RX-18OB Softbox 柔光箱: RX-18SB Light Stand 灯架: LMC-1900/B	

## PRODUCT SPECIFICATION 产品参数

Model No. 型号				
	RX-8T	RX-29TDX	RX-24TDX	RX-36TDX
LEDs LED灯泡数	90pcs x 0.2W	504pcs x 0.5W	756pcs x 0.5W	1176pcs x 0.5W
Wattage 功率	18W	100W	150W	250W
Color Temperature 色温	3200K/5600K	3000K - 5600K		
Operating Voltage 工作电压	DC-9V 3A	DC-15V 7A	DC-15V 10A	DC-24V 15A
Compatibility 兼容性	AC Adaptor 适配器 Sony F Mount Battery 锂电池	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座		
Dimming 调光	0-100% Step-less Dimming 无极调光	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏		
Beam Angle 照射角度	65°	10-360°		
Control Function 调控方式	Turning Knob 旋钮	Touch Screen, Turning Knob, DMX, 2.4G remote (RC-3T) 触屏, 旋钮, DMX, 2.4G遥控器 (RC-3T)		
CRI 显色度	95			
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	0.5M:1660 1M:406 2M: 106	0.5M:7980 1M:2960 2M: 933	0.5M:11600 1M:3790 2M: 1060	0.5M : 15800 1M : 6040 2M : 1910
Footcandles 英尺烛光	0.5M:154 1M:38 2M:10	0.5M:742 1M:275 2M:87	0.5M:1078 1M:352 2M:99	0.5M : 1468 1M : 561 2M : 178
Mounting Method 安装配套	MPH-2B	X-Frame+CLD-14 X支架+万向接头		
Dimensions 机身尺寸	210×210mm	1210×240mm	625×625mm	1210×460mm
Weight 重量	0.4KG	Light 布灯:0.52KG Control Box电源:1.05KG AC Adaptor 7A适配器:0.47KG	Light 布灯:0.63KG Control Box电源:1.05KG AC Adaptor 10A适配器:0.91KG	Light 布灯:1.02KG Control Box电源:1.21KG AC Adaptor 15A适配器:1.41KG
In the box 配件	AC Adaptor 适配器 DC-9V 3A MPH-2B	Carry Bag 布袋 AC Adaptor 适配器 DC-15V X-Frame X支架+ CLD-14 Control Box 控制盒 Velcro Tape 魔术毛勾贴		
Optional Accessories 选购配件	Softbox 柔光箱RX-8SB Spread Softbox 扩散柔光箱 RX-8OB Sony F-mount Li-ion Battery 锂电池: NP-F550 Battery Charger 充电器:SP-CHG	Softbox 蜂巢柔光箱 RX-29SBHC Light Stand 灯架I-2601/B Li-ion Battery 锂电池BP-160 Battery Charger 充电器FC-B1 RC-3T遥控器	Softbox 蜂巢柔光箱RX-24SBHC Light Stand 灯架I-2601/B Li-ion Battery 锂电池BP-160 Battery Charger 充电器FC-B1 RC-3T遥控器 Spread Softbox 扩散柔光箱RX-24OB	Softbox 蜂巢柔光箱 RX-36SBHC Light Stand 灯架I-2601/B Li-ion Battery 锂电池BP-260VL Battery Charger 充电器FC-B2 RC-3T遥控器

# LED RING LIGHT SERIES

## LED环形灯系列

LED ring light series are able to create fascinating eyes light for portrait photography or video production. In a few years of development on LED ring light, Falcon Eyes has developed multi-functional LED ring lights to suit for different needs of filming.

DVR-512DVC / 32W ; DVR-160TVC / 32W / SMD LED ; DVR-384DVC / 23W ; DVR-112TVC / 23W / SMD LED.

New added Wi-Fi feature to remote control through mobile APP ( DVR-160TW / 32W / SMD LED / Wi-Fi Feature ) .

The new LED ring light is designed to generate better eyes light with the circular shape to enable a better fill lighting on an object. It is equipped with soft light diffuser which can lower the glare and allows the model to perform the best.

DVR-series ring light is compatible with both AC and DC (Sony F mount) power which is convenient for outdoor photography and video production.

锐鹰LED环型灯系列可以创造出迷人的眼神光，非常适合人像拍摄或影片制作。锐鹰LED环型灯系列在这数年间一阵发展出更多元化的功能，切合不同的制作需求。


DVR-512DVC / 32W ; DVR-160TVC / 32W / SMD LED ; DVR-384DVC / 23W ; DVR-112TVC / 23W / SMD LED.

新增Wi-Fi 功能，可下载锐鹰手机程式遥控色温及亮度(DVR-160TW / 32W / SMD LED / Wi-Fi Feature)。

最新研发的LED环型灯针对创造出更优美的眼神光及更好的补光而设计，LED环型灯配备了柔光面板，可以减低刺眼程度从而令你的模特儿可以更完美的发挥。所有DVR系列环型灯更配备了交流和直流(Sony F mount)能源驱动，令对户外制作更加方便。

PATENT PRODUCT!

## LED RING LIGHT SERIES/LED环形灯系列

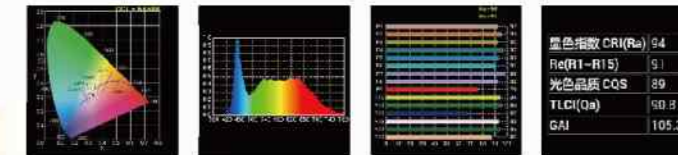

**DVR-512DVC**


DVR-512DVC  
Distance距离 0.5m 1m 2m  
LUX照度 1490 532 146



**DVR-160TVC**




**DVR-160TW**

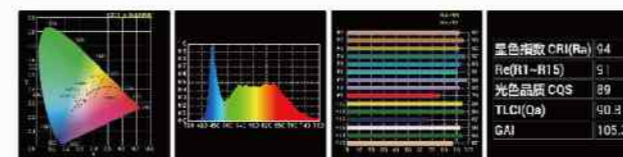

DVR-160TVC/TW  
Distance距离 0.5m 1m 2m  
LUX照度 1320 429 121

# LED RING LIGHT SERIES/LED环形灯系列

PATENT  
PRODUCT!

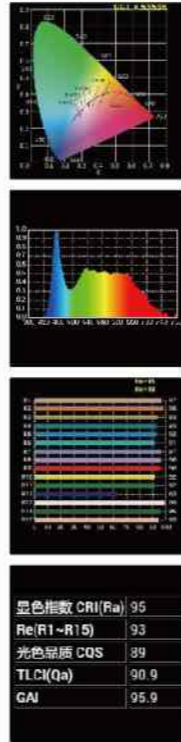

COLORITE  
高显色

显色指数 CRI(Ra)	95
Re(R1~R15)	93
光色品质 CQS	89
TLCI(Qa)	90.9
GAI	95.9

## DVR-112TVC & DVR-384DVC




### DVR-384DVC

Distance距离 0.5m 1m 2m  
LUX照度 1250 365 99

### DVR-112TVC

Distance距离 0.5m 1m 2m  
LUX照度 861 241 66.2

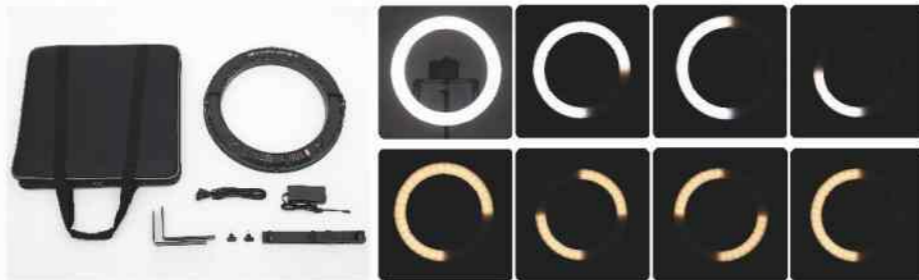

## OPTIONAL ACCESSORIES 选购配件



NP-F750F

NP-F960F

SP-CHG

Light Stand 灯架  
I-2501/B

Light Stand 灯架  
I-2601/B

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	DVR-512DVC	DVR-160TVC/TW	DVR-384DVC	DVR-112TVC
LEDs LED灯泡数	512pcs x 0.06W	160pcs x 0.2W	384pcs x 0.06W	112pcs x 0.2W
Wattage 功率	32W	32W	23W	23W
Color Temperature 色温	3000K-5600K	3000K-5600K	3000K-5600K	3000K-5600K
Operating Voltage 工作电压	DC-15V 3A	DC-15V 3A (VC) DC-15V 5A (TW)	DC-9V 3A	DC-9V 3A
Compatibility 兼容性	AC Adaptor 适配器 Sony F Mount Battery 锂电池 (x2)	AC Adaptor 适配器 Sony F Mount Battery 锂电池 (x2)	AC Adaptor 适配器 Sony F Mount Battery 锂电池	AC Adaptor 适配器 Sony F Mount Battery 锂电池
Dimming 调光	Quarter ON/OFF Switch 四段灯开关 0-100%Step-less dimming 0-100%无级调光 Color Dimming 3000K-5600K 色温调控 3000K-5600K	Quarter ON/OFF Switch 四段灯开关 (VC) 0-100%Step-less dimming 0-100%无级调光 Color Dimming 3000K-5600K 色温调控 3000K-5600K	Quarter ON/OFF Switch 四段灯开关 0-100%Step-less dimming 0-100%无级调光 Color Dimming 3000K-5600K 色温调控 3000K-5600K	Quarter ON/OFF Switch 四段灯开关 0-100%Step-less dimming 0-100%无级调光 Color Dimming 3000K-5600K 色温调控 3000K-5600K
Beam Angle 照射角度	60°	100°	60°	100°
Control Function 调控方式	Switch & Turning Knob 按键+旋钮	Turning Knob 旋钮 Switch 按键 (VC) WiFi Application 无线WiFi (TW)	Switch & Turning Knob 按键+旋钮	Switch & Turning Knob 按键+旋钮
CRI 显色度	95	95	95	95
Lux (0.5M / 1M / 2M) 照度 (0.5M / 1M / 2M)	0.5M:1490 1M:532 2M: 146	0.5M:1320 1M:429 2M: 121	0.5M:1250 1M:365 2M:99	0.5M:861 1M:241 2M:66.2
Footcandles 英尺烛光	0.5M:138 1M:49 2M: 14	0.5M:123 1M:40 2M: 11	0.5M:116 1M:34 2M: 9.2	0.5M:80 1M:22 2M: 6.2
Mounting Method 安装配套	Camera Bracket 相机托架	Camera Bracket 相机托架	L-Bracket L型相机托架	L-Bracket L型相机托架
Dimensions 机身尺寸	490×365×50mm	490×365×50mm	380×255×50mm	380×255×50mm
Weight 重量	1.5KG	1.5KG	0.9KG	0.9KG
In the box 配件	AC Adaptor 适配器15V/3A Camera Bracket 相机托架 BAG 布袋	AC Adaptor 适配器15V Camera Bracket 相机托架 BAG 布袋	AC Adaptor 适配器 9V/3A L-Bracket L型相机托架 BAG 布袋	AC Adaptor 适配器 9V/3A L-Bracket L型相机托架 BAG 布袋
Optional Accessories 选购配件	Sony F-mount Li-ion Battery 锂电池: NP-F750F/NP-F960F Light Stand 灯架: I-2501/I-2601 Battery Charger 充电器:SP-CHG	Sony F-mount Li-ion Battery 锂电池: NP-F750F/NP-F960F Light Stand 灯架: I-2501/I-2601 Battery Charger 充电器:SP-CHG RC-3T遥控器 (TW)	Sony F-mount Li-ion Battery 锂电池: NP-F750F/NP-F960F Light Stand 灯架: I-2501/B Battery Charger 充电器:SP-CHG	Sony F-mount Li-ion Battery 锂电池: NP-F750F/NP-F960F Light Stand 灯架: I-2501/B Battery Charger 充电器:SP-CHG



# ON CAMERA LED LIGHTS SERIES

## LED机顶灯系列

Falcon Eyes have been developed the on camera LED light for years and now it has reached a whole new level. The on camera LED lights series is mainly designed for micro filming and main camera fill light. All DV-models are designed to work under AC/DC power which enable the usage on different working environment. The varieties of accessories also allow users to apply the LED light with camera, light stand, handle, camera cages, etc.

The on camera LED light development was started from small power daylight models (DV-96V, DV-160V, etc), to higher power Bi-color models (DV-216VC, DV-384CT, etc) and now we are achieved to models with touch screen, mutual control system, thin housing and most important, the high CRI readings 95+. (DV-240SL, DV-300F2, DV-80SL/V)

There will be more exciting models joining in the future and it will make photo and video production work more enjoyable!

锐鹰一直在致力完善及发展LED机顶灯系列, 在这数年内已到达了一个崭新的领域。

LED机顶灯系列主要是针对微电影拍摄及相机持续补光灯而设。所有DV-型号都配备了AC或DC能源驱动, 令LED机顶灯能方便在不同的环境下使用。多元的辅助配件能令用家配合不同的摄影用具使用, 如相机热靴, 灯架, 手柄, 微电影相机架等等。

锐鹰的LED机顶灯发展始于稍低功率的日光LED灯型号开始(DV-96V, DV-160V, 等), 再发展到高功率双色LED灯型号(DV-216VC, DV-384CT, 等等)。现在锐鹰最新款的LED机顶灯已配备触屏, 互控, 超薄机身, 而最重要的, 就是显色指数的提高, 现已可达CRI 95+。(DV-240SL, DV-300F2, DV-80SL/V)

在将来锐鹰会为大家带来更多精彩的LED机顶灯, 令用家能在摄影及影片拍摄上有一个更好的享受。

F A L C O N E Y E S


PATENT PRODUCT!

## DV-80SL & DV-80V




**COLORITE**  
高显色

**BORN IN THIN**  
超薄机身



DV-80SL  
Distance距离 0.5m 1m  
LUX照度 1030 242

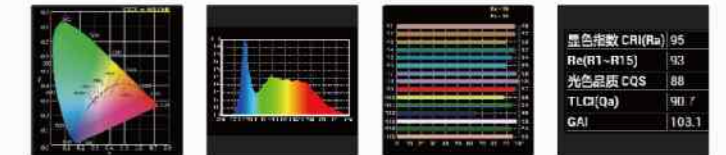

DV-80V  
Distance距离 0.5m 1m  
LUX照度 1200 298



DVK-280V / DVK-280SL

DVK-380V / DVK-380SL

### OPTIONAL ACCESSORIES 选购配件



12V / 2A

MP-155A

NP-F750F


SP-CHG

HS-B2

# DV-240SL & DV-300F2

PATENT  
PRODUCT!

## DV-240SL

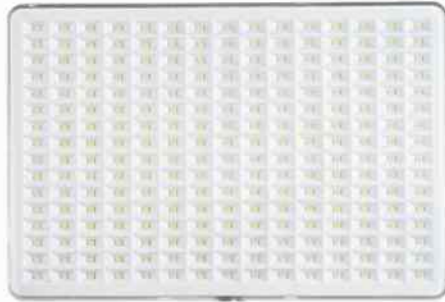


DV-240SL  
 Distance距离 0.5m 1m  
 LUX照度 1910 444

## DV-300F2



DV-300F2  
 Distance距离 0.5m 1m  
 LUX照度 7460 2180

AA battery capable

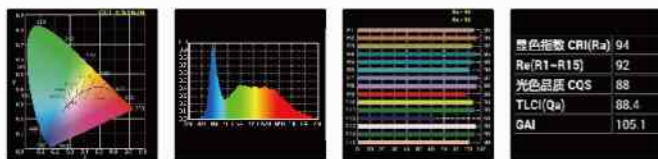

COLORITE  
高显色



SHARE YOUR MOVE  
互控



TOUCH READY  
触屏

## OPTIONAL ACCESSORIES 选购配件



9V / 3A



MP-155A



NP-F750F



SP-CHG



BG-DV384V

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	DV-80V	DV-80SL	DV-240SL	DV-300F2
LEDs LED灯泡数	80pcs x 0.2W	80pcs x 0.2W	240pcs x 0.06W	300pcs x 0.06W
Wattage 功率	15W	15W	14W	18W
Color Temperature 色温	5600K	3000K-5600K	3000K-8000K	3000K-8000K
Operating Voltage 工作电压	DC-12V/2A	DC-12V/2A	DC-9V/3A	DC-9V/3A
Compatibility 兼容性	AC Adaptor 适配器 Sony F Mount Battery 锂电池	AC Adaptor 适配器 Sony F Mount Battery 锂电池	AC Adaptor 适配器 Sony F Mount Battery 锂电池	AC Adaptor 适配器 Sony F Mount Battery 锂电池 AA Battery x 6pcs
Dimming 调光	0-100% Step-less Dimming 无极调光	0-100% Step-less Dimming 无极调光	0-100% Step-less Dimming 无极调光	0-100% Step-less Dimming 无极调光
Beam Angle 照射角度	100°	100°	100°	25°
Control Function 调控方式	Turning Knob 旋钮	Turning Knob 旋钮	Touch Screen 触屏 Mutual Control 互控	Touch Screen 触屏 Mutual control 互控
CRI 显色度	95	95	95	95
Lux (0.5M / 1M / 2M) 照度 (0.5M / 1M / 2M)	0.5M:1200 1M:298 2M:80	0.5M:1030 1M:242 2M: 65.5	0.5M:1910 1M:444 2M: 118	0.5M:7460 1M:2180 2M: 526
Footcandles 英尺烛光	0.5M:111 1M:28 2M: 7.4	0.5M:96 1M:23 2M: 6	0.5M:177 1M:41 2M: 11	0.5M:688 1M:203 2M: 49
Mounting Method 安装配套	1/4" Stud 1/4" 螺孔	1/4" Stud 1/4" 螺孔	1/4" Stud 1/4" 螺孔	1/4" Stud 1/4" 螺孔
Dimensions 机身尺寸	200x136x18mm	200x136x18mm	200x135x28mm	200x145x45mm
Weight 重量	0.2KG	0.2KG	0.35KG	0.4KG
In the box 配件	MHS-01 小型云台	MHS-01 小型云台		Filter 色片
Optional Accessories 选购配件	Ball Head Handle 球头手柄: MPH-155A+MPH-2 A/C Adaptor 适配器(12V/2A) F-Mount Battery 锂电池: NP-F750F Battery Charger 充电器: SP-CHG	Ball Head Handle 球头手柄: MPH-155A+MPH-2 A/C Adaptor 适配器(12V/2A) F-Mount Battery 锂电池: NP-F750F Battery Charger 充电器: SP-CHG	Ball Head Handle 球头手柄: MPH-155A+MPH-2 A/C Adaptor 适配器(9V/3A) F-Mount Battery 锂电池: NP-F750F Carrying Bag 提袋: BG-DV384V Battery Charger 充电器: SP-CHG	Ball Head Handle 球头手柄: MPH-155A+MPH-2 A/C Adaptor 适配器(9V/3A) F-Mount Battery 锂电池: NP-F750F Carrying Bag 提袋: BG-DV384V Battery Charger 充电器: SP-CHG

# FELUX LED FRESNEL SERIES

## 菲斯聚光灯

The Falcon Eyes CLL & DLL series LED Fresnel is designed for professional filming and broadcasting use. Equipped with high CRI LED chips, CLL & DLL series is able to reach CRI 95+ which can satisfy the standard requirement of filming and broadcasting.

CLL & DLL series is divided into different models with output from 160W to 750W while DLL series has 160W & 300W.

To enhance the usage of the CLL & DLL series in different environment, Falcon Eyes has divided the CLL & DLL series into Wifi control and DMX control. The Wifi control enable user to control multiple units with a smart device application under Wifi connection. It can make a fast and accurate setup and it free users from spending time to setup each single fixture. The design of CLL & DLL series also considered the need of silent environment. The cooling fan of each model can switch off and it'll remain 50% output. A temperature display will show the light temperature and if the temperature reach 75°C, the heat protection system will be activated. This will ensure the product life and the users' safety.

锐鹰CLL及DLL菲斯聚光灯是设计给专业电影视频制作摄影用。CLL及DLL菲斯聚光灯配备了高显色LED灯泡，显色指数达CRI95+。足够应付专业影视视频制作、摄影的基本需求。

CLL系列有多个型号，从最小160W到750W，而DLL系列则有160W及300W。

为了令CLL及DLL菲斯聚光灯能完美发挥其功能及应用，锐鹰把CLL及DLL菲斯聚光灯分成了两大类操控系统，WIFI控制系统和DMX控制系统。WIFI控制系统可以让用户透过WIFI及智能系统同时统制多台灯具。用户可以作出快捷及准确的调控，减少需要逐台调控的时间。CLL及DLL菲斯聚光灯在设计上亦同时考虑了静音环境的应用。散热风扇可以关上从而制造出静音环境。静音模式中灯具只能发挥50%功率。灯具机背设有温度显示，如果温度高达摄氏75度，为保障灯具寿命及用户安全，过热保护模式会自动启动。



PATENT  
PRODUCT!

CLL-1600TDX/TW/R/DR



CLL-1600TDX






CLL-1600TW



CLL-1600R/DR



3200K






显色指数 CRI(Ra)	97
Re(R1-R15)	95
光色温度 CQS	94
TLCI(Qa)	96.5
GAI	70.8





DMX-READY DMX操控 BEE DOT 蜂眼技术 TOUCH READY 触屏 WIFI-READY WIFI操控 COLORITE 高显色 QUIET-MODE 静音模式

5600K



显色指数 CRI(Ra)	96
Re(R1-R15)	93
光色温度 CQS	94
TLCI(Qa)	97.2
GAI	99.5

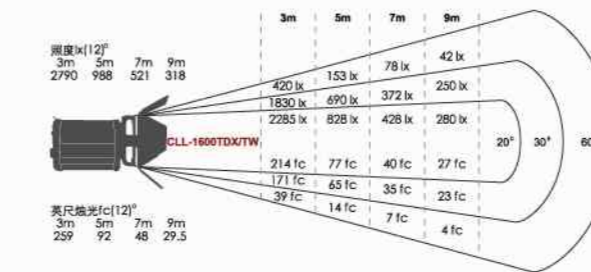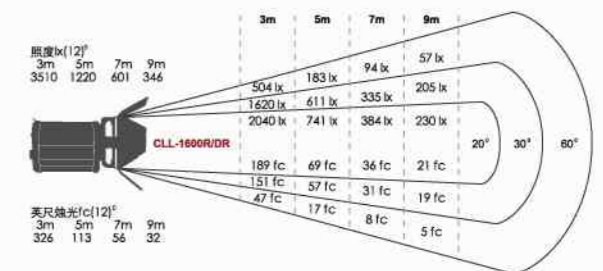

DMX-4M



YK-002A  
640Lx510Wx500H(mm)

CLL-2160K

CLL-1600TDX x 2套

2.6 金属灯架 x 2支

(Light Stand)

灯架专用包 x 1个

(Light Stand Bag)

五合一旗板 x 1套

(5-IN-1 Flag Panel)

五合一反光板 x 1套

(5-IN-1 Reflector)

YK-002A 铝制太空箱 x 1个

(Aluminum Case)



# CLL-3000TDX/TW/R/DR



PATENT  
PRODUCT!





CLL-3000TDX

CLL-3000TW

- DMX-READY DMX操控
- BEEDOT 蜂眼技术
- TOUCH READY 触屏
- WIFI-READY WIFI操控
- COLORITE 高显色
- QUIET-MODE 静音模式

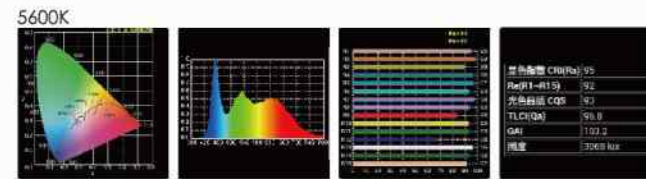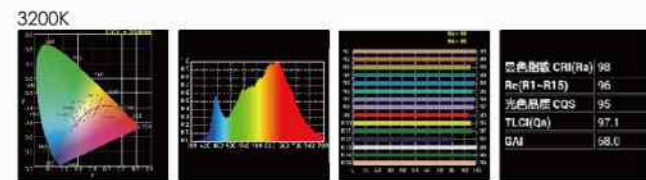

CLL-3000R/DR

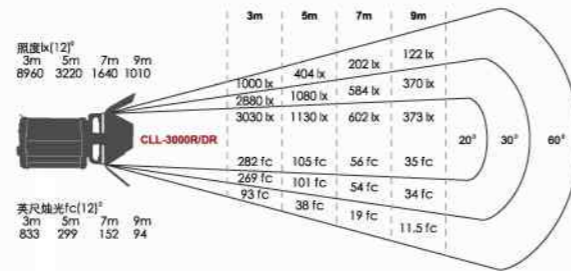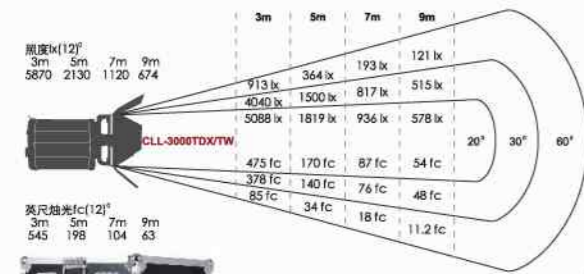

YK-004  
590Lx460Wx900H(mm)



YK-002A  
640Lx510Wx500H(mm)

DMX-4M



LM-2900HA/B



G-200

# PATENT PRODUCT! DLL-1600TDX/TW & DLL-3000TDX/TW





DLL-1600TDX

DLL-1600TW



DLL-3000TDX


DLL-3000TW

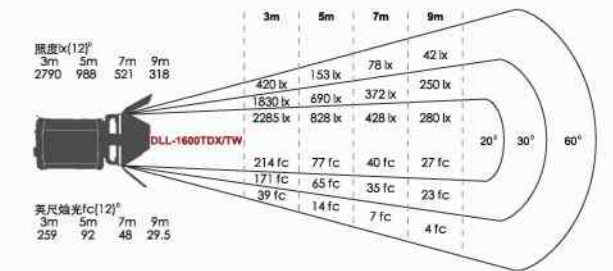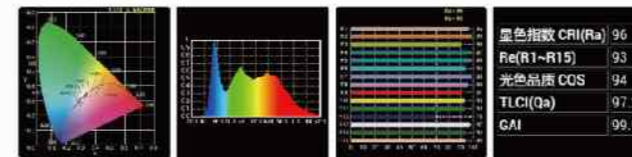

- DMX-READY DMX操控
- BEEDOT 蜂眼技术
- TOUCH READY 触屏
- COLORITE 高显色
- QUIET-MODE 静音模式



YK-002A  
640Lx510Wx500H(mm)

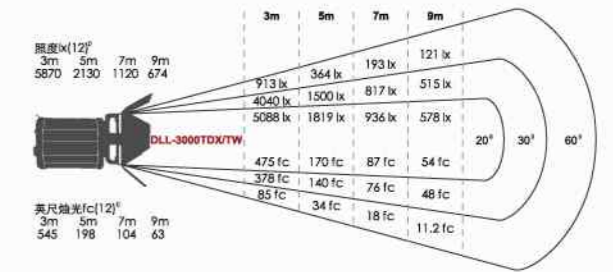



# CLL-4800TDX/TW/DR

PATENT  
PRODUCT!






CLL-4800TDX

CLL-4800TW

CLL-4800DR



- DMX-READY  
DMX操控
- BEE DOT  
蜂眼技术
- TOUCH READY  
触屏
- WIFI-READY  
WIFI操控
- COLORITE  
高显色
- QUIET-MODE  
静音模式

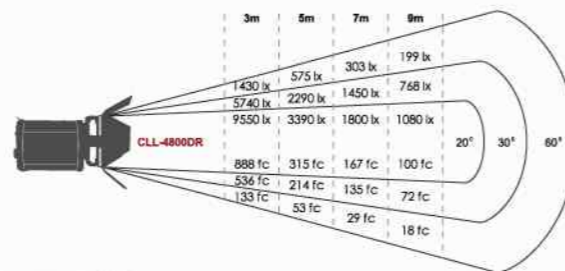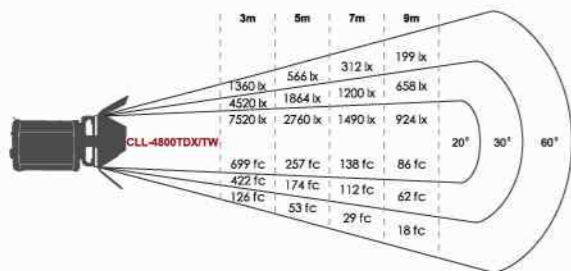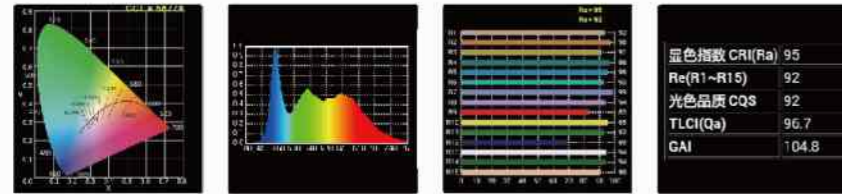

# CLL-7500TDX/TW/DR

PATENT  
PRODUCT!






CLL-7500TDX

CLL-7500TW

CLL-7500DR



- DMX-READY  
DMX操控
- BEE DOT  
蜂眼技术
- TOUCH READY  
触屏
- WIFI-READY  
WIFI操控
- COLORITE  
高显色
- QUIET-MODE  
静音模式

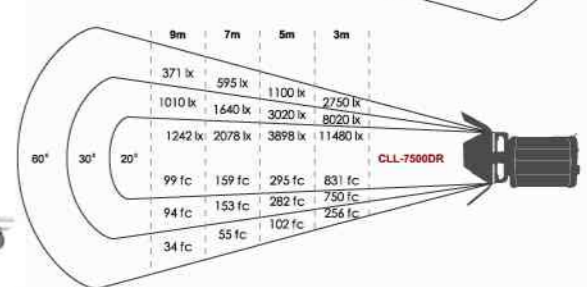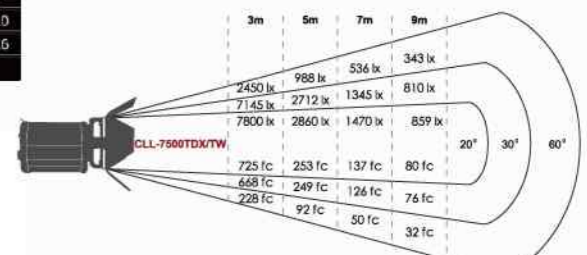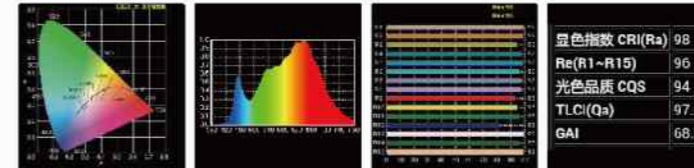

## PRODUCT SPECIFICATION 产品参数

Model No. 型号			CLL-1600R/DR	CLL-3000R/DR
	CLL-1600TDX/TW DLL-1600TDX/TW	CLL-3000TDX/TW DLL-3000TDX/TW		
LEDs LED灯泡数	1pcs x 160W	1pcs x 300W	1pcs x 160W	1pcs x 300W
Wattage功率	160W	300W	160W	300W
Color Temperature 色温	3000K-8000K		3000K and 5600K Alternative 3000k或5600k二选一	
Operating Voltage 工作电压	AC 110-240V 60 HZ/50HZ			
Compatibility兼容性	AC POWER 交流电(CLL系列) SP-AC15<13.3A> Adaptor 适配器 (DLL-1600系列) SP-AC15<20A> Adaptor 适配器 (DLL-3000系列)			
Dimming调光	0-100% Stepless Dimming 0-100% 无极调光			
Beam Angle照射角度	12°-60°			
Control Function 调控方式	Turning Knob 旋钮 Touch Screen 轻触屏 DMX-512(CLL-1600TDX / DLL-1600TDX) WiFi Application 无线WiFi (CLL-1600TW / DLL-1600TW) Over-Heat Protection 温度保护:75° Half Power Silent Mode: Fanless 半功率静音模式:无风扇	Turning Knob 旋钮 Touch Screen 轻触屏 DMX-512(CLL-3000TDX / DLL-3000TDX) WiFi Application 无线WiFi (CLL-3000TW / DLL-3000TW) Over-Heat Protection 温度保护:75° Half Power Silent Mode: Fanless 半功率静音模式:无风扇	Turning Knob 旋钮 DMX-512 Over-Heat Protection 温度保护:75° Half Power Silent Mode: Fanless 半功率静音模式:无风扇	Turning Knob 旋钮 DMX-512 Over-Heat Protection 温度保护:75° Half Power Silent Mode: Fanless 半功率静音模式:无风扇
CRI显色度	95			
Mounting Method 安装配套	U-Bracket U架			
Dimensions 机身尺寸	400x250x210mm	460x350x400mm	400x250x210mm	460x350x400mm
Weight 重量	4.79KG	9.8KG	4.79KG	9.8KG
Noise Level (dB) 噪音的分贝强度<100%> 噪音的分贝强度<50%>	0.2M:39dB 0.5M:35.5dB	0.2M:43.6dB 0.5M:39dB	0.2M:39dB 0.5M:35.5dB	0.2M:43.6dB 0.5M:39dB
In the box 配件	AC POWER CORD AC电源线 BARNDOR 挡光板 AC Adaptor 适配器(DLL-1600TDX/TW DLL-3000TDX/TW) V-mount battery plate V 型电池座 (DLL-1600TDX/TW DLL-3000TDX/TW)		AC POWER CORD AC电源线 BARNDOR 挡光板 Remote Controller RC-3E遥控器(R) Remote Controller RC-3T遥控器(DR)	
Optional Accessories 选购配件	LIGHT STAND 灯架: LM-2900GA/B *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH1000 + OB9* *Softbox + connector柔光箱及连接件 SR-SBQH1000 + SB6080* *WIFI USB RECEIVER WIFI USB接收器 (CLL/DLL-1600TW ONLY)* V Mount Battery 锂电池:BP-160L (DLL-1600TDX/TW) YK-002A	Large Light Stand 重型气垫灯架: LM-2900HA/B *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH2000 + OB12* *Softbox + connector柔光箱及连接件 SR-SBQH2000 + SB80120* *WIFI USB RECEIVER WIFI USB接收器 (CLL/DLL-3000TW ONLY)* Battery Box 电池箱: MPS-900PRO YK-002A	LIGHT STAND 灯架: LM-2900GA/B *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH1000 + OB9* *Softbox + connector柔光箱及连接件 SR-SBQH1000 + SB6080* YK-002A	Large Light Stand 重型气垫灯架: LM-2900HA/B *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH2000 + OB12* *Softbox + connector柔光箱及连接件 SR-SBQH2000 + SB80120* YK-002A

## PRODUCT SPECIFICATION 产品参数

Model No. 型号			CLL-4800DR	CLL-7500DR
	CLL-4800TDX/TW	CLL-7500TDX/TW		
LEDs LED灯泡数	1pcs x 480W	1pcs x 750W	1pcs x 480W	1pcs x 750W
Wattage功率	480W	750W	480W	750W
Color Temperature 色温	3000K-8000K		3000K and 5600K Alternative 3000k或5600k二选一	
Operating Voltage 工作电压	AC 110-240V 60 HZ/50HZ			
Compatibility兼容性	AC POWER 交流电			
Dimming调光	0-100% Stepless Dimming 0-100% 无极调光			
Beam Angle照射角度	20°-60°			
Control Function 调控方式	Turning Knob 旋钮 Touch Screen 轻触屏 DMX-512(CLL-4800/7500TDX) WiFi Application 无线WiFi(CLL-4800/7500TW) Over-Heat Protection 温度保护:75° 3-Steps cooling fan (0%, 55%, 100%) 三段散热风扇 (0%, 55%, 100%)		Turning Knob 旋钮 DMX-512 Over-Heat Protection 温度保护:75° 3-Steps cooling fan (0%, 55%, 100%) 三段散热风扇 (0%, 55%, 100%)	
CRI显色度	95			
Mounting Method 安装配套	U-Bracket U架			
Dimensions 机身尺寸	460x350x400mm	517x464x536mm	460x350x400mm	517x464x536mm
Weight 重量	10.12KG	17KG	10.12KG	17KG
Noise Level (dB) 噪音的分贝强度<100%> 噪音的分贝强度<50%>	0.2M:55.6dB 0.5M:50.6dB	0.2M:57dB 0.5M:52.6dB	0.2M:55.6dB 0.5M:50.6dB	0.2M:57dB 0.5M:52.6dB
In the box 配件	AC POWER CORD AC电源线 BARNDOR 挡光板		AC POWER CORD AC电源线 BARNDOR 挡光板 Remote Controller RC-3T遥控器	
Optional Accessories 选购配件	Large Light Stand 重型气垫灯架: LM-2900HA/B *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH2000 + OB12* *Softbox + connector柔光箱及连接件 SR-SBQH2000 + SB80120* *WIFI USB RECEIVER WIFI USB接收器 (CLL-4800TW ONLY)* YK-002A	Movable Metal Stand 移动重型灯架: TRS-3400HL Movable Metal Stand 移动重型灯架: TRS-2950 *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH5000 + OB15* *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH5000 + SB120120*	Large Light Stand 重型气垫灯架: LM-2900HA/B *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH2000 + OB12* *Softbox + connector柔光箱及连接件 SR-SBQH2000 + SB80120* YK-002A	Movable Metal Stand 移动重型灯架: TRS-3400HL Movable Metal Stand 移动重型灯架: TRS-2950 *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH5000 + OB15* *Octagon Softbox + connector 八角柔光箱及连接件 SR-SBQH5000 + SB120120*

# FILMING LED LIGHT LED灯管系列

Falcon Eyes' LP-Series LED filming light replace the traditional fluorescent light panel with lower heat emission, more effective in saving energy and brighter illumination. 3 tubes, 6 tubes and 9 tubes versions are available. LED tube are with power of 25W, 50000 hours life span, high CRI of 95Ra and color temperature of 3200K or 5600K. The aluminium housing is equipped with barn doors and our specially designed softbox can be installed to create soft light source. Each switch control 2 groups of LED light and U-bracket design makes it perfect in studio use.

锐鹰LP系列LED专业光管灯，设计有3管、6管、9管三种不同规格，每条灯管的功率为25W高色显LED，灯管LED寿命长达5万小时，色显指数Ra95，有两种色温灯管可供选择，分别是3200K或5600K，采用全铝合金灯壳，配有四叶挡光板，挡光板具有反光聚光功能，并标配了锐鹰独家设计的柔光箱，能使光线更加柔和，采用双开关设计，分两组控制灯管的开关，100V~240V全电压设计，360度翻转U型底座，能满足各种拍摄需求，发热低、耗电小、亮度高是LED光管灯的最大特点，特别适合于专业演播室、儿童摄影棚、广告宣传片、微电影、现场背景光等拍摄使用。

The new EBAR-E4 LED light panel is a ready-to-go set up that features accurate color rendition with high CRI of Ra 96, two-leaf barn door design for easy light angle control, and exchangeable LED lamp tubes (4 x 32W) with a total output of 128W. The back panel is built with the universal mount socket which makes it easy to mount on any on-location work.

全新的伊巴-E4 (EBAR-E4) 是一款简便的LED影视灯，它具有高CRI Ra 96提供准确的日光色温，双叶挡光板设计便于光角度控制，以及可更换式LED灯管 (4 x 32W) 总输出为128W。背面控制板配有通用安装插座，于任何场合进行拍摄时也能迅速地安装使用。



LP-253

LP-256

LP-259

EBAR-E4

PATENT  
PRODUCT!

## FILMING LED LIGHT / LED灯管系列



LP-253

Distance距离 0.5m 1m 2m  
LUX照度 6780 1880 491


LP-253



LP-256

Distance距离 0.5m 1m 2m  
LUX照度 12300 3480 938

LP-256

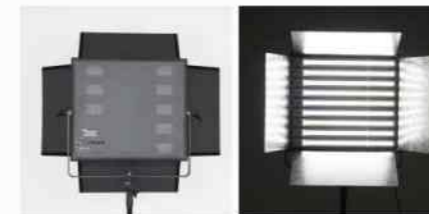


LP-259

Distance距离 0.5m 1m 2m  
LUX照度 18400 5380 1470

LP-259

### LET - 25 (110V or 230V)

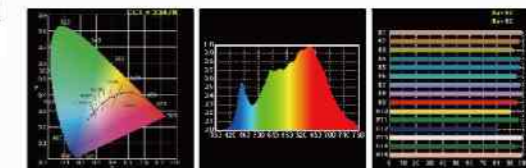

显色指数 CRI(Ra) 97  
Re(R1-R15) 95  
光色品质 CQS 95  
TLCI(Qa) 97.7  
GAI 68.5

# FILMING LED LIGHT / LED灯管系列

PATENT  
PRODUCT!

## 伊巴系列LED灯管灯

EBAR E-4 (伊巴 E-4) 4pcs x 32W



## LED光管 TL-32(32W)

TL-32

Distance距离 0.5m 1m 2m  
LUX照度 9180 3460 988



EBAR E-4 (伊巴 E-4)  
LED 光管 TL-32(32W) x 4

## IN THE BOX 配件



U-Bracket U架 Barn door 挡光板



LP-253BAG



LP-256BAG



LP-259BAG

## OPTIONAL ACCESSORIES 选购配件



Honeycomb蜂巢



TB-U2A



I-2601/B



LM-2900HA/B (LP-259)

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	LP-253	LP-256	LP-259	EBAR E-4
LEDs LED灯泡数	3pcs x LED-25W	6pcs x LED-25W	9pcs x LED-25W	4pcs x 32W
Wattage 功率	75W	150W	225W	128W
Color Temperature 色温	3200/5600K	3200/5600K	3200/5600K	5600K
Operating Voltage 工作电压	100-240V60 HZ/50HZ	100-240V60 HZ/50HZ	100-240V60 HZ/50HZ	AC 100-240V 60 HZ/50HZ
Compatibility 兼容性	AC POWER 交流电	AC POWER 交流电	AC POWER 交流电	AC POWER 交流电
Dimming 调光	N/A 无	N/A 无	N/A 无	N/A 无
Beam Angle 照射角度	100°	100°	100°	62°
Control Function 调控方式	ON/OFF 开关	ON/OFF 开关	ON/OFF 开关	ON/OFF 开关
CRI 显色度	95	95	95	96
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	0.5M:6780 1M:1880 2M: 491	0.5M:12300 1M:3480 2M: 938	0.5M:18400 1M:5380 2M: 1470	0.5M:9180 1M:3460 2M:988
Footcandles 英尺烛光	0.5M:630 1M:174.7 2M: 45.6	0.5M:1143 1M:323 2M: 87	0.5M:1710 1M:500 2M: 137	0.5M:853 1M:322 2M:92
Mounting Method 安装配套	U-Bracket U架	U-Bracket U架	U-Bracket U架	SPR-200B 支撑杆
Dimensions 机身尺寸	590x185x95mm	590x320x70mm	590x520x70mm	1310x360x80mm
Weight 重量	3.12KG	3.84KG	6.8KG	9.05KG
In the box 配件	Barn door 挡光板 U-Bracket U架 Carry Bag 布袋 Diffusor 柔光布	Barn door 挡光板 U-Bracket U架 Carry Bag 布袋 Diffusor 柔光布	Barn door 挡光板 U-Bracket U架 Carry Bag 布袋 Diffusor 柔光布	SPR-200B 支撑杆 Carry Bag 布袋 Barn door 挡光板
Optional Accessories 选购配件	Honeycomb蜂巢 Light Stand 灯架: I-2601/B TB-U2A	Honeycomb蜂巢 Light Stand 灯架: I-2601/B TB-U2A	TB-U2A Honeycomb蜂巢 Light Stand 重型灯架: LM-2900HA/B	Light Stand 灯架: I-2601/B

# CLASSIC LED PANEL LED平板灯系列

F A L C O N E Y E S

Falcon Eyes have been developed the classic LED panel for years, by listening to feedback from users and thanks to the hard work of our R&D team, the classic LED panel has developed to have more functions, pleasant using experience, and our best selling LED products at all time. All of our Classic LED panels are equipped with high CRI LED bulb which can achieve reading of CRI 95+. There are also different size, power and function for customer to choose. The design is also considered the available range of usage and all models are equipped with a SONY V-mount / Anton Bauer battery mount, which allow outdoor working.

锐鹰在发展LED平板灯上面已有非常丰富的经验,感谢客户一直以来的意见及开发部门的努力,现在锐鹰的LED平板灯已能提供更多功能,更好的使用体验给用家,更成为最畅销的LED产品系列。所有锐鹰的LED平板灯都采用了高显色LED灯泡,令显色指数可达CRI 95+。LED平板灯系列更有不同尺寸,功率及功能给客户挑选。LED平板灯系列的设计已一直有考虑减低使用的限制,都配备了索尼V-MOUNT或ANTON BAUER的电池座,令户外拍摄更轻松!

## The Daylight Version 日光灯版

Most of Falcon Eyes' LED panel has daylight version (5600K), with basic stepless dimming, the daylight version is the most basic equipment for photography and video production.

大部分的锐鹰LED平板灯型号都会有一款日光灯版(5600K),配合基本的无段调光,日光灯版能胜任所有基本拍摄/摄录要求。

## The Bi-Color Version 双色灯版

Most of Falcon Eyes' LED panel has Bi-Color version (3000K-8000K). The Bi-color version is equipped with digital touch screen display which allow users to adjust color temperature / intensity. The display enable a fast and accurate setting for users and which makes them always the best selling models.

大部份的锐鹰LED平板灯型号都会有双色灯版(3000-8000K)。双色灯版LED灯都配备了液晶显示触屏,让用家可以轻松调整色温及亮度。数码液晶显示屏更可以让用家能够作出准确和快速的设定,令双色灯版LED灯一直以来都是最畅销的LED灯。

## The DMX Version DMX控制系列

Some of the Falcon Eyes' LED panel are able to equip DMX control system. Customers can connect multiple panels in a studio and control with a DMX panel which is very suitable for broadcasting use. Both daylight and Bi-color version are able to equip DMX control system.

部份锐鹰LED平板灯型号可以加配DMX控制系统。日光灯版及双色灯版均可以装配DMX控制系统。用家可以连接多台装配了DMX控制系统的LED平板灯,配合DMX控制版控制多台LED平板灯,非常适合在广播室使用。

## The Wifi Version WIFI控制系列

Some of the Falcon Eyes' LED panel are able to equip Wifi control system. With the preset Wifi USB port and Wifi USB receiver, customers are able to control multiple LED panel with Falcon Eyes' mobile application. The application allow group control, fast input setting, memory setting, which can provide an extraordinary control experience to users.

部份锐鹰LED平板灯型号可以加配WIFI控制系统。只要在预设的WIFI USB插座上插入了WIFI USB接收器,用家便可以透过锐鹰的智能手机应用程序同时控制多台LED平板灯。应用程序更设有分组控制,直接输入,记忆系统等为用家提供一个超凡的使用体验。

## The Soft Light Version 柔光系列

Soft-Light has been well applied in many kinds of production filming, as well as photo portrait. The new LPW-100TD and LPW-150TD are built with latest technology and white diffuser plate in order to produce pure soft light, any objects under the LPW-TD Soft Version would look soft and natural without the help of additional light modifiers.



柔光效果已广泛地应用于各种视频及照片肖像拍摄。新的LPW-100TD / LPW-150TD采用了新技术及纯白色柔光板,令产生出来的光线非常柔和,不需要配合其他柔光配件已可达到柔光效果。

PATENT  
PRODUCT!


## CLASSIC LED PANEL / LED平板灯系列




LPW-600TD 小泡 LED 0.06W/pcs

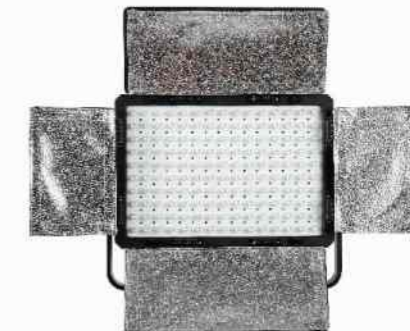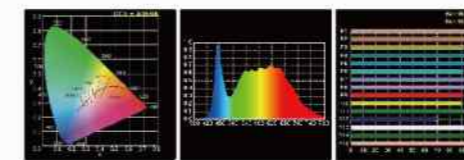


LPW-1505TD 大泡 LED 0.5W/pcs

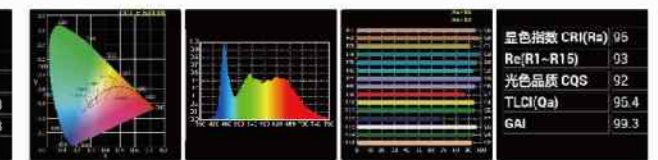

LPW-820TD 小泡 LED 0.06W/pcs

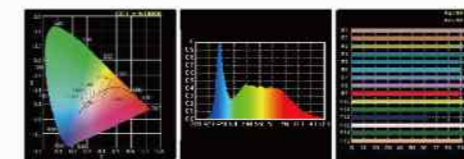

LPW-2005TD 大泡 LED 0.5W/pcs

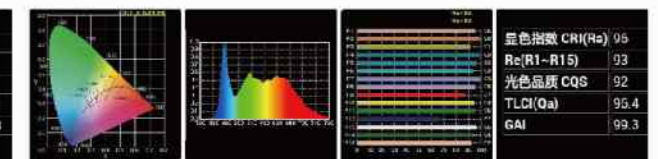

3000K/5600K/8000K

## OPTIONAL ACCESSORIES 选购配件



WIFI USB RECEIVER  
WIFI USB接收器



SD-PSI  
(LPW-600TD)



BP-100L  
(LPW-600/820TD)



BP-160  
(LPW-1505/2005TD)



CC-30



Light Stand  
灯架 I-2501/B



YK-002A



YK-003

# CLASSIC LED PANEL/ LED平板灯系列

PATENT  
PRODUCT!



LPW-1200TD 小泡 LED 0.06W/pcs



LPW-3005TD 大泡 LED 0.5W/pcs



LPW-100TD



LPW-150TD



## OPTIONAL ACCESSORIES 选购配件



WIFI USB RECEIVER  
WIFI USB接收器

BP-100L

BP-160  
(LPW-100TD/150TD)

YK-002A

YK-003

Light Stand  
灯架 I-2501/B

Light Stand  
灯架 I-2601/B

## PRODUCT SPECIFICATION 产品参数

Model No. 型号				
LEDs LED灯泡数	600pcs x 0.06W	150pcs x 0.5W	820pcs x 0.06W	200pcs x 0.5W
Wattage 功率	36W	75W	49.2W	100W
Color Temperature 色温	3000K-8000K			
Operating Voltage 工作电压	DC-15V 5A	DC-15V 7A		
Compatibility 兼容性	AC Adaptor适配器 Sony V Mount Battery (DC) V卡口电池座			
Dimming 调光	0-100% Step-less dimming 0-100%无极调光 Color Temperature色温 3000K-8000K(TD Version Only)			
Beam Angle 照射角度	45°			
Control Function 调控方式	Turning Knob 旋钮 Touch Screen 触屏 WiFi Application 无线WiFi			
CRI 显色度	95			
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	0.5M:9950 1M:2900 2M: 735	0.5M:20200 1M:5380 2M: 1330	0.5M:13600 1M:3740 2M: 958	0.5M:34800 1M:12700 2M: 3200
Footcandles 英尺烛光	0.5M:925 1M:270 2M: 68	0.5M:1877 1M:500 2M: 124	0.5M:1264 1M:348 2M: 89	0.5M:3234 1M:1180 2M: 297
Mounting Method 安装配套	U-Bracket U架			
Dimensions 机身尺寸	340×235×62mm	340×235×62mm	450×240×62mm	450×240×62mm
Weight 重量	1.8KG	2.2KG	2.4KG	3.1KG
In the box 配件	AC Adaptor 适配器DC-15V U-Bracket U架 Carry Bag 布袋 Reflector 反光布 Filter(Transparent&Orange)色片			
Optional Accessories 选购配件	V Mount Battery 锂电池:BP-100L Light Stand: I-2501 WIFI USB RECEIVER WIFI USB接收器 CC-30	V Mount Battery 锂电池:BP-160 Light Stand: I-2501 WIFI USB RECEIVER WIFI USB接收器 CC-30	V Mount Battery 锂电池:BP-100L Light Stand: I-2501 WIFI USB RECEIVER WIFI USB接收器 YK-002A/YK-003	V Mount Battery 锂电池:BP-160 Light Stand: I-2501 WIFI USB RECEIVER WIFI USB接收器 YK-002A/YK-003

## PRODUCT SPECIFICATION 产品参数

Model No. 型号				
	LPW-1200TD	LPW-3005TD	LPW-100TD	LPW-150TD
LEDs LED灯泡数	1200pcs x 0.06W	300pcs x 0.5W	504pcs x 0.5W	600pcs x 0.5W
Wattage 功率	72W	150W	100W	150W
Color Temperature 色温	3000K-8000K		3000K-5600K	
Operating Voltage 工作电压	DC-15V 7A	DC-15V 10A	DC-15V 7A	DC-15V10A
Compatibility 兼容性	AC Adaptor适配器 Sony V Mount Battery (DC) V卡口电池座			
Dimming 调光	0-100% Step-less dimming 0-100%无极调光 Color Temperature色温 3000K-8000K(TD Version Only)		0-100% Step-less dimming 0-100%无极调光 Color Temperature色温 3000K-5600K(TD Version Only)	
Beam Angle 照射角度	45°		62°	
Control Function 调控方式	Turning Knob 旋钮 Touch Screen 触屏 WiFi Application 无线WiFi DMX-512 (LPW-150TD)			
CRI 显色度	95			
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	0.5M:19200 1M:5590 2M: 1480	0.5M:35800 1M:13000 2M: 3470	0.5M:9790 1M:2350 2M: 615	0.5M:16000 1M:4130 2M: 1010
Footcandles 英尺烛光	0.5M:1784 1M:520 2M: 138	0.5M:3327 1M:1208 2M: 322.5	0.5M:910 1M:218 2M: 57	0.5M:1487 1M:384 2M: 94
Mounting Method 安装配套	U-Bracket U架			
Dimensions 机身尺寸	450x340x80mm	455x340x62mm	455x240x101mm	455x340x101mm
Weight 重量	3.3KG	3.2KG	3.6KG	3.8KG
Noise Level (dB) 噪音的分贝强度	-		0.2M:36.7dB 0.5M:34.7dB	0.2M:35dB 0.5M:34dB
In the box 配件	AC Adaptor 适配器DC-15V U-Bracket U架 Carry Bag 布袋 Reflector 反光布 Filter(Transparent&Orange)色片		U-Bracket U架 Carry Bag 布袋 Reflector 反光布	AC Adaptor 适配器DC-15V U-Bracket U架 Carry Bag 布袋 Reflector 反光布
Optional Accessories 选购配件	V Mount Battery 锂电池:BP-160 Light Stand: I-2501/I-2601 WIFI USB RECEIVER WIFI USB接收器 YK-002A/YK-003		V Mount Battery 锂电池:BP-160 Light Stand: I-2501 WIFI USB RECEIVER WIFI USB接收器 (LPW Only 仅限LPW型号)	



# SABER-SERIES

PATENT  
PRODUCT!

## 莎贝尔 棒灯系列

The Falcon Eyes SABER series is a handheld LED light stick. It is perfect to use as a close fill light.

SABER ONE & SABER TWO are the most popular model as it has equipped a mutual control technology. It is designed with A, B, C three groups control channels in order to adjust multiple lights simultaneously or in groups, with dimmable output.

In order to make them more users friendly, we have designed with 4 often used color temperatures 3200/5000/5600/8000K as quick selection to convenient the outdoor photography. The main different between SABER ONE & SABER TWO is SABER ONE has built-in battery which is rechargeable. SABER TWO has F-mount battery plate attached at the back and able to work with SONY F-mount battery. There are also optional accessories which enable a more creative light effect which is waiting to be discovered.

SABER THREE is a complete different model from SABER ONE & TWO. It is a 3-in-1 LED stick light which gives you a lightweight Lumen in LED sticks and LED ring light, as well as a portable battery pack of 4600mAh.

The SABER 3 is designed to be light on housing with rotatable filter which enable a color temperature of 3200K or 5600K. The interesting feature about the SABER THREE battery handle is that it can also work with the DVR-112V ring light. It can also work as a portable battery pack for charging your phone or camera accessories.

锐鹰莎贝尔系列是手持互控式LED棒灯，非常适合人物摄影摄像补光使用。

SABER 1及SABER 2是我们最普及的两款互控型号。设有A,B,C三个组别控置，可多灯调控或分组调节。每个色温值均可无极调光，并设计成四档常用色温 3200/5000/5600/8000K，大大方便外拍效率。SABER 1及2的最大分别是SABER 1是内置可充电锂电池，而SABER 2则是配备了SONY F MOUNT电池座，可以更换电池使用。SABER 1及SABER 2都设有多款选购配件令用户可以发掘更多未知的效果。

SABER 3跟SABER 1及2比较是一款完全不同的产品。SABER 3是一个三合一的LED棒灯，功率比SABER 1及2稍稍低一点，但同时配备了小LED环型灯及4600mAh电池手柄。

SABER 3采用了轻量设计，配以圆筒型可旋转外壳，可以透过有色机壳把色温控制在3200K或5600K。SABER 3有趣的地方是它还配备了一个小LED环型灯，可以使用电池手柄使用。而电池手柄更可化身充电宝为你的电话及相机配件充电。





SA1

SA2

SA3

# SABER-SERIES/ 莎贝尔棒灯系列

PATENT  
PRODUCT!

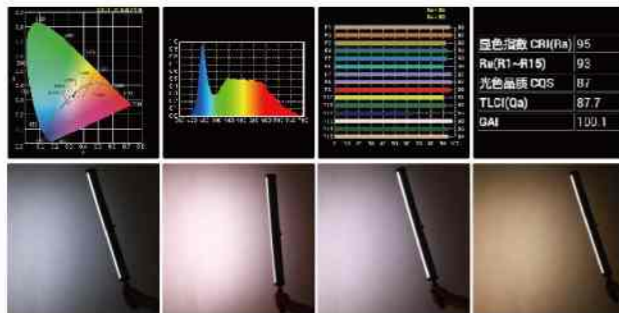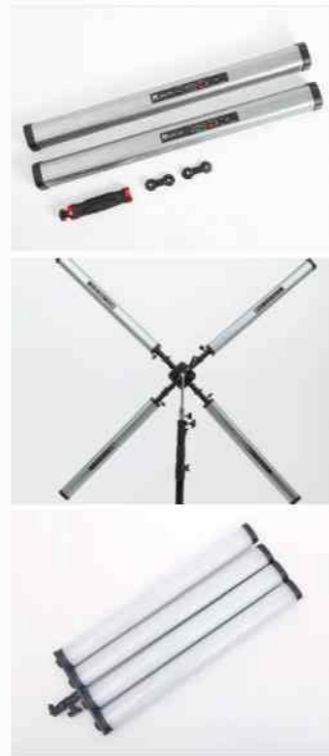

## OPTIONAL ACCESSORIES 选购配件



SA1-BD


SPR-200B-4

SA1-S4

SA1-U

# SABER-SERIES/ 莎贝尔棒灯系列

PATENT  
PRODUCT!

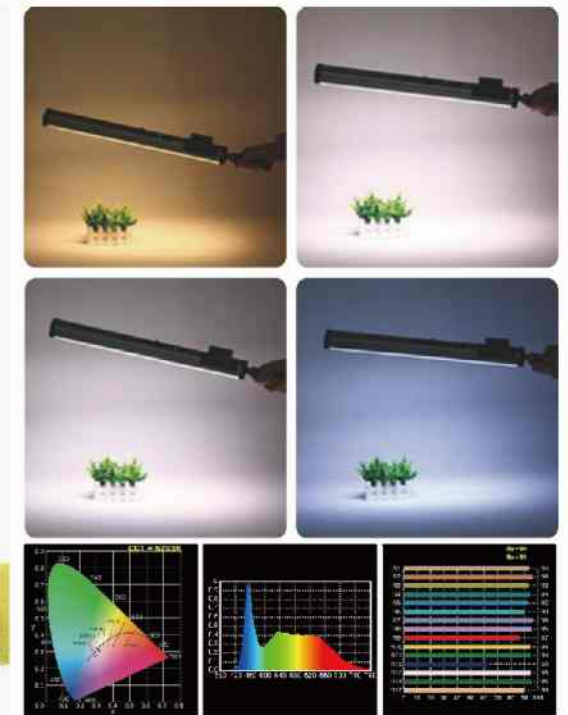

## SA2-K1

- 1 x SA2 • 1 x NP-F750 ( with charger )
- 1 x SA2-BAG • 1 x MP-155A
- 1 x AC Adaptor (9V 3A)



## OPTIONAL ACCESSORIES 选购配件



SA2-U

SA2-BD

SPR-200B-4

SA1-S4



# SABER-SERIES/ 莎贝尔棒灯系列

PATENT  
PRODUCT!



SABER3+SA3-B



DVR-112V+SA3-B




SA3-1



DVR-112V + SA3-B



SA3-B

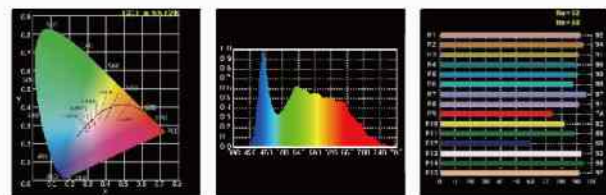

SABER3 + SA3-B

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	SABER 1(SA1)	SABER 2(SA2)	SA3+SA3-B	DVR-112V+SA3-B
LEDs LED灯泡数	360pcs x 0.06W	288pcs x 0.06W	88pcs x 0.2W	112pcs x 0.2W
Wattage 功率	22W	17W	15W	15W
Color Temperature 色温	3200K/5000K/5600K/8000K	3200K/5000K/5600K/8000K	3200K/5600K	5600K
Operating Voltage 工作电压	DC12V/2.6A	DC-9V 3A	DC7.4V,4600mAh	DC7.4V,4600mAh
Compatibility 兼容性	AC Adaptor 适配器	AC Adaptor 适配器 Sony F Mount Battery 锂电池	AC Adaptor 适配器	AC Adaptor 适配器
Dimming 调光	0-100% Step-less dimming 0-100%无级调光	0-100% Step-less dimming 0-100%无级调光	0-100% Step-less dimming 0-100%无级调光	0-100% Step-less dimming 0-100%无级调光
Beam Angle 照射角度	45°	45°	100°	100°
Control Function 调控方式	Switch+Turning Knob+Mutual Control 按键+旋钮+互控	Switch+Turning Knob+Mutual Control 按键+旋钮+互控	Turning Knob 旋钮	Turning Knob 旋钮
CRI 显色度	95	95	95	95
Lux (0.5M / 1M / 2M) 照度(0.5M / 1M / 2M)	0.5M:4180 1M:1300 2M: 342	0.5M:2120 1M:623 2M: 180	0.5M:1500 1M:409 2M: 113	0.5M:1330 1M:388 2M: 99.9
Footcandles 英尺烛光	0.5M:388 1M:131 2M: 32	0.5M:197 1M:58 2M: 17	0.5M:139 1M:38 2M: 11	0.5M:124 1M:36 2M: 9.2
Mounting Method 安装配套	Grid Handle 手柄	Grid Handle 手柄	Battery Handle 电池手柄	Battery Handle 电池手柄
Dimensions 机身尺寸	605×60×60mm	505×60×60mm	Φ62×570mm <配手柄 W/ Handle>	Φ160×26mm
Weight 重量	1KG	0.66KG	0.6KG (With Power Supply)	0.17kg(Without Power Supply) 0.52KG(With Power Supply)
In the box 配件	Carry Bag 布袋 AC adaptor 适配器 SP-AC12V/2.6A Grid Handle 手柄 Connector连接器	Carry Bag 布袋 Grid Handle 手柄 Connector连接器 AC Adaptor(9V 3A) 适配器	USB Cable USB线 Connector Ring 接环 TMB-20B Camera Bracket	Charger 充电器 Battery Handle 电池手柄 Kit Bag 套装袋 Hotshoe Holder 热靴座 MHS-01
Optional Accessories 选购配件	Cross Bracket 四灯拼接架: SPR-200B4 Barn door挡光板: SA1-BD U Bracket U架:SA1-U T Bracket T架:SA1-S4	Charger 充电器 & Battery 充电电池(SA2-K1) Barn door挡光板: SA2-BD Sony F-mount Li-ion Battery 锂电池: NP-F750F/NP-F960F Cross Bracket 四灯拼接架: SPR-200B4 U Bracket U架:SA2-U T Bracket T架:SA1-S4		



PATENT PRODUCT!  
专利产品!

# BL-6T/6TD

## 电池LED摄影摄像灯

- Touch Screen 触屏
- Mutual Control 互控
- High CRI 高色显



Li-ion Battery 锂电池  
BL-6BP

Application for LED is now more popular and it is difficult to carry various accessories and batteries moving around. BL-6T (single color) & BL-6TD (Bi-color) are new battery LED introduced by Falcon Eyes this year, the BL-6T and BL-6TD are design to contain the battery inside the housing so the light is powered as it original look.

BL-6T & BL-6TD also support AC adapter so there are more options in different environment use.

BL-6T is single color version (3000K or 5600K) and BL-6TD is bi-color version from 3000K-8000K. Both versions are equipped with "Share your move" function which you can group multiple fixtures under groups and control the group with one of the fixtures.

The battery is removable for recharge, or act as a power bank for your smart phone as well. The battery can operate the light for 40 mins in full output.

现在在应用LED拍摄方面渐趋多元化, 令携带配件及移动电源变得愈来愈占空间及重量。有见及此, 锐鹰公司研发推出BL-6T及BL-6TD电池LED灯, 可移除的电池已配备在LED灯内, 令你不需要在灯以外还要接上额外的电源。BL-6T及BL-6TD同时可支援AC电源适配器, 令你在不同的拍摄环境有更多的供电选择。

BL-6T是单色温型号(3000K 或5600K) 而BL-6TD 是双色温型号 (3000-8000K)。两款型号都配备了互控功能, 令你可以在使用多台灯的时间把需要的灯具组合在一起, 只需要控制一台灯就可以控制整组灯具。

灯内的电池可以拆下充电, 或变为充电宝为小型电器充电使用。电池充满后可以以BL-6T及BL-6TD的全功率运行约40分钟。



抛物线形LED摄影摄像灯柔光罩PSB-9(直径90cm)  
Parabolic Softbox PSB-9 (dia. 90cm)



LED 专业摄像灯  
LED VIDEO-LIGHT

400W

# 锐鹰天灯 优仕U4

FALCONEYES UO-SERIES U4 SKY LIGHT

PATENT PRODUCT!  
专利产品!

锐鹰新研制的 优仕U4天灯能于高处提供双色柔光光源, 配合灯架横杆使用时, 即变身成便携式天花柔光灯。U4可通过DMX控制调整色温和亮度, 及2.4GHz远程操控来调整灯光设置(配合RC-3T遥控器使用), 使其能满足不同场景的拍摄需求。

配合现时新的LED技术, U4已成功达到总输出400W以及高显色指数(CRI 98)的高品质光源。其独特设计的圆柱形柔光罩及柔光箱能有效地做出优美的柔光效果, 令你能轻松地制作出专业视频。

The FalconEyes UO-series U4 Sky Light is designed to provide bi-color softlight from up above the ground level, performing like a portable ceiling soft light when using with light boom. The U4 is developed with built-in DMX feature for easy adjustment on the color and light setting, while 2.4GHz remote control (RC-3T controller) is also available to meet different shooting requirements.

As from the latest LED technology, U4 has achieved a maximum 400W power output and a high CRI of Ra 98 professional level lighting, with the help of the cylindrical shaped diffuser and softbox, producing professional footage is now easier than ever.



背面



正面

无线遥控(RC-3T)



灯+黑色罩

灯+柔光罩

3000K

5850K

8000K

## PRODUCT SPECIFICATION 产品参数

Model No. 型号	BL-6T	BL-6TD	U4
LEDs & Power LED灯泡数及功率	1pcs x60W		400pcs (100pcs x 4)
Out put Wattage 输出功率	60W		400W (100W x 4)
Color Temperature 色温	3000/5600K	3000K- 8000K	
Operating Voltage 工作电压	DC-15V 5A		AC-110-240V 60HZ/50HZ
Compatibility 兼容性	AC Adaptor 适配器 内置可装锂电池14.8V/3000MAH/充电器16.8/1.5A		
Dimming 调光	0-100% Step-less dimming 0-100% 无极调光	0-100% Step-less dimming 0-100% 无极调光 Color Dimming 3000K-8000K 色温调控 3000K-8000K	
Beam Angle 照射角度	32°		72°、35° (+diffusor布罩)
Control Function 调控方式	ON/OFF开关 Touch Screen 触屏 Mutual Control 互控		Turning Knob / DMX / Touch Screen / 2.4G remote(RC-3T) 旋钮 / DMX / 触屏 / 遥控 RC-3T
CRI 显色度	95		98
Lux 照度	0.5M:26700 1M:4540 2M:927 3M:419	0.5M:20500 1M:3520 2M:736 3M:338	1M: 6390 2M: 1580 3M: 710 5M: 285 7M: 154
Footcandles 英尺烛光	0.5M:2481 1M:422 2M:86 3M:39	0.5M:1905 1M:327 2M:68 3M:31	1M: 594 2M: 147 3M: 66 5M: 26 7M: 14
Mounting Method 安装配套	Handle 手柄MP-155B		Wire rope 钢丝绳
Dimensions 机身尺寸	258x 159mm	258x159mm	60(dia.直径)x20cm 60x90cm(diffusor布罩)
Weight 重量	1.88kg		15kg
Noise Level(dB) 噪音的分贝强度	0.2M:43dB / 0.5M:37dB	0.2M:43dB 0.5M:37dB	/
In the box 配件	DC-15V 5A适配器 内置可装锂电池14.8V/3000MAH/充电器16.8/1.5A Handle 手柄MP-155B/Bags摄影包 Reflector标准罩SR-18		cylindrical diffusor 圆柱形柔光罩 cylindrical softbox 圆柱形柔光箱
Optional Accessories 选购配件	Parabolic Softbox PSB-9 (dia. 90cm) 抛物线形LED摄影摄像灯柔光罩PSB-9(直径90cm) Light Stand 灯架: I-2501/I-2601		LSB-8 Light Boom 灯架 U-Bracket U-架



## LED 脉冲星 PULSAR 小型聚光灯 P5A / P5AD / P8A

锐鹰最新款的脉冲星系列是一个可以配合不同的配件制造出不同效果的小型LED聚光灯。

在这一年锐鹰开发出两款新型号P5AD (50W, 双色温)及P8A (80W) 加入脉冲星系列。脉冲星系列配备了高水准LED灯珠, 令显色度达97而TLCI更高达98。聚光及泛光角度可以在12°-60°之间调效。灯的前端配有转接器, 可以配合脉冲星配件套装PA-K6, 从而创造出不同的光效。P5A机体采用了CNC拉铝, 机体非常轻巧而且耐用, 方便携带到户外使用。P8A机体配备了静音散热风扇, 在高输出时表现更稳定。

脉冲星系列都配备了触屏控制盒, 令你可以更准确地调节输出, 调出理想的光源。脉冲星系列更加入了互控功能, 令你使用多灯操作时更得心应手。

P5A及P8A单色温型号提供3000K(黄光)或5600K(日光)两款, 而双色温型号P5AD则可从3000K调至5600K。

Falcon Eyes new PULSAR series is a small LED Fresnel which is able to create different effects with different accessories.


In this year two new models will be introducing into PULSAR series, P5AD (50W bi-color) and P8A (80W). PULSAR series are equipped with high quality LED chip which can reach a CRI of 97 and TLCI of 98. The beam angle can adjust from 12°-60°. The front adaptor is able to adapt to PA-K6 accessories like snoot, honeycomb, color gel, softbox, etc to create different effects. The housing of P5A is CNC aluminum housing which is very durable and light on weight. Which is fit for outdoor operation. P8A is equipped with a silent cooling fan which can provide a noise free environment.

A delicate control box is attached with LCD touch screen control. Desirable light can be adjusted easily. They've also designed to have the mutual control system (Share your move function) allowing an easy operation for multiple units.

Single color version can chose color between 3000K or 5600K alternative, and Bi-color version will be from 3000K-5600K.



P5A

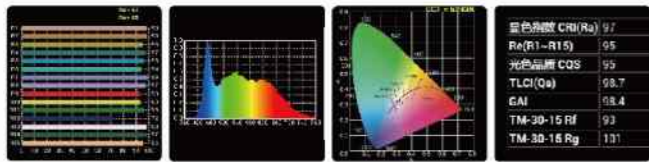

- COLORITE 高显色
- TOUCH READY 触屏
- QUIET-MODE 静音模式
- SHARE YOUR MOVE 互控




P5AD



- COLORITE 高显色
- TOUCH READY 触屏
- QUIET-MODE 静音模式
- SHARE YOUR MOVE 互控



P8A

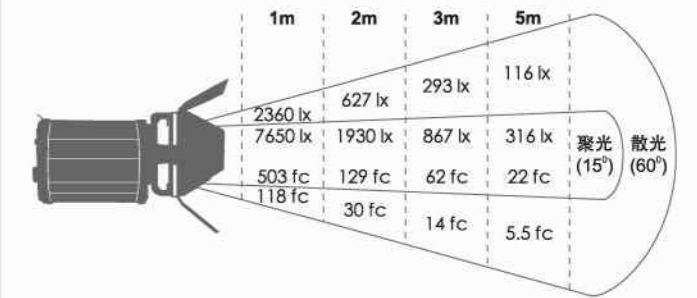

- COLORITE 高显色
- TOUCH READY 触屏
- SHARE YOUR MOVE 互控



P5A + PA-K6





# BL-10TD

## 电池LED摄影摄像灯

LED SPOT LIGHT-BATEL

- Touch Screen 触屏
- Mutual Control 互控
- High CRI 高色显



### PRODUCT SPECIFICATION 产品参数

Model No. 型号	P5A	P5AD	P8A	BL-10TD	
LEDs & Power LED灯泡数及功率	1pcs x 50W	1pcs x 100W	1pcs x 100W	1pcs x 100W	
Out put Wattage 输出功率	50W		80W	100W	
Color Temperature 色温	3000K / 5600K	3000-5600K	3000K / 5600K	3000K- 8000K	
Operating Voltage 工作电压	DC-15V 5A		DC-15V 7A	DC-15V 7A	
Compatibility 兼容性	AC Adaptor 适配器	Sony V Mount Battery (DC) V卡口电池座		AC Adaptor 适配器 内置可装锂电池14.8V/3000MAH/ 充电器16.8/15A	
Dimming 调光	0-100% Stepless Dimming 0-100% 无极调光			0-100% Step-less dimming 0-100% 无极调光	
Beam Angle 照射角度	12°-51°	15°-60°		37°	
Control Function 调控方式	Touch Screen 触屏 ON/OFF开关 Mutual Control 互控			ON/OFF 开关 Touch Screen 触屏 Mutual Control 互控	
CRI 显色度	97			95	
Lux 照度	(散光) Flood	0.5M:8870 1M:2170 2M:550 3M:269 5M:121	0.5M:5010 1M:1270 2M:326 3M:151 5M:58.9	0.5M:9720 1M:2360 2M:627 3M:293 5M:116	0.5M:28600 1M:4620 2M:936 3M:417
	(聚光) Focus	0.5M:37000 1M:12000 2M:3120 3M: 1390 5M:589	0.5M:17200 1M:5410 2M:1390 3M: 666 5M:241	0.5M:30900 1M:7650 2M:1930 3M: 867 5M:316	
Footcandles 英尺烛光	(散光) Flood	0.5M:824 1M:202 2M:51 3M: 25 5M:11	0.5M:466 1M:118 2M:30 3M: 14 5M:5.5	0.5M:903 1M:219 2M:58 3M: 27 5M:11	0.5M:2658 1M:429 2M:87 3M:39
	(聚光) Focus	0.5M:3439 1M:1115 2M:290 3M: 129 5M:55	0.5M:1599 1M:503 2M:129 3M: 62 5M:22	0.5M:2871 1M:711 2M:179 3M: 81 5M:29	
Mounting Method 安装配套	L-Bracket L支架 Barndoor 挡光板			Handle手柄MP-155B	
Dimensions 机身尺寸	234×145mm		240×145mm	258×159mm	
Weight 重量	1.65kg		2.09kg	1.88KG	
In the box 配件	L-Bracket L支架 Carry Bag 布袋 Adaptor Dc-15V 适配器DC-15V Barn door挡光板			内置可装锂电池14.8V/5800MAH/ 充电器16.8/15A Handle手柄MP-155B/Bags摄影包/ Reflector标准罩SR-18	
Optional Accessories 选购配件	Light Stang 灯架 : I-2001/B Li-ion Battery 锂电池: BP-100L				
PA-K6配件套装	柔光球 (SGA-BD150) 柔光箱 (SGA-SB2030) 束光筒 (SGA-CS) 金属蜂巢 (SGA-HC1010) 六色滤色片(P5-CF,20x25cm) 转接头 (P5-A)			—	

# ACCESSORIES 锂电池及配件

F A L C O N E Y E S

Falcon Eyes has a line of LED accessories to support the light product and enrich the creativity of shaping different light form. With great accessories support, it can also make the production job more enjoyable.

锐鹰设有一系列的LED选购配件用以辅助各系列的LED灯及帮助塑造更多不同的灯光效果。在配合锐鹰的LED配件使用LED产品可以令你的拍摄工作更加轻松。

PATENT  
PRODUCT!

## LI-ION BATTERY/ 锂电池

### MPS-900Pro Power Station 菲斯锂电池逆变器 (最大输出 500W/900Wh)

The Falcon Eyes MPS-900Pro is the power station that supplies both AC & DC power for you anywhere in the world. It is designed with two versions which are suitable to use with either 110V and 230V.

There's 1 x AC socket to provide a maximum power of 500W, while a maximum of 120W generated from the DC power.

The MPS-900Pro will be your new portable power station for outdoor shootings, in the meantime an outdoor AC socket for recharging your laptops, cell phones, cameras, and all other electronic devices.

锐鹰最新推出的MPS-900Pro 是一款可同时提供AC及DC电源箱, 可随时随地为你提供可靠电源。

MPS-900Pro可以为110V或230V的电子器材提供电源。

MPS-900Pro有一个可输出高达500W的交流电插口, 而直流电插口则可输出高达120W。

MPS-900Pro绝对是外拍不可或缺的便携式电源箱, 而采用了国际插口的交流电更可以为各式电子产品提供电源, 用家再不用担心在外工作有电源不足的情况。



Model 型号	MPS-900 Pro
Battery capacity 电池容量	34000mAh(900Wh),25.9V
AC output AC输出	500W(max) 230V,50/60Hz or 110V,50/60Hz
DC output DC输出	120W,12V,10A
Input charge	DC 29.4V(max),5A
AC output socket AC电源插口	1
AC output switch AC电源插口开关	1
DC output socket DC电源插口	1
DC output switch DC电源插口开关	1
Recharging time 充电时间	10 hours



BP-100L / BP-160 / BP-260HL / BP-260VL



BP-100L(14.8V,100Wh / 6600mAh) Sony V-mount  
FC-B1 (充电器Charger)

BP-160(14.8V,160Wh / 10000mAh) Sony V-mount  
FC-B1 (充电器Charger)



BP-260HL(14.8V,260Wh / 17000mAh) Sony V-mount  
FC-B1 (充电器Charger)

BP-260VL(26V,260Wh / 10000mAh) Sony V-mount  
FC-B2 (充电器Charger)



NP-F550  
7.4V 2300mA 17Wh



NP-F750F  
7.4V 4600mA 34Wh



NP-F960F  
7.4V 6000mA 44.4Wh



充电器 SP-CHG  
Charger SP-CHG



AD-PS1



AD-PS1A(电量显示)

AD-PS2 供电系统

MULTI-FUNCTIONAL  
SONY V-MOUNT BATTERY BASE  
多功能索尼V卡口电池座

AD-PS2 is a supplementary power source for your photographic equipments. With 4 outputs: 5V USB port, 7.4V 3.5mm female jack, 12V 5.5mm female jack and a 14.8V 2 pin female jack, it converts SONY V-Mount battery into a universal power bank. The dual bridge plate at the back makes it a perfect counter weight plus power source for users shooting microfilm with DSLR rig.

AD-PS2是一个为你的摄影工具提供额外电源的配件。AD-PS2有4款输出插口，分别为5V USB插口，3.5mm插口，12V 5.5mm插口及14.8V 双针插口。这些插口令AD-PS2成为了一个多元化的供电系统。电池座的底部更配备了一个5mm双孔管夹，使AD-PS2配上V卡口电池后可作摄录架的配重及外挂电源使用。



## TRIPLEPOWERCONICALSNOOT 3倍功率放大聚光筒

### LPSA-BOF

可调焦距12-40度 3倍功率放大聚光筒  
标配保菜口, 可更换不同品牌卡口

The new LPSA-BOF conical snoot is mainly designed for LED lighting, it could dramatically increase the exposure value(EV) of about 3 times more than its original (when zoomed), which could be a good help during all types of video filming and photo shooting. It's designed with the concept of snoot for producing concentrated light projection.

锐鹰专为LED常亮灯推出功率放大聚光筒, 使用专利蜂眼聚光筒后, 能大大的提升LED灯光的亮度, 使用后对比使用前能有效的提高3倍左右的EV值, 这有效的解决了LED常亮灯光在拍摄模特或者静物时亮度低的弱点, 同时具有聚光筒的功能, 调节灯光的焦距离, 调节灯光角度从12度 - 40度之间。并配有十种色片, 可打光十种不同的颜色背景光。



附送十色片



使用前F22

使用后F90

## SGA-BOS 机顶闪光灯2倍功率放大聚光筒

The SGA-BOS light extender is designed for all speedlites, it can be connected through the Falcon Eyes CA-SGU universal adaptor. It could dramatically increase the exposure value (EV) of about 2 times more than its original, which could be a good help during the photo shooting.

锐鹰结合蜂眼专利技术, 特别为机顶闪光灯推出了SGA-BOS功率放大器配件, 它通过CA-SGU配件, 完美的和机顶闪光灯相结合, 使闪出灯光更为集中, 并提升两倍亮度, 使拍出物体层次更为丰富, 在远距离拍摄模特时, 有时显的灯光增强效果, 并同时具有聚光功能。并配有十种不同的色片, 拍出不同的颜色背景光。



SGA-BOS

CA-SGU



蜂眼镜片可正反面掉换  
正面: 聚光 反面: 散光




## 大型蜂巢屏 Gaint Grid Panel

LHC-24(2.4x2.4m) LHC-36(3.6x3.6m) LHC-60(6.0x6.0m)



LHC-24K

LM-3900H 灯架 x 2  
CL-40EC 套夹 x 2  
2.4x2.4m 框 x1  
Diffusor 柔光布 x 1

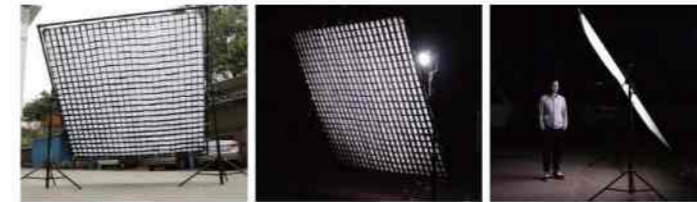

## 挂墙臂架WB-2100B

Wall Boom



Stretch Range 拉伸范围	Swying Range 摆幅	Loading Capacity 受力测试		Net Weight 产品净重
		Stretch Length 伸缩长度	Loading Weight 承重	
Max. Length 最长2.1m	Top to Bottom 上至下170°	1.2m	20kg	3.3kg
		1.4m	10kg	
Min. Length 最短1.2m	Left to right 左至右180°	1.6m	8kg	
		2.1m	5kg	



## 易撑蜂巢屏 Foldable Grid Diffusor

CR-B1520HC (1.5 x 2.0m)



## 摇臂灯架 JHS-01MC Jupiter Heavy-Duty Stand

Model 型号	JHS-01MC
Section 节数	2
Max.Height 最高 (cm)	186
Min.Height 最低 (cm)	117
Collapsed Height 收起高度 (cm)	132
Spread 直径 (cm)	132
Poles 直径 (mm)	70/60
Poles 直径 (mm)	36
Risers 胶盘	1
Net Weight 净重 (kg)	30
Load Weight 载重 (kg)	85

## 横臂架LSB-8 (LB-36M1 + LM-2900HAB) Light Boom with Stand



Stand Height 灯架高度 (cm)	119-284cm
Section 节数	3
Boom Length 横杆长度 (cm)	220cm
Boom Sections 横杆节数	2
Diameter 管径 (cm)	31.5-35.6cm
Stud 接头	1/4 & 3/8
Max. Loading Weight 最大负重 (kg)	5kg
Net Weight 净重 (kg)	5.8kg