

双向多功能 拾音麦克风

Two-way Multi-function Pickup Microphone

为声音而生 为便携而造
born for sound, made for portability

- 专业防风降噪
Professional wind and noise reduction
- 无需充电, 即插即用
No Need To Charge, Plug And Play
- 双向拾音, 立体全景记录
Two-way Sound Pickup, Stereo Panoramic Recording
- 高灵敏捕捉每个声音细节
Highly sensitive to capture every sound detail
- 一麦多用, 兼容手机、平板、单反、摄像机等大多数设备
One microphone for multiple purposes, compatible with mobile phones, tablets, DSLR, etc.



SMC-1



技术参数 PRODUCT SPECIFICATION

● 型号 Model No.	SMC-1	● 最大声压 Maximum sound pressure	>105dB	● 电池 Battery	无电池 Without battery
● 拾音模式 Pickup mode	双向超级心形 Two-way cardioid polar pattern	● 输出口 Output port	3.5mm TRRS	● 灵敏度 Sensitivity	-46dB
● 频率范围 Frequency range	20Hz~20KHz	● S/N	>75dB	● 重量 Weight	105g
● 尺寸 size	Φ22mm x L179mm				

包装清单 KIT CONTENTS



专利产品
PATENT
PRODUCT

2021

FILM AND BROADCAST
LIGHTING

BRIGHTER / LIGHTER / AND BETTER



Falcon Eyes
Official Website (HK)

FALCON EYES LTD.

Tel 852-2363-2825 Email info@falconeyes.com.hk
Fax 852-2363-3856 Website http://www.falconeyes.hk
Add Unit E1, 11/F, Phase 1, Hang Fung Building, 2G Hok Yuen Street, Hung Hom, Kowloon, Hong Kong

(FALCON EYES) YINGKE PHOTOGRAPHIC EQUIPMENT FACTORY

Add 3rd Building, Dongsheng Industrial Zone (beside The 2nd Dongsheng Road), Huangdong Village, Fenggang Town, Dongguan City, Guangdong Province, China
We reserve the rights to make any changes due to technical developments.
© Copyright, Falcon Eyes Ltd.

LPS-80T 80W



LPS-80T (80W)

Lux/照度	0.5m	1m	2m
	61000	11600	2600

单灯标配发货清单 Single lamp standard content



LPS-150T 150W




LPS-150T (150W)

Lux/照度	0.5m	1m	2m
	109000	18400	4280



单灯标配发货清单 Single lamp standard content



LPS-200TD 200W

LPS-200TD (200W)

Lux/照度	0.5m	1m	2m
	158000	23500	5050



单灯标配发货清单 Single lamp standard content



Model No. 型号	LPS-80T	LPS-150T	LPS-200TD
LEDs & Power LED 灯泡数及功率	1Pcs × 80W	1Pcs × 150W	1Pcs × 200W
Out put Wattage 输出功率	80W	150W	200W
Color Temperature 色温	5600K	5600K	3000K-8000K
Operating Voltage 工作电压	DC24V	AC100V-240V	AC100V-240V
Dimming 调光	亮度0-100%	0-100% Stepless Dimming 0-100% 无极调光	0-100% Stepless Dimming 0-100% 无极调光
Compatibility 兼容性	AC Adaptor 适配器	AC POWER 交流电/DC电源	AC POWER 交流电/DC电源
Control Function 调控方式	ON/OFF 开关 Turning Knob 旋钮 遥控器	按钮 / DMX-512 / APP	Turning Knob 旋钮 WiFi Application 无线WIFI Touch Screen 轻触屏
CRI 显色度	96	96	96
Lux 照度	5600K / 0.5M 61000 / 1M 11600 / 2M 2600 / 3M 1150	5600K / 0.5M 109000 / 1M 18400 / 2M 4280 / 3M 1900	5600K / 0.5M 158000 / 1M 23500 / 2M 5050 / 3M 2210
Beam Angle 照射角度	66° (裸灯) 26° (加标准罩)	30°	36°
Footcandles 英尺烛光	5600K / 0.5M 5669 / 1M 1078 / 2M 241 / 3M 106	5600K / 0.5M 10130 / 1M 1710 / 2M 398 / 3M 177	5600K / 0.5M 14684 / 1M 2184 / 2M 469 / 3M 205
Dimensions 机身尺寸	220x190x115mm	420x185x140mm	616x220x130mm
Weight 重量	0.93Kg	2.1Kg	3.6Kg
Noise Level (dB) 噪音分贝强度	0.2M:45dB 0.5M:38.6dB	0.2M:44.3dB 0.5M:38.3dB	0.2M:49.7dB 0.5M:42.1dB
In the box 配件	标准罩、适配器、BAG布袋	标准罩/电源线	标准罩/色罩/电源线
Optional Accessories 选购配件	/	/	/

DSL-200T 200W



DSL-200T 200W

Lux/照度	0.5m	1m	2m
	155000	23000	4880



单灯标配发货清单 Single lamp standard content



1 DSL-200T x1



2 电源线 x1
Power cable



3 标准罩SR-18L x1
Standard reflector



4 柔光布 x1
Diffusor



5 收纳包 x1
Carry bag

选购配件 OPTIONAL ACCESSORIES



柔光球
Diffusor Ball



半球柔光箱
Diffusor Dome



方形柔光箱
Softbox



八角柔光箱
Octagonal Softbox



抛物线柔光箱
Parabolic Softbox



猪嘴束光筒
Snoot




雷达罩
Beauty Dish



光学聚光筒
Optical Snoot

DSL-300T 300W



DSL-300T 300W

Lux/照度	0.5m	1m	2m
	270000	60100	14200

单灯标配发货清单 Single lamp standard content



1 DSL-300T x1



2 电源线 x1
Power cable



3 标准罩SR-18L x1
Standard reflector



5 收纳包 x1
Carry bag

Model No. 型号	DSL-200T	DSL-300T
LEDs & Power LED 灯泡数及功率	1Pcs×200W	1Pcs×300W
Out put Wattage 输出功率	200W	300W
Color Temperature 色温	5600K	5600K
Operating Voltage 工作电压	AC100V-240V	AC100V-240V
Dimming 调光	0-100% Stepless Dimming 0-100% 无极调光	0-100% Stepless Dimming 0-100% 无极调光
Compatibility 兼容性	AC POWER 交流电	AC POWER 交流电
Control Function 调控方式	蓝牙/ 按键	蓝牙/ 按键
CRI 显色度	96	96
Lux 照度	5600K / 0.5M155000 / 1M 23000 / 2M 4880 / 3M 2150 5M: 825	5600K / 0.5M 270000 / 1M 60100 / 2M 14200 / 3M 6260 5M: 2310
Beam Angle 照射角度	61°/裸灯 35°/加标准罩	65°裸灯 32°+标准罩
Footcandles 英尺烛光	5600K / 0.5M 14405 / 1M 2137 / 2M 453 / 3M 199 5M: 76	5600K / 0.5M 25092 / 1M 5585 / 2M 1319 / 3M 581 5M: 214
Dimensions 机身尺寸	425x190x160mm	412x310x163mm
Weight 重量	2.09Kg	2.93Kg
Noise Level (dB) 噪音分贝强度	0.2M:40.5dB 0.5M:37dB	0.2M:41dB 0.5M:37.1dB
In the box 配件	标准罩/电源线/收纳包	标准罩/电源线/专用包
Optional Accessories 选购配件	/	/

S20 200W



单灯标配发货清单 Single lamp standard content



- ① S20 x1
- ② 控制盒 x1
Control box
- ③ 标准罩SR-19L x1
Standard reflector
- ④ 电源线 x1
Power cable
- ⑤ 控制线 x1
Power cable
- ⑥ 大力夹 x1
Clamp
- ⑦ 背带 x1
Strap
- ⑧ 防撞箱 x1
Carry case

Desal lite+ S20 200W (9种特效)

Lux/照度	0.5m	1m	2m
	200000	60800	14500

S30 300W



单灯标配发货清单 Single lamp standard content



- ① S30 x1
- ② 大力夹 x1
Clamp
- ③ 控制盒 x1
Control box
- ④ 标准罩SR-19L x1
Standard reflector
- ⑤ 电源线 x1
Power cable
- ⑥ 控制线 x1
Power cable
- ⑦ 背带 x1
Strap
- ⑧ 防撞箱 x1
Carry case

Desal lite+ S30 300W (9种特效 9 SPECIAL EFFECTS)

Lux/照度	0.5m	1m	2m
	380000	86400	20200



BL-30TD II 300W



单灯标配发货清单 Single lamp standard content



- ① 延长线 x1
Extension cable
- ② 天线 x1
Antenna
- ③ 电源线 x1
Power cable
- ④ 防撞箱 x1
Carry case
- ⑤ 标准罩SR-18L x1
Standard reflector
- ⑥ 控制盒 x1
Control box
- ⑦ BL-30TD II x1

BL-30TD II (300W) 3000-8000K可调色温

Lux/照度	0.5m	1m	2m
	156000	24400	5480

Model No. 型号	S20	S30	BL-30TDII
LEDs & Power LED 灯泡数及功率	1Pcs×200W	1Pcs×300W	1Pcs×300W
Out put Wattage 输出功率	200W	300W	300W
Color Temperature 色温	5600K	5600K	3000K-8000K
Operating Voltage 工作电压	AC100V-240V	AC100V-240V	AC-110V-240V
Dimming 调光	0-100% Stepless Dimming 0-100% 无极调光	0-100% Stepless Dimming 0-100% 无极调光	0-100% Stepless Dimming 0-100% 无极调光
Compatibility 兼容性	AC POWER 交流电	AC POWER 交流电	AC POWER 交流电 Sony V Mount Battery (DC) V卡口电池座
Control Function 调控方式	蓝牙/ 按键	蓝牙/ 按键	Touch Screen Turning knob DMX 2.4G remote/RC-5C 按钮/ 旋钮 DMX 2.4G遥控器RC-5C
CRI 显色度	96	96	95
Lux 照度	5600K / 0.5M 200000/ 1M 60800 / 2M 14500 /3M 6300 5M: 2320	5600K / 0.5M 380000 / 1M 86400 / 2M 20200 /3M 9000 5M: 3230	5600K 0.5M:156000 1M:24400 2M:5480 3M:2410 5M:951 3000K 0.5M:70900 1M:11100 2M:2510 3M:1100 5M:434
Beam Angle 照射角度	60°/裸灯 20°/加标准罩	24°	34°
Footcandles 英尺烛光	5600K / 0.5M 18587 / 1M 5650 / 2M 1347 /3M 585 5M: 215	5600K / 0.69M 18587 / 1M 8029 / 2M 1877 /3M 836 5M:300	5600K 0.5M:14498 1M:2268 2M:509 3M:224 5M:88 3000K 0.5M:6589 1M:1032 2M:233 3M:102 5M:40
Dimensions 机身尺寸	325x215x135mm	400x215x135mm	490×210×150mm
Weight 重量	灯 1.91Kg 电源 1.38Kg	灯 2.52Kg 电源 2.41Kg	灯 2.75KG 电源 2.51KG
Noise Level (dB) 噪音分贝强度	0.2M:39dB 0.5M:36.6dB	0.2M:39.8dB 0.5M:36.6dB	灯 0.2M:47.1dB 0.5M:40.5dB 电源 0.2M:42dB 0.5M:37.1dB
In the box 配件	标准罩/电源线	标准罩/控制盒/电源线/大力夹	标准罩/控制盒/电源线/U架
Optional Accessories 选购配件	/	/	遥控器 RC-5C

影视直播灯一览表 / List of film and broadcast lighting



LPS-80T

- 5600K标准色温
- 红外无线遥控 Wireless Remote Control
- 9种特效 9 SPECIAL EFFECTS



LPS-150T

- 5600K标准色温
- APP调控 APP control
- 9种特效 9 SPECIAL EFFECTS



S20

- 5600K标准色温
- APP调控 APP control
- 9种特效 9 SPECIAL EFFECTS
- 双模供电 AC/DC integrated



S30

- 5600K标准色温
- APP调控 APP control
- 9种特效 9 SPECIAL EFFECTS
- 双模供电 AC/DC integrated



LPS-200TD

- 3000-8000K可调色温
- APP调控 APP control



DSL-200T

- 5600K标准色温
- APP调控 APP control
- 9种特效 9 SPECIAL EFFECTS



DSL-300T

- 5600K标准色温
- APP调控 APP control
- 9种特效 9 SPECIAL EFFECTS



BL-30TD II

- 3000-8000K可调色温
- 遥控 Remote Control
- 9种特效 9 SPECIAL EFFECTS
- 双模供电 AC/DC integrated

双色温系列直播补光灯 / Bi-color fill light

更亮/更轻便/更好用 Brighter / lighter / and better



Android:
手机浏览器扫描二维码下载安装
Scan the QR code to download and install

IOS:
App Store搜索“DESAL Lite+”下载安装
Search “DESAL Lite+” in App Store to
download and install



LPS-150TD 150W

- 108,000lux
0.5米照度
- 2500-9999K
可调色温
adjustable temperature
- DMX512专业调光
DMX-READY
- 手机APP智能调控
APP control
- 9种场景特效
9 SPECIAL EFFECTS



单灯标配发货清单 Single lamp standard content

- 1 LPS-150TD x1
- 2 柔光布 x1
Diffusor
- 3 标准罩SR-18L x1
Standard reflector
- 4 电源线 x1
Power cable



S20TD 200W

- 190,000lux
0.5米照度
- 2500-9999K
可调色温
adjustable temperature
- 手机APP智能调控
APP control
- 双模供电一体控盒
AC/DC integrated
control box
- DMX512专业调光
DMX-READY
- 9种场景特效
9 SPECIAL EFFECTS



双模供电一体控盒
Control box



单灯标配发货清单 Single lamp standard content

- 1 S20TD x1
- 2 控制盒 x1
Control box
- 3 标准罩SR-19L x1
Standard reflector
- 4 电源线 x1
Power cable
- 5 控制线 x1
Power cable
- 6 大力夹 x1
Clamp
- 7 背带 x1
Strap
- 8 防撞箱 x1
Carry case



S30TD 300W

- 330,000lux
0.5米照度
- 2500-9999K
可调色温
adjustable temperature
- 手机APP智能调控
APP control
- 双模供电一体控盒
AC/DC integrated
control box
- DMX512专业调光
DMX-READY
- 9种场景特效
9 SPECIAL EFFECTS
- 双静音风扇散热
Dual silent
cooling fan



双模供电一体控盒
Control box



单灯标配发货清单 Single lamp standard content

- 1 S30TD x1
- 2 大力夹 x1
Clamp
- 3 控制盒 x1
Control box
- 4 标准罩SR-19L x1
Standard reflector
- 5 电源线 x1
Power cable
- 6 控制线 x1
Power cable
- 7 背带 x1
Strap
- 8 防撞箱 x1
Carry case



DSL-200TD 200W

- 165,000lux 0.5米照度
- 手机APP智能调控 APP control
- DMX512专业调光 DMX-READY
- 2500-9999K 可调色温 adjustable temperature
- 双静音风扇散热 Dual silent cooling fan
- 9种场景特效 9 SPECIAL EFFECTS



单灯标配发货清单 Single lamp standard content

- 1 DSL-200TD x1
- 2 电源线 x1 Power cable
- 3 标准罩SR-18L x1 Standard reflector
- 4 柔光布 x1 Diffusor
- 5 收纳包 x1 Carry bag

DSL-300TD 300W

- 250,000lux 0.5米照度
- 手机APP智能调控 APP control
- DMX512专业调光 DMX-READY
- 2500-9999K 可调色温 adjustable temperature
- 双静音风扇散热 Dual silent cooling fan
- 9种场景特效 9 SPECIAL EFFECTS



单灯标配发货清单 Single lamp standard content

- 1 DSL-300TD x1
- 2 电源线 x1 Power cable
- 3 标准罩SR-18L x1 Standard reflector
- 4 收纳包 x1 Carry bag

双色温系列直播灯参数一览表 / List of bi-color lighting

LPS-150TD/150W



- 调控方式 Control Function 按键Switch 蓝牙APP DMX-512
- 色温 Color Temperature 2500-9999K
- 工作电压 Operating Voltage AC100V-240V
- 兼容性 Compatibility AC POWER 交流电
- 照度 Lux 0.5M 108000 1M 16700 2M 3700
- 英尺烛光 Footcandles 0.5M 10037 1M 1552 2M 343
- 机身尺寸 Dimensions 420x185x140mm

S20TD/200W



- 调控方式 Control Function 按键Switch 蓝牙APP DMX-512
- 色温 Color Temperature 2500-9999K
- 工作电压 Operating Voltage AC100V-240V
- 兼容性 Compatibility AC POWER 交流电/DC电源
- 照度 Lux 0.5M 190000 1M 43000 2M 10100
- 英尺烛光 Footcandles 0.5M 17657 1M 3996 2M 938
- 机身尺寸 Dimensions 325x215x135mm

S30TD/300W



- 调控方式 Control Function 按键Switch 蓝牙APP DMX-512
- 色温 Color Temperature 2500-9999K
- 工作电压 Operating Voltage AC100V-240V
- 兼容性 Compatibility AC POWER 交流电/DC电源
- 照度 Lux 0.5M 330000 1M 67500 2M 15500
- 英尺烛光 Footcandles 0.5M 30669 1M 6273 2M 1440
- 机身尺寸 Dimensions 400x215x135mm

DSL-200TD/200W



- 调控方式 Control Function 按键Switch 蓝牙APP DMX-512
- 色温 Color Temperature 2500-9999K
- 工作电压 Operating Voltage AC100V-240V
- 兼容性 Compatibility AC POWER 交流电
- 照度 Lux 0.5M 165000 1M 26200 2M 5710
- 英尺烛光 Footcandles 0.5M 15334 1M 2434 2M 530
- 机身尺寸 Dimensions 420x185x140mm

DSL-300TD/300W




- 调控方式 Control Function 按键Switch 蓝牙APP DMX-512
- 色温 Color Temperature 2500-9999K
- 工作电压 Operating Voltage AC100V-240V
- 兼容性 Compatibility AC POWER 交流电
- 照度 Lux 0.5M 250000 1M 53000 2M 11900
- 英尺烛光 Footcandles 0.5M 23234 1M 4925 2M 1105
- 机身尺寸 Dimensions 412x310x163mm

全彩直播补光灯 / Full RGB fill light

DS-300C Pro/300W

- 157,000lux 0.5米照度
- 手机APP智能调控 APP control
- DMX512专业调光 DMX-READY
- 双静音风扇散热 Dual silent cooling fan
- 2800-10000K 可调色温 adjustable temperature
- 双模供电一体控盒 AC/DC integrated control box
- 21种场景特效 21 SPECIAL EFFECTS

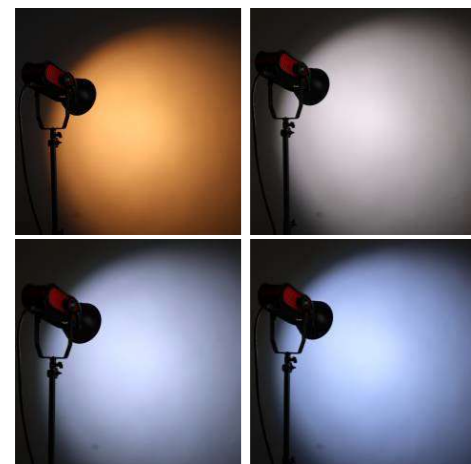

2800-10000K超宽色温可调
2800-10000K adjustable temperature



RGB全彩可调
Full RGB




DS-300C Pro/300W

- 输出功率 Out put Wattage 300W
- 灯泡数及功率 LEDs & Power LED 1Pcs × 500W
- 调控方式 Control Function 按键Switch 蓝牙APP DMX-512
- 色温 Color Temperature 2800-10000K
- 工作电压 Operating Voltage AC100V-240V
- 兼容性 Compatibility AC POWER 交流电/DC电源
- 照度 Lux 0.5M 157000 1M 28300 2M 6260
- 英尺烛光 Footcandles 0.5M 14591 1M 2630 2M 581
- 机身尺寸 Dimensions 412x310x163mm

抛物线蜂巢柔光箱 Parabolic Foldable Grid Softbox

一、SOB系列 / SOB Series

保荣卡口 Bowens bayonet

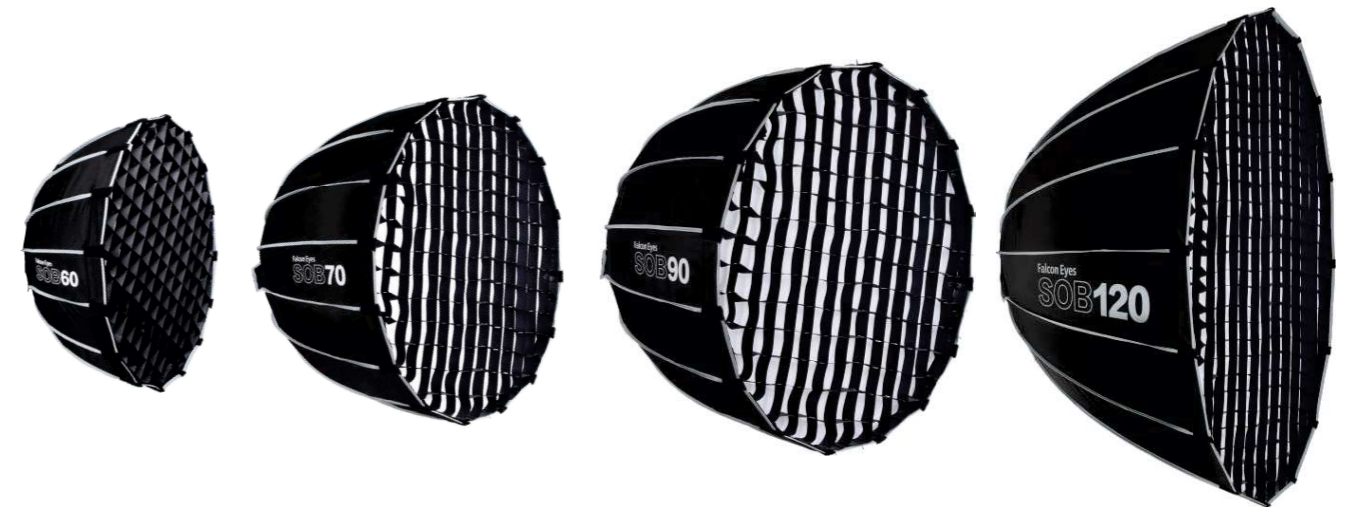

SOB60+HC

SOB70+HC

SOB90+HC

SOB120+HC



二、SPB系列 / SPB Series



SPB90+HC

SPB70+HC

快拆快装卡盘 Quick release bayonet



锐鹰深口抛物线蜂巢柔光箱采用新一代快拆快装卡盘以及16根钢制伞骨，一拉一按，即可轻松完成安装和拆卸，解决了柔光箱拆装困难的问题。

FalconEyes deep parabolic grid softbox adopts a new generation of quick release bayonet and 16 steel umbrella ribs. Just one pull and one press, installation and disassembly can be easily completed, which solves the problem of time consuming assembly of traditional softbox.



LPS-200TD

LPS-200TD+灯箱

LPS-200TD+灯箱+柔光布

LPS-200TD+灯箱+蜂巢网格



DeSal SIK



锐鹰是一款采用了DEAL-8系统设计的RGBW LED聚光灯，它拥有先进的照明控制系统，可以通过RGBW技术产生广泛的照明效果。新的照明控制系统使您可以灵活地控制色温，从2800K 到10000K无级调光，色彩平衡GM + 1- 1.0调整，RGB颜色调整，以及HSI(色调，饱和度，强度)颜色调整等等

更令人兴奋的是，新的DESAL-8系统具有内置色片模式配备了多种常用的颜色，您只需要选择色片代码即可快速生成您想要创造的灯光颜色。

DESAL-8系统具有内置的场景特效模式，预定有多种灯光特效，例如警车灯，烛光，闪电等等。无需通过复杂的程序系统即可创建出灯光特效于任何场合使用。

此外，DESAL-8系统配备了16位PWM至DMX-512信号输出，并支持DMX控制系统以及智能手机应用程序（APP），从而提供了更多的远程控制可能性。

The Falcon Eyes DM-series is a RGBW LED Fresnel that is designed with the new DESAL-8 series system, it has an advanced lighting control system that can produce a wide range of lighting effects through RGBW technology The new lighting control system gives you flexibility to control color temperature step-less from 2800K to 10000K, color balance GM +1- 1.0 tuning, RGB colors adjustment, HSI (Hue, Saturation, Intensity) colors adjustment etc.

What's more exciting is that the new DESAL-8 system has a built-in Color Gel mode and is equipped with a variety of commonly used colors. You only need to select the color code to quickly generate the ideal light color you want to create.

The DESAL-8 system has a built-in Scene Effect mode with preset lighting effects like cop car light, candle light, lightning, etc. No need to go through a complicated programming system to create lighting effects for use in any occasion.

In addition, DESAL-8 system is equipped with high-resolution 16Bit PWM to DMX-512 signal output, and it supports DMX control system as well as smartphone application (APP), thereby providing more remote control possibilities.

200W/400W RGB 全彩聚光灯

DM SERIES LED FRESNEL

DM2 200W

DM4 400W



单灯标配发货清单 Single lamp standard content

- 1 BG-DM2/DM4
- 2 DM2/DM4
- 3 电源线 Power cable
- 4 保险钢丝 Fuse
- 5 挡光板 Barn-door
- 6 遮光布 Cover cloth



Model No. 型号		DM2	DM4
LEDs & Power LED 灯泡数及功率		1PCS×200W	1PCS×400W
Out put Wattage 输出功率		200W	400W
Color Temperature 色温		2800K - 10000K RGB 彩色	
Operating Voltage 工作电压		AC 110-240V 60 HZ/50HZ	
Dimming 调光		0-100% Stepless Dimming 0-100%无极调光 0-255 Saturation dimming 0-255饱和度调光	
Compatibility 兼容性		AC POWER 交流电	
Control Function 调控方式		开关 / OL液晶屏 / 蓝牙 / 遥控 / 按键 / DMX-512 / 旋钮 / 手机APP	
CRI 显色度		95	
Lux 照度	5600K聚光	0.5M: 64200 1M:16200 3M:1800 5M:709 7M:401 9M:217	0.5M: 123000 1M:31800 3M:3540 5M:1330 7M:710 9M:445
	2800K聚光	0.5M: 54000 1M:13400 3M:2974 5M:618 7M:350 9M:189	0.5M: 102000 1M:26800 3M:2990 5M:1120 7M:601 9M:376
	5600K散光	0.5M: 32400 1M:8040 3M:953 5M:397 7M:227 9M:132	0.5M: 63000 1M:15500 3M:1750 5M:688 7M:379 9M:231
	2800K散光	0.5M: 27600 1M:6960 3M:833 5M:344 7M:196 9M:114	0.5M: 52800 1M:13100 3M:1480 5M:579 7M:321 9M:195
Beam Angle 照射角度		28°-53°	
Footcandles 英尺烛光	5600K聚光	0.5M: 5966 1M:1506 3M:167 5M:66 7M:37 9M:20	0.5M: 11431 1M:2955 3M:329 5M:124 7M:66 9M:41
	2800K聚光	0.5M: 5018 1M:1245 3M:276 5M:57 7M:32 9M:18	0.5M: 9480 1M:2490 3M:278 5M:104 7M:55 9M:35
	5600K散光	0.5M: 3011 1M:747 3M:89 5M:37 7M:21 9M:12	0.5M: 5855 1M:1441 3M:163 5M:64 7M:35 9M:25
	2800K散光	0.5M: 2565 1M:647 3M:77 5M:32 7M:18 9M:11	0.5M: 4907 1M:1217 3M:138 5M:54 7M:30 9M:18
Dimensions 机身尺寸		560×260×250mm	
Weight 重量		7.6KG	
Noise Level (dB) 噪音分贝强度	温度40°C: 噪音:20CM:40.1dB 50CM:36.7dB	温度40°C: 噪音:20CM:40.2dB 50CM:38.4dB	
	温度50°C: 噪音:20CM:42.3dB 50CM:37.5dB	温度50°C: 噪音:20CM:43.1dB 50CM:39.5dB	
	温度60°C: 噪音:20CM:45.8dB 50CM:39.8dB	温度60°C: 噪音:20CM:46.2dB 50CM:41.6dB	

大型易撑柔光箱

Large size foldable softbox

锐鹰PBX系列是一款可折叠的网格八角柔光箱，有助于产生柔和美丽的光源，适用于人像，采访和时尚拍摄等等。柔光箱内部使用了银色反射材料制成，可提供明亮的光输出和良好的反射效果，柔光箱设计了两层内外柔光罩以确保光线可以均匀折射，标准还配备了网格以允许光线聚焦和方向控制。

PBX系列八角柔光箱具有可折叠和拉伸功能，以方便拍摄时可快速设置及收起。PBX柔光箱提供不同的接环版本，可与不同的锐鹰LED聚光灯配合使用，两种接环版本都有各种柔光箱尺寸(直径90厘米/120厘米/150厘米/180厘米)可根据你拍摄需求选择。



蜂巢 Grid 外柔光布 Outer diffuser 内柔光布 Inner diffuser 柔光箱 Softbox

The FalconEyes PBX series is a foldable grid octabox that help to produce beautiful spread of soft light, which is suitable for portraits, interviews, and fashion etc. The inside of this softbox is built with silver reflective material to provide bright light output and nice reflection, it comes with both inner and outer diffuser to ensure that the light can be diffused evenly, grid is also included standard to allow the light focus and direction control.

The PBX series octabox is designed with foldable and stretchable feature to facilitate quick setup and break down during shooting. It comes in different adaptor version to be used with different FalconEyes LED Fresnel, both versions are available in various softbox sizes (dia. 90cm/120cm/150cm/180cm) which can be selected according to your shooting needs.

PBX90S / 120S / 150S & PBX120M / 150M / 180M

* 一级光圈之内 Within 1-stop of aperture



* PBX90S/120S/150S适用于阿莱L7-C
PBX90S/120S/150S is compatible with Arri L7-C

型号	直径
PBX90S	90cm
PBX120S	120cm
PBX150S	150cm
* DM2/CLL-1600系列/2000Pro系列适用	

型号	直径
PBX120M	120cm
PBX150M	150cm
PBX180M	180cm
* DM4/CLL-3000、4800系列适用	



单柔光箱
Softbox

柔光箱+内柔光布
Softbox + Inner Diffuser

柔光箱+内外柔光布
Softbox + Diffusers

柔光箱+内外柔光布+蜂巢
Softbox + Diffusers + Grid

标配套装清单 / Standard kit content



- 1** 柔光箱
Softbox
- 2** 内+外柔光布
Inner and outer diffuser
- 3** 蜂巢
Grid
- 4** 收纳布袋
Bag
- 5** 遮光布
Cover cloth

易撑柔光箱安装 Foldable softbox installation

易撑柔光箱安装步骤：“拉”“按”即可完成易撑柔光箱的安装、收起。

Foldable softbox installation steps: one "pull" and one "press" to complete the installation step.



安装提示：把柔光箱直立地面，一只手固定，另一只手拉住伞骨向上提，听到“啷嗒”响即可。同样方法把剩余的伞骨撑开(温馨提示：对角上提伞骨，撑开更加轻松哦)。打开柔光箱后先把柔光箱安装到灯具卡口，固定好后，再粘贴遮光布、柔光布、蜂巢格栅，最后完成安装。

Installation tips: Put the softbox upright on the ground, fix it with one hand, and hold the umbrella rib with the other hand and lift it up until you hear a "tick" sound. Open the remaining ribs in the same way (warm reminder: lift the ribs diagonally to make it easier to open). After opening the softbox, install the softbox to the bayonet of the lamp. After fixing it, install the shading cloth, diffuser, and grid to complete the installation.

收起提示：往下按住锁扣，另一只手拉起伞骨向上提，听到响声松手，同样方法收起伞骨即可完成柔光箱收起。

Reminder: Hold down the lock, the other hand pulls up the umbrella rib and lifts it up. When you hear the "tick" sound then let go, the same method can be used to close the softbox.

180度旋转支撑架 180 degree rotating support frame

此配件是固定于柔光箱卡环周的底部，直接支撑在灯架上，使柔光箱的支撑状态更容易掌握调节，是特别配置给没有上下旋转能力的灯具或者U架锁紧能力较小的灯具，能更好的掌握调节与锁紧，使柔光箱不会下垂，另有指定卡口尺寸聚光灯上也可以使用。

This accessory is fixed at the base of the softbox bayonet and directly supported on the light stand, so that the support state of the softbox is easier to control and adjust. It is specially configured to hold lamps that do not have the ability to rotate up and down, and to avoid sagging of the softbox. It can also be applied on other lamps with a designated bayonet size.



RAH-35X

球形柔光箱 Diffusor ball

(DFX85S/DFX105M)



Dm2+DFX85S

Dm4+DFX105M

调焦聚光灯 Focal adjustable Fresnel

P-10TD/100W



双模供电一体调控盒
AC/DC integrated control box



包装清单 / Packing list



P-10TD

四叶挡光板
Barn-door

调控盒
Control Box

2800-6500K可调色温 / 2800-6500K adjustable temperature



P-10TD/100W *不寄货到北美地区 Do not ship to North America

- 输出功率 Out put Wattage 100W
- 灯泡数及功率 LEDs & Power LED 1Pcs x (100W+100W)
- 调控方式 Control Function 旋钮Turning Knob 按键Switch 遥控remote DMX-512
- 色温 Color Temperature 2800-6500K
- 显色度 CRI 97
- 工作电压 Operating Voltage AC100V-240V
- 兼容性 Compatibility AC POWER 交流电/DC电源
- 照度 Lux 0.5M 109000 1M 18400 2M 4030
- 英尺烛光 Footcandles 0.5M 73700 1M 15200 2M 3560

第二代新升级LED平板补光灯

NEW 2ND GEN UPGRADE LED PANEL



LP-2005TDX II、LP-3005TDX II

- 2500-9999K可调色温
- APP手机智能调控、9种场景特效功能
APP Control、9 scene special effects
- 贴片灯珠+静音风扇散热
SMD LED + silent cooling fan
- 尼龙防爆壳体
Nylon explosion-proof housing



Android:
手机浏览器扫描二维码下载安装
Scan the QR code to download and install

IOS:
App Store搜索“DESAL Lite+”下载安装
Search “DESAL Lite+” in App Store to
download and install

LED平板补光灯 LED PANEL

第二代
2ND GENERATION

全新升级，更智能更耐用
Smarter and more durable



LP-2005TDX II (100W)



LP-3005TDX II (150W)



2500-9999K
APP智能调控 APP control
双模供电 AC/DC integrated
9种场景特效 9 SPECIAL EFFECTS



LP-2005TDX II (背面/Back)



LP-3005TDX II (背面/Back)



单灯标配清单
Single lamp standard content

Model No. 型号	LP-2005TDX II	LP-3005TDX II
LEDs & Power LED 灯泡数及功率	0.5Wx502Pcs	0.5Wx572Pcs
Out put Wattage 输出功率	100W	150W
Color Temperature 色温	2500-9999K	2500-9999K
Operating Voltage 工作电压	DC-16.8V 8A	DC-16.8V 10A
Dimming 调光	亮度0-100% 色温 2500K-9999K	亮度0-100% 色温 2500K-9999K
Compatibility 兼容性	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座	AC Adaptor 适配器 Sony V Mount Battery (DC) V卡口电池座
Control Function 调控方式	旋钮Turning Knob 按键Switch 蓝牙 9个模式 CH	旋钮Turning Knob 按键Switch 蓝牙 9个模式 CH
CRI 显色度	95	95
Lux 照度	0.5M 26200 / 1M 7450 / 2M 1910	0.5M 36100 / 1M 11000 / 2M 2900
Beam Angle 照射角度	48°	48°
Footcandles 英尺烛光	0.5M 2434 / 1M 692 / 2M 177	0.5M 3355 / 1M 1022 / 2M 269
Dimensions 机身尺寸	450x240x62mm	455x340x62mm
Weight 重量	2.96Kg	3.3Kg
Noise Level (dB) 噪音分贝强度	0.2M:36.6dB 0.5M:35.6dB	0.2M:36.6dB 0.5M:35.6dB
In the box 配件	AC Adaptor 适配器/U-Bracket U架/Carry Bag 布袋	AC Adaptor 适配器/U-Bracket U架/Carry Bag 布袋