

Standard Quick-Open Softbox

FOB-i70

Standard Quick-Open Softbox
Model: FOB-i70
Material: KP Fabric
Size Option: 60cm/70cm/90cm/120cm

FOB-V60

Premium Quick-Open Softbox
Model: FOB-V70
Material: Gridded Fabric (Elastic Edge Binding)
Size Option: 60cm/70cm/90cm/120cm



U-Shaped Curved Reflector



FE612



1.55 kg/set
Suitable for 25 mm round or square tubes

D30 30W Handheld LED Light

3200mAh Type-C Easy Operation Cooling System

Model: D30
Power: 30W+30W COB 1Piece
Color Temperature: 2500-6500K (5-level adjustment)
Illuminance: 1350lux
DC Output: USB DC 5V 2A
DC Input: Type-C DC 5V 2A(MAX)
Battery Life: 1h at full power
Battery Capacity: 3200mAh/33.5Wh
CRI: 96+
Product Weight: 0.4Kg
Product Size: 198×75×63mm

J300XBi CRMx

300W 2500-6500K CRI≥96+ APP

Power: 300W Warm + 300W White
Color Temperature: 2500K-6500K
Operating Voltage: AC220V
Compatibility: AC POWER
Dimming: 9 Scene Modes, Bluetooth, 1.3-inch TFT Color Screen, 4 Dimming Curves
0-100% Step-less Dimming
Control Mode: ON/OFF Switch / Dimming Knob / Remote Control
Beam Angle: 18°Spotlight Angle
CRI: 96

J300Bi




FALCON EYES LTD.

Unit F25, 1/F, Hung Hom Square,
39 Ma Tau Wai Road, Hung Hom,
Kowloon, HONG KONG.

+86 159755412429
sales@falconeyeshk.com
[www.falconeyeshk.com]

60W FE-L60DS

High-Brightness Portable LED Light

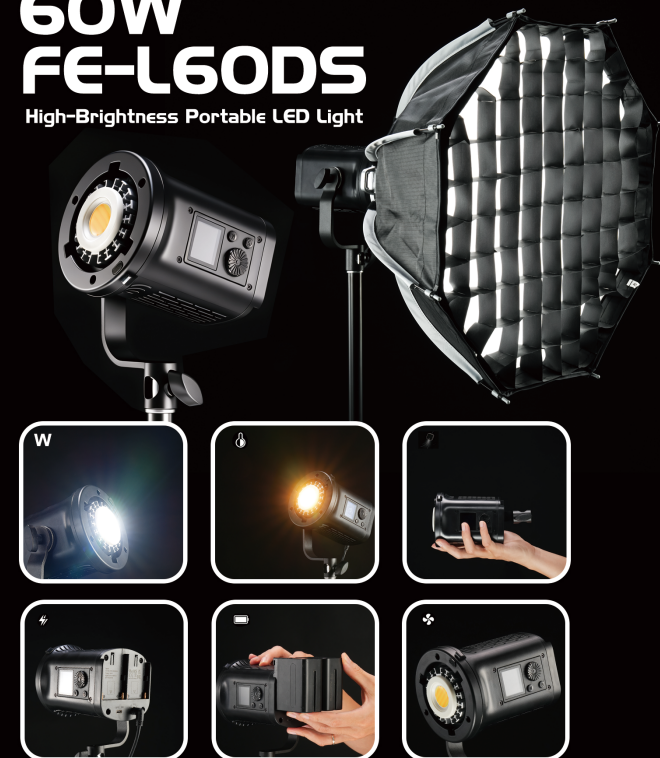

Power: 60W
Luminous Flux: 4000LM
Light Source: Integrated COB LED Chip
CRI: 96
Color Temperature: 2500K-6500K ±200K
Dimming Range: 0%-100%
Compatible Battery Model: NP-F960 ×2
Special Effects: 3 Modes (Fireworks, Broken-bulb, Lightning)
Overheat Protection: Yes
Light Fixture Power Input: DC 20V, 80W
Power Adapter: Input: 100-240V~ 50/60Hz,
Output: DC 20V 4A, DC 5.5×2.1 Plug
Product Dimension: 100×100×126mm
(L-shaped Bracket Not Included)

LED Bi-Color Remote-Controlled Bulb 40W (E27)



1. Power: 40W Press [ON/OFF].
2. Brightness: (10%-100%)
3. Color temperature: (range: 2500K-7500K)
4. Color Presets: Press [M] to toggle between 3200K, 4400K, and 5500K.
5. Night Light Mode: Press [N].

Built-in Battery Soft Panel Light



1. LED Quantity: 58 pcs × 6500K cool-white beads, 58 pcs × 2500K warm-white beads
2. Power : 11W
3. Illuminance: 700Lux (at 0.5-meter distance)
4. CRI 96
5. CCT Range: 2500K-6500K
6. Display Screen: LCD Screen
7. Control Mode: 2-position toggle switch & potentiometer adjustment
8. Dimming Range: 0-100%
9. Power Supply: Built-in 14.8Wh lithium-polymer battery
10. Battery Capacity: 3.7V 4000mAh

100W LED Projection Spotlight



100W LED Projection Spotlight
Model: DT120
Power: 100W
CCT: 2700K-6500K
CRI: 95
Net Weight: 590g
Input Voltage: 20V / 5A
Dimming Range: 1-100%
Power Supply: Type-C / Battery
Illuminance: 3200 Lux (Bare Light)
Control: Knob / Smart Control App
Battery Capacity: 9000mAh
Runtime: 50-55 min
Charging Time: 4H
FX Modes: 10 FX (Pulse, Candlelight, Bad Bulb, Breathing, Lightning, Fireworks, Paparazzi, TV, High-Speed Low Light, SOS)
In the Box: Light Fixture ×1, Charging Cable ×1, Lens ×1
Product Dimensions: 271 × 60 × 66mm
Package Dimensions: 35.5 × 10.8 × 10.8cm
Carton Dimensions: 56 × 27.5 × 37.5cm

200W Bi-Color LED Video Light



CCT: 2700K-6500K
Power: 200W
CRI: 98+
Dimming: 0-100%
Illuminance: 8,616 lux @ 1m (6500K), bare light
FX: 10 Built-in Effects
Control: Onboard Knob / Smart Control App
Power Input: DC24V / TPYC-24V
Mounting: Gimbal Mount
Dimensions: 185 × 117 × 72 mm
Weight: 770g
Included: Light ×1 + Fresnel Lens ×1
Packing: 8 pcs/carton
Optional: DC24V Adapter (not included in quoted price)

150W Bi-Color LED Video Light



CCT: 2700K-6500K
Power: 150W
CRI: 95
Dimming: 0-100%
Illuminance: 5,484 lux @ 1m (6500K), bare light
FX: 10 Built-in Effects
Control: Power Button / Knob / Smart Control App
Mounting: Gimbal Mount
Dimensions: 120 × 108 × 80 mm
Weight: 425g

Mini On-Camera Flash

Hi06

Model: Hi06
CCT: 2700K-7000K
Dimensions: 82 × 44 × 23mm
Net Weight: 56g
CRI: 95
Charging Port: Type-C
Power Supply: Battery
Input Voltage: 5V
Control: Buttons
Dimming: 3 Levels (Cool / Neutral / Warm)
Illuminance: 282.4 Lux @ 0.3m (7000K, Bare Light)
Battery Life: Approx. 500 flashes at full power
Charging Time: Approx. 70 min (0-100%)
Recycle Time: 3 sec (1/1 Power to Full Charge)
Battery: 3.7V / 300mAh
Mounting Interface: Hot Shoe
In the Box: Flash ×1, Charging Cable ×1
Color Box Dimensions: 70 × 48 × 125mm
Carton Dimensions: 51 × 37 × 27cm

