

## PRODUCT SPECIFICATION (产品参数)

Model No. 型号	 BL-30T	 RX-718/736	 LB-16/32
• LEDs & Power LED灯泡数及功率	1pc	216pcs x0.5W<White>/216pcs x0.5W <Yellow>216pcs x0.5<RGB> 432pcs x0.5W<White>/432pcs x0.5W <Yellow>432pcs x0.5<RGB>	100pcs x 0.5W/200pcs x 0.5W
• Out put Wattage 输出功率	300W	Input:192W Output:100W Input:384W Output:200W	16W / 32W
• Color Temperature 色温	5600K	2700K-9999K	3000K-5600K
• Operating Voltage 工作电压	DC-24V 15A	DC-15V 7A / DC-24V 10A	DC-12V 2A Charger充电器
• Compatibility 兼容性	AC Adapter Sony V Mount Battery(DC)	AC Adapter Sony V Mount Battery(DC)	Battery锂电池 7.4V 24Wh / 45Wh
• Dimming 调光	Color Temperature5600K 0-100% Intensity	0-100% step-less dimming ON/OFF Tuning Knob	0-100% step-less dimming
• Beam Angle 照射角度	46° -64°	10° -360°	60°
• Control Function 调控方式	Touch Screen 2.4G Mutal Control	Color Matrix Display/DMX-512 /Turning Knob/RC-5	Turning Knob/RC-3T /Mutual Control
• CRI 显色度	95	95	95
• Lux (0.5M / 1M / 2M) 流明 (0.5M / 1M / 2M)	0.5M:54100 1M:11000 2M:2550	5600K(RGB)0.5M:7600 1M:2340 2M:622 2700K 0.5M:5230 1M:1620 2M:430 5600K 0.5M:6370 1M:1970 2M:521 5600K(RGB)0.5M:11000 1M:4030 2M:1120 2700K 0.5M:7790 1M:2860 2M:796 5600K 0.5M:9320 1M:3470 2M:954	3000K(8W) 0.5M:450 1M:121 2M:32.1 5600K(16W) 0.5M:990 1M:261 2M:71.1 3000K(16W) 0.5M:688 1M:248 2M:73.6 5600K(32W) 0.5M:1410 1M:527 2M:159
• Footcandles 英尺烛光	0.5M:5027 1M:1022 2M:237	5600K(RGB) 0.5M:706 1M:217 2M:58 2700K 0.5M:486 1M:151 2M:40 5600K 0.5M:592 1M:183 2M:48 5600K(RGB) 0.5M:1022 1M:374 2M:104 2700K 0.5M:724 1M:265 2M:74 5600K 0.5M:866 1M:322 2M:88	3000K(8W) 0.5M:41 1M:11 2M:3 5600K(16W) 0.5M:90 1M:24 2M:6.5 3000K(16W) 0.5M:63 1M:23 2M:7 5600K(32W) 0.5M:129 1M:48 2M:15
• Mounting Method 安装配套	U-BRACKET	X-Frame+CLD-14	LB-A 连接件 connector 1/4 Stud
• Dimensions 机身尺寸	480x200x180mm	610x460mm / 1120x465mm	600x45.5mm/1200x45.5mm
• Weight 重量	Light:2.9kg Control Box:1.32kg AC Aadtptor 24V/15A:1.39kg	Light:0.63kg Control Box:0.8kg AC Aadtptor 15V/7A:0.47kg Light:1.25kg Control Box:0.8kg AC Aadtptor 24V/10A:0.9kg	0.48kg / 0.93kg
• Noise Level(dB) 噪音的分贝强度	0.2M:57.5dB / 0.5M:49.4dB	---	---
• In the box 配件	Reflector 标准罩 SR-18	AC Aadtptor 15V/7A, BAG AC Aadtptor 24V/10A, BAG	charger 连接件 connector:LB-A
• Optional Accessories 选购配件	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control遥控器:RC-3T	SP-XC04H7(4m) SP-XC06H7(6m) SP-XC08H7(8m) SP-XC10H7(10m) Remote-control遥控器:RC-5	RC-3T 手柄 Handle:MP-155A

## 锐鹰有限公司(FALCON EYES LTD.)

**Address** 香港九龙红磡鹤园街2G号恒丰工业大厦一期11字楼E1室  
Unit E1, 11/F, Phase 1, Hang Fung Building, 2G Hok Yuen Street,  
Hung Hom, Kowloon, Hong Kong

**Tel** 852-2363-2825 **Email** info@falconeyes.com.hk

**Fax** 852-2363-3856 **Website** www.falconeyes.com.hk



锐鹰官方网站 (香港)  
Falcon Eyes Ltd Official Site (HK)



## 锐鹰影视器材 精选

■ 300W强力LED摄影摄像灯 ■ RGB 7彩卷布灯RX-718/736 ■ LED光管灯LB-16/32



## 锐鹰有限公司(FALCON EYES LTD.)

www.falconeyes.com.hk  
www.falconeyes.com.us

## 300W LED SPOT LIGHT: BL-30T / BL-30TD 300W强力LED摄影摄像灯

Falcon Eyes had developed new models for BL series which are BL-30T & BL-30TD and designed with high power output. Comparing with the similar types of LED lights, BL-30T/ TD has a much powerful LUX and more compact.

BL-30T is single color version (5600K) and BL-30TD is bi-color version from 3000K-8000K. The maximum output reach 300W, moreover BL-30T/ TD are supported with AC power or V-mount battery so there are more flexibility on power source and enable for outdoor using.

BL-30T/ TD are equipped the control boxes with LCD touch screen control. Desirable light can be adjusted easily. It is implanted with DMX feature and 2.4G remote control feature (RC-3T). BL-30T/ TD are equipped with silent cooling fan which can ensure the stability of the lights and the product life. Kit set with well equipment is available.

锐鹰为BL系列研发了两款全新型号BL-30T和BL-30TD, 比以往同类型的灯更为轻便。

BL-30T 是单色温型号 (5600K) 及 BL-30TD 双色温型号 (3000K-8000K), 其最大的功率可达至300W 并支援电池供电和AC电源, 令你在不同的拍摄环境有更多的供电选择。

BL-30T/ TD 配备触屏控制盒, 令你可以更准确地调节输出, 调出理想的光源。而且均有植入DMX系统和接受功能配合RC-3T遥控器使用。BL-30T/ TD 配备了散热风扇, 使其在高输出时表现更稳定并能保障灯具寿命。此款灯会配合多配件套装发售。



BL-30T  
(Suit套装)

LED摄像灯 (支援电池)  
LED Spot Light  
(battery support)  
BL-30T x1

灯架  
LMC-2100 x1

聚光筒  
Optical Snoot  
LPSA-BOF x1

柔光箱  
Softbox PSB-9 x1

套装箱  
Suit bag CC-20 x1



## LED LIGHTPIPE: LB-16/32 LED光管灯 LB-16/32

The LB-bar LED is a handy LED bar which generates beautiful soft light. It is perfect to use in studio or outdoor as it contains rechargeable battery. The white diffuser is more than 180° which the light is spreading more evenly.

There is also a connecting accessory which able to combine multiple units to form a longer light tube. The color temperature is from 3000K-5600K adjustable and there is a 2.4 remote RC-3T available to control multiple units (Optional accessories).

LB-16及LB-32 LED灯棒可以制造柔和的灯光, 合适在影室或户外使用。机体内置锂电池, 可充电循环使用。表面的弧形柔光片更超过180度, 令灯光分布更均匀。

LED灯棒可以配合连接配件使用, 连接成更长的灯棒。色温更可调节从3000K-5600K。配合2.4G遥控器RC-3T (选购配件) 可以令多支LED灯棒同步调较。



## ROLL-FLEX RGB SERIES: RX-718/736 RGB 7彩卷布灯 RX-718/736

### Roll-Flex RGB Series

Falcon Eyes new RGBW LED tech has been applied to the best selling Roll-flex series. With the flexibility of the Roll-able LED mat and RGB LED, more lighting effects can be made and sure can help to transfer your imagination to actual practice.

The Roll-Flex RGB is also supported with DMX control which allows even more possibility on application. With DMX control Roll-Flex RGB light can be programmed to create different motion background like police car light or any color movement effect. This will be a great solution on portable effect lights and small video production.

### 7彩卷布灯


锐鹰把最新的RGB LED灯技术套用到最畅销的卷布灯上, 卷布灯的功能配合RGB LED灯可创造出更多样化的灯光效果, 可以把想像的效果转化为实践。

7彩卷布灯同时亦支援DMX控制系统, 而且可令7彩卷布灯的应用富更多可能性。配合DMX控制的7彩卷布灯可以编入程式, 作出不同的动感光效, 如警车灯效果, 或其他任何动态光效。这将会成为在影视及舞台上的一一个优质解决方案。



DMX-READY  
DMX操控

COLORITE  
高显色

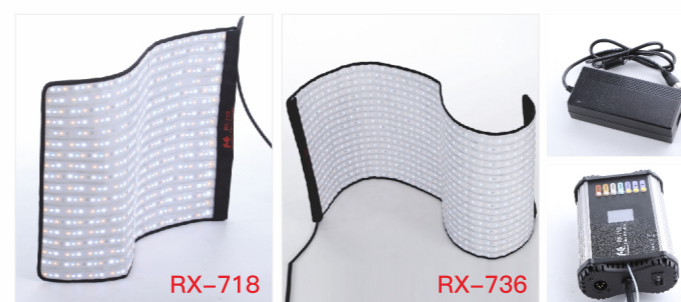

### OPTIONAL ACCESSORIES 可选配件



### IN THE BOX 配件

#### (RX-718)

RX-718-K1: One Light Kit (单灯套装)  
RX-718 x 1  
RX-18SBHC x 1  
WPC-1.5 x 1

RX-718-K2: Two Light Kit (双灯套装)  
RX-718 x 2  
RX-18SBHC x 2  
WPC-1.8 x 1

#### (RX-736)

RX-736-K1: One Light Kit (单灯套装)  
RX-736 x 1  
RX-36SBHC x 1  
WPC-1.7 x 1

RX-736-K2: Two Light Kit (双灯套装)  
RX-736 x 2  
RX-36SBHC x 2  
WPC-3.4 x 1

## Accessories 配件



CLD-16

安全箱 Safety box: WPC-1.5  
外尺寸 Outer size: 520x340x135mm  
内尺寸 Internal size: 500x300x120mm

安全箱 Safety box: WPC-1.6  
外尺寸 Outer size: 611x440x193mm  
内尺寸 Internal size: 590x390x180mm

安全箱 Safety box: WPC-1.7  
外尺寸 Outer size: 555x460x185mm  
内尺寸 Internal size: 500x400x165mm

安全箱 Safety box: WPC-1.8  
外尺寸 Outer size: 555x460x225mm  
内尺寸 Internal size: 500x400x210mm

安全箱 Safety box: WPC-3.4  
外尺寸 Outer size: 575x421x287mm  
内尺寸 Internal size: 515x360x245mm