

## 产品参数 / PRODUCT SPECIFICATION

型号 Model No.			
	R1	R2	RB3
LED灯泡数 LEDs	64pcs x 0.5W<白> 64pcs x 0.5W<黄>	100pcs x 0.5W<白> 100pcs x 0.5W<黄>	99pcs x 0.5W<白> 99pcs x 1.5W<彩>
功率 Out put Wattage	20W	40W	40W
色温 Color Temperature	2800K-6500K	2800K-6500K	2800K-10000K
工作电压 Operating Voltage	DC-15V 3A	DC-15V 5A	DC-15V 5A
兼容性 Compatibility	适配器 AC Adaptor 锂电池 Sony F Mount Battery		
调光 Dimming	0-100% Step-less dimming ON/OFF 开关 6个场景模式 Six Different Built-in Effect 2.4G接收模块 Built-in 2.4G Remote Control.		0-100% Step-less dimming ON/OFF 开关 Turning Knob 旋钮
调控方式 Control Function	Turning Knob 旋钮 remote 遥控 RC-5		HSI调节功能 HSI adjustment function 2.4G遥控 2.4G Remote Control RGBW单独调节功能 Individual RGBW Adjustment 七色选择跳变功能 7-color selection HSI彩色循环功能 HSI Gradual function 快速色温选择功能 Quick Color Temperature Selection function
照射角度 Beam Angle	2800K 63° 6500K 63°	2800K 62° 6500K 62°	2800K 64° 5600K 65°
显色度 CRI	97	97	5600K/95
照度 Lux	2800K: 0.5m 2480 1m 604 2m 156 6500K: 0.5m 2870 1m 691 2m 180	2800K: 0.5m 4830 1m 1150 2m 305 6500K: 0.5m 5830 1m 1400 2m 369	2700K: 0.5m 4580 1m 1150 2m 294 5600K: 0.5m 4550 1m 1140 2m 292
英尺烛光 Footcandles	2800K: 0.5m 230 1m 56 2m 14 6500K: 0.5m 267 1m 64 2m 17	2800K: 0.5m 449 1m 107 2m 28 6500K: 0.5m 542 1m 130 2m 34	3000K: 0.5m 426 1m 107 2m 27 5600K: 0.5m 423 1m 106 2m 27
安装配套 Mounting Method	MBH-2B多功能金属云台 Multifunctional metal ball head	U架 U-BRACKET 适配器 AC Adaptor	U架 U-BRACKET 适配器 AC Adaptor
机身尺寸 Dimensions	224x114x46mm	303x260x46mm	296x284x68mm
重量 Weight	0.68kg	1.53kg	1.46kg



PATENT PRODUCT!  
专利产品!

## RAINBOW 彩虹 特效补光灯 Special Effect LED Light

### R1、R2

双色温2800-6500K可调,全功率输出; 内设6个场景模式:  
闪电一、闪电二、电视荧幕、烛光、狗仔队、频闪;  
内置2.4G接收模块,可遥控。

Bi-color 2800-6500K full power output, Six Different Built-in Effect  
Lightning 1, Lightning 2, TV Lighting, Candlelight, Paparazzi, Strobe;  
Built-in 2.4G Remote Control.

### RB3

4色LED灯珠RGBW,混色色温2800K-10000K,  
最大功率40W, 具备HSI调节功能, 2.4G遥控功能,  
RGBW单独调节功能, 七色选择跳变功能,  
HSI彩色循环功能, 快速色温选择功能。

4-color LED RGBW, Bi-color 2800K-10000K,  
Maximum power 40W, with HSI adjustment function,  
2.4G Remote Control,  
Individual RGBW Adjustment, 7-color selection,  
HSI Gradual function,  
Quick Color Temperature Selection function.



### R1 (20W)

2800K-6500K  
224x114x46mm

### R2 (40W)

2800K-6500K  
303x260x46mm




### 特效场景功能 / SPECIAL EFFECTS SCENE



### RB3 (40W)

2800K-10000K 296x284x68mm

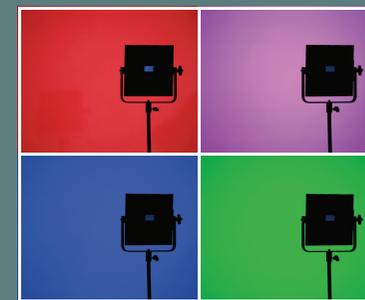



特效场景功能  
SPECIAL EFFECTS SCENE



闪电 Lightning 烛光 Candle 慢闪 Slow Flash 快闪 Flash 隧道 Tunnel

## 联星LED柔光灯 Linkstar LED Soft Light

PATENT PRODUCT!  
专利产品!

200TD&300TD, 双色温2800K-6500K全功率输出, 具备2.4G遥控功能、预设5个场景模式(闪电, 烛光, 慢闪, 快闪, 隧道)  
200TD & 300TD, Bi-color 2800K-6500K full power output, With 2.4G remote control function, preset 5 scene effects (Lightning, Candlelight, Slow Flash, Flash, Tunnel)



LED-200TD

100W  
2800-6500K

LED-300TD

150W  
2800-6500K

## 产品参数 / PRODUCT SPECIFICATION

型号 Model No.		
	LED-200TD	LED-300TD
LED灯泡数 LEDs	432pcs x 0.5W	600pcs x 0.5W
输出功率 Out put Wattage	100W	150W
色温 Color Temperature	2800-6500K	
工作电压 Operating Voltage	DC-15V 7A	DC-15V 10A
兼容性 Compatibility	适配器 AC Adaptor V卡口电池座 Sony V Mount Battery (DC)	
调光 Dimming	0-100% Stepless Dimming 0-100% 旋钮 Turning Knob 2.4G遥控(2.4G remote) 5个场景模式(Five Different Built-in Effect )	
调控方式 Control Function	Turning Knob 旋钮 2.4G遥控(2.4G remote) 5个场景模式(5 scene effects, Lightning, Candlelight, Slow Flash, Flash, Tunnel)	
照射角度 Beam Angle	2800K/60° 5600K/62°	2800K/60° 5600K/62°
显色度 CRI	95	
照度 Lux	2800K 0.5M:10800 1M:2660 2M: 671 5600K 0.5M:13300 1M:3280 2M: 832	2800K 0.5M:13900 1M:3460 2M: 875 5600K 0.5M:17100 1M:4330 2M: 1090
英尺烛光 Footcandles	2800K 0.5M:1004 1M:247 2M: 62 5600K 0.5M:1236 1M:305 2M: 77	2800K 0.5M:1292 1M:322 2M: 81 5600K 0.5M:1589 1M:402 2M: 101
安装配套 Mounting Method	U架 U-BRACKET	
机身尺寸 Dimensions	525×360×130mm	520×440×120mm
重量 Weight	3.14kg	3.715kg
噪音分贝强度 Noise Level (dB)	0.2M:35dB 0.5M:34.9dB	0.2M:35.1dB 0.5M:34.8dB

# 联星LED卷布灯 Linkstar LED Flex Light

PATENT PRODUCT!  
专利产品!



LX-50 | 50W | 3000-5600K



LX-100 | 100W | 3000-5600K



LX-150 | 150W | 3000-5600K

## 产品参数 / PRODUCT SPECIFICATION

型号 Model No.	LX-50	LX-100	LX-150
LED灯泡数 LEDs	144pcs <白> 144pcs <黄>	252pcs <白> 252pcs <黄>	378pcs <白> 378pcs <黄>
输出功率 Out put Wattage	50W	100W	150W
色温 Color Temperature	3000K-5600K	3000K-5600K	3000K-5600K
工作电压 Operating Voltage	DC-15V 5A	DC-15V 7A	DC-15V 10A
兼容性 Compatibility	适配器 AC Adaptor V卡口电池座 Sony V Mount Battery (DC)		
调光 Dimming	0-100% Step-less dimming ON/OFF 开关 Touch Screen 触屏		
调控方式 Control Function	触屏 Touch Screen 互控 Mutual Contral		
照射角度 Beam Angle	3000K 61° 5600K 62°	3000K 62° 5600K 63°	3000K 62° 5600K 63°
显色度 CRI	95		
照度 Lux	3000K: 0.5m 6220 1m 1630 2m 435 5600K: 0.5m 6950 1m 1810 2m 483	3000K: 0.5m 10400 1m 2990 2m 788 5600K: 0.5m 11500 1m 3300 2m 875	3000K: 0.5m 14580 1m 4350 2m 1141 5600K: 0.5m 16050 1m 4475 2m 1267
英尺烛光 Footcandles	3000K: 0.5m 578 1m 151 2m 40 5600K: 0.5m 646 1m 168 2m 45	3000K: 0.5m 967 1m 278 2m 73 5600K: 0.5m 1069 1m 307 2m 81	3000K: 0.5m 1355 1m 404 2m 106 5600K: 0.5m 1491 1m 445 2m 118
机身尺寸 Dimensions	320×320mm	612×305mm	610×480mm
重量 Weight	Contral Box 电源: 0.7Kg Light 布灯: 0.28Kg	Contral Box 电源: 0.7Kg Light 布灯: 0.47Kg	Contral Box 电源: 1.05Kg Light 布灯: 0.73Kg
配件 In the box	Softbox 柔光箱 LX-50SB Softbox 蜂巢柔光箱 LX-50HC	Softbox 柔光箱 LX-100SB Softbox 蜂巢柔光箱 LX-100HC	Softbox 柔光箱 LX-150SB Softbox 蜂巢柔光箱 LX-150HC

# 联星LED小型聚光灯 Linkstar LED Mini Fresnel

PATENT PRODUCT!  
专利产品!



F-1.5 | 15W | 5600K



F-3 | 30W | 3000K/5600K



## 产品参数 / PRODUCT SPECIFICATION

型号 Model No.		
	F-1.5	F-3
LED灯泡数 LEDs	1pcs x 15W	1pcs x 30W
输出功率 Out put Wattage	15W	30W
色温 Color Temperature	5600K	3000K/5600K
工作电压 Operating Voltage	DC-7.4V	DC-15V 5A
兼容性 Compatibility	锂电池 Sony F Mount Battery	适配器 AC Adaptor V卡口电池座 Sony V Mount Battery (DC)
调光 Dimming	0-100% Stepless Dimming 0-100% 无极调光	
调控方式 Control Function	开关 ON/OFF 旋钮 Turning Knob	
照射角度 Beam Angle	47°	20°-44°
显色度 CRI	95	95
照度 Lux	散光(FLOOD): 0.5m 4446 1m 1276 2m 314	散光(FLOOD): 0.5m 9830 1m 2430 2m 606 3m 292 5m 130 聚光(FOCUS): 0.5m 18400 1m 7040 2m 1800 3m 749 5m 333
英尺烛光 Footcandles	散光(FLOOD): 0.5m 413 1m 119 2m 29	散光(FLOOD): 0.5m 914 1m 226 2m 56 3m 27 5m 12 聚光(FOCUS): 0.5m 1710 1m 654 2m 167 3m 70 5m 31
安装配套 Mounting Method	MBH-2B多功能金属云台 Multifunctional metal ball head	L-Bracket L架
机身尺寸 Dimensions	100x112mm	263x141mm
重量 Weight	0.57kg	1.55kg
配件 In the box	Sony F Mount Battery锂电池 NP-F550 Carry Bag 布袋 SP-CHG Barndoor 挡光板 L3-BD1 metal ball head 金属云台 MBH-2B	L架 L-Bracket / 布袋 Carry Bag Adaptor DC-15V 5A 适配器 DC-15V 5A V-Mount battery plate V卡口电池座(AD-PS1)
选购配件 Optional Accessories	L-A7	Barndoor 挡光板 L3-BD1 L-A7 灯架: i-2501/B